



# TPS62745 Dual-cell Ultra Low $I_Q$ Step Down Converter for Low Power Wireless Applications

## 1 Features

- Input Voltage Range  $V_{IN}$  from 3.3 V to 10 V
- Typical 400 nA Quiescent Current
- Up to 90% efficiency with load currents  $>15 \mu A$
- Up to 300 mA Output Current
- RF Friendly DCS-Control™
- Low Output Ripple Voltage
- 16 Selectable Output Voltages from
  - 1.8 V to 3.3 V (TPS62745)
  - 1.3 V to 2.8 V (TPS627451)
- Integrated input voltage switch
- Integrated Discharge Function at  $V_{OUT}$
- Open Drain Power Good Output
- Operates with a Tiny 3.3  $\mu H$  or 4.7  $\mu H$  Inductor
- Small 3 mm x 2 mm WSON Package

## 2 Applications

- Bluetooth® Low Energy, RF4CE, Zigbee
- Industrial Metering
- Energy Harvesting

## 3 Description


The TPS62745 is a high efficiency ultra low power synchronous step down converter optimized for low power wireless applications. It provides a regulated output voltage consuming only 400-nA quiescent current. The device operates from two rechargeable Li-Ion batteries, Li-primary battery chemistries such as Li-SOCl<sub>2</sub>, Li-SO<sub>2</sub>, Li-MnO<sub>2</sub> or four to six cell alkaline batteries. The input voltage range up to 10 V allows also operation from a USB port and thin-film solar modules. The output voltage is set with four VSEL pins between 1.8 V and 3.3 V for TPS62745 or 1.3 V and 2.8 V for TPS627451. TPS62745 features low output ripple voltage and low noise with a small output capacitor. An internal input voltage switch controlled by pin EN\_VIN\_SW connects the supply voltage to pin VIN\_SW. The switch is intended to be used for an external voltage divider, scaling down the input voltage for an external ADC. The switch is automatically opened when the supply voltage is below the undervoltage lockout threshold. The TPS62745 is available in a small 12 pin 3 mm × 2 mm WSON package.

### Device Information<sup>(1)</sup>


| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|---------|-----------------|
| TPS62745    | WSON    | 3 mm x 2 mm     |
| TPS627451   |         |                 |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

## 4 Typical Application Schematic

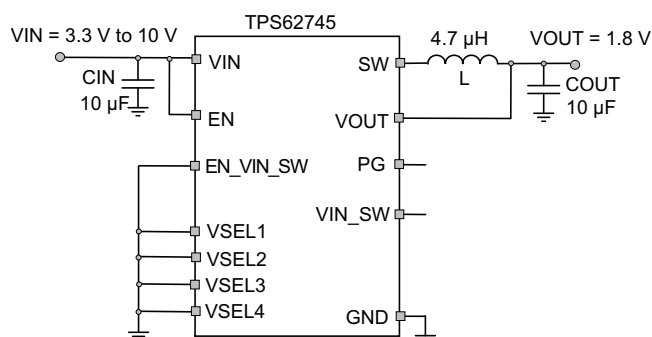

### Efficiency vs Output Current; $V_o = 3.3 V$

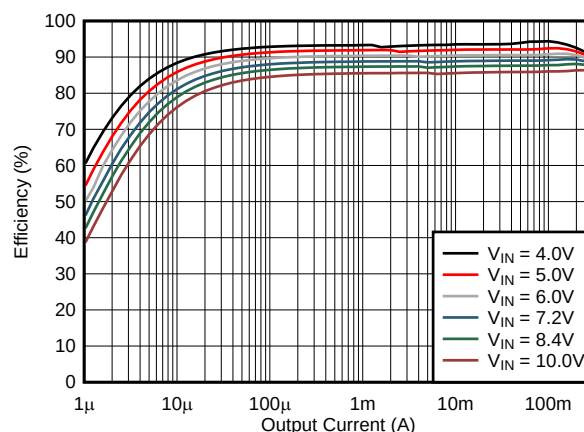

D001



## Table of Contents

|                                                |           |                                                  |           |
|------------------------------------------------|-----------|--------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b>  | 8.5 VOUT Discharge .....                         | 12        |
| <b>2 Applications</b> .....                    | <b>1</b>  | 8.6 Internal Current Limit .....                 | 12        |
| <b>3 Description</b> .....                     | <b>1</b>  | <b>9 Application and Implementation</b> .....    | <b>13</b> |
| <b>4 Typical Application Schematic</b> .....   | <b>1</b>  | 9.1 Application Information.....                 | 13        |
| <b>5 Device Comparison Table</b> .....         | <b>3</b>  | 9.2 Typical Application .....                    | 13        |
| <b>6 Pin Configuration and Functions</b> ..... | <b>3</b>  | 9.3 System Examples .....                        | 21        |
| <b>7 Specifications</b> .....                  | <b>5</b>  | <b>10 Power Supply Recommendations</b> .....     | <b>25</b> |
| 7.1 Absolute Maximum Ratings .....             | 5         | <b>11 Layout</b> .....                           | <b>25</b> |
| 7.2 ESD Ratings .....                          | 5         | 11.1 Layout Guidelines .....                     | 25        |
| 7.3 Recommended Operating Conditions .....     | 5         | 11.2 Layout Example .....                        | 25        |
| 7.4 Thermal Information .....                  | 6         | <b>12 Device and Documentation Support</b> ..... | <b>26</b> |
| 7.5 Electrical Characteristics.....            | 6         | 12.1 Device Support .....                        | 26        |
| 7.6 Timing Characteristics.....                | 8         | 12.2 Related Links .....                         | 26        |
| 7.7 Typical Characteristics .....              | 9         | 12.3 Community Resources.....                    | 26        |
| <b>8 Detailed Description</b> .....            | <b>10</b> | 12.4 Trademarks .....                            | 26        |
| 8.1 Overview .....                             | 10        | 12.5 Electrostatic Discharge Caution.....        | 26        |
| 8.2 Functional Block Diagram .....             | 10        | 12.6 Glossary .....                              | 26        |
| 8.3 Feature Description.....                   | 10        | <b>13 Mechanical, Packaging, and Orderable</b>   |           |
| 8.4 Device Functional Modes.....               | 12        | <b>Information</b> .....                         | <b>26</b> |

### Changes from Original (May 2015) to Revision A

### Page


|                                           |          |
|-------------------------------------------|----------|
| • Changed status to Production Data ..... | <b>1</b> |
|-------------------------------------------|----------|

## 5 Device Comparison Table<sup>(1)</sup>

| Device Number | Output voltage range           | marking |
|---------------|--------------------------------|---------|
| TPS62745      | 1.8 V to 3.3 V in 100-mV steps | PD5I    |
| TPS627451     | 1.3 V to 2.8 V in 100-mV steps | PD6I    |

(1) For all available packages, see the orderable addendum at the end of the datasheet.

## 6 Pin Configuration and Functions

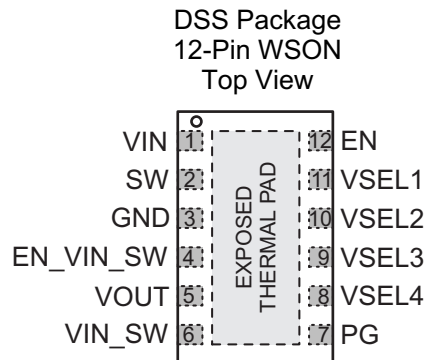

### Pin Functions

| PIN                 |     | I/O | DESCRIPTION                                                                                                                                                                                                                               |
|---------------------|-----|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                | NO. |     |                                                                                                                                                                                                                                           |
| VIN                 | 1   | PWR | V <sub>IN</sub> power supply pin. Connect this pin close to the VIN terminal of the input capacitor. A ceramic capacitor of 4.7 µF from this pin to GND is required.                                                                      |
| SW                  | 2   | OUT | This is the switch pin which is connected to the internal MOSFET switches. Connect the inductor to this terminal.                                                                                                                         |
| GND                 | 3   | PWR | GND supply pin. Connect this pin close to the GND terminal of the input and output capacitor.                                                                                                                                             |
| EN_VIN_SW           | 4   | IN  | This pin connects / disconnects the internal switch from VIN to pin VIN_SW. With EN_VIN_SW = Low, the switch is open. With EN_VIN_SW = High, the switch is closed connecting VIN with VIN_SW. If not used, the pin should be tied to GND. |
| VOUT                | 5   | IN  | Feedback pin for the internal feedback divider network and regulation loop. Connect this pin directly to the output capacitor with a short trace.                                                                                         |
| VIN_SW              | 6   | OUT | This is the output of a switch connecting VIN with VIN_SW when EN_VIN_SW = High. If not used, leave this pin open.                                                                                                                        |
| PG                  | 7   | OUT | This is an open drain power good output.                                                                                                                                                                                                  |
| VSEL4               | 8   | IN  | Output voltage selection pins. See <a href="#">Table 1</a> and <a href="#">Table 2</a> for V <sub>OUT</sub> selection. These pins must be terminated.                                                                                     |
| VSEL3               | 9   | IN  |                                                                                                                                                                                                                                           |
| VSEL2               | 10  | IN  |                                                                                                                                                                                                                                           |
| VSEL1               | 11  | IN  |                                                                                                                                                                                                                                           |
| EN                  | 12  | IN  | High level enables the devices, low level turns the device into shutdown mode. This pin must be terminated.                                                                                                                               |
| EXPOSED THERMAL PAD |     | NC  | Not electrically connected to the IC. Connect this pad to GND and use it as a central GND plane.                                                                                                                                          |

**TPS62745, TPS627451**

SLVSC68A –JUNE 2015–REVISED JUNE 2015

[www.ti.com](http://www.ti.com)
**Table 1. Output Voltage Setting for TPS62745**

| Device   | VOUT / V | VSEL4 | VSEL 3 | VSEL 2 | VSEL 1 |
|----------|----------|-------|--------|--------|--------|
| TPS62745 | 1.8      | 0     | 0      | 0      | 0      |
|          | 1.9      | 0     | 0      | 0      | 1      |
|          | 2.0      | 0     | 0      | 1      | 0      |
|          | 2.1      | 0     | 0      | 1      | 1      |
|          | 2.2      | 0     | 1      | 0      | 0      |
|          | 2.3      | 0     | 1      | 0      | 1      |
|          | 2.4      | 0     | 1      | 1      | 0      |
|          | 2.5      | 0     | 1      | 1      | 1      |
|          | 2.6      | 1     | 0      | 0      | 0      |
|          | 2.7      | 1     | 0      | 0      | 1      |
|          | 2.8      | 1     | 0      | 1      | 0      |
|          | 2.9      | 1     | 0      | 1      | 1      |
|          | 3.0      | 1     | 1      | 0      | 0      |
|          | 3.1      | 1     | 1      | 0      | 1      |
|          | 3.2      | 1     | 1      | 1      | 0      |
|          | 3.3      | 1     | 1      | 1      | 1      |

**Table 2. Output Voltage Setting for TPS627451**

| Device    | VOUT / V | VSEL4 | VSEL 3 | VSEL 2 | VSEL 1 |
|-----------|----------|-------|--------|--------|--------|
| TPS627451 | 1.3      | 0     | 0      | 0      | 0      |
|           | 1.4      | 0     | 0      | 0      | 1      |
|           | 1.5      | 0     | 0      | 1      | 0      |
|           | 1.6      | 0     | 0      | 1      | 1      |
|           | 1.7      | 0     | 1      | 0      | 0      |
|           | 1.8      | 0     | 1      | 0      | 1      |
|           | 1.9      | 0     | 1      | 1      | 0      |
|           | 2.0      | 0     | 1      | 1      | 1      |
|           | 2.1      | 1     | 0      | 0      | 0      |
|           | 2.2      | 1     | 0      | 0      | 1      |
|           | 2.3      | 1     | 0      | 1      | 0      |
|           | 2.4      | 1     | 0      | 1      | 1      |
|           | 2.5      | 1     | 1      | 0      | 0      |
|           | 2.6      | 1     | 1      | 0      | 1      |
|           | 2.7      | 1     | 1      | 1      | 0      |
|           | 2.8      | 1     | 1      | 1      | 1      |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                                       | PIN                       | MIN  | MAX                  | UNIT |
|---------------------------------------|---------------------------|------|----------------------|------|
| Voltage                               | VIN                       | –0.3 | 12                   | V    |
|                                       | SW, VIN_SW <sup>(2)</sup> | –0.3 | V <sub>IN</sub> +0.3 | V    |
|                                       | EN                        | –0.3 | V <sub>IN</sub> +0.3 | V    |
|                                       | EN_VIN_SW, VSEL1-4        | –0.3 | 6                    | V    |
|                                       | PG                        | –0.3 | 6                    | V    |
|                                       | VOUT                      | –0.3 | 3.6                  | V    |
| Power Good Sink Current               | PG                        |      | 10                   | mA   |
| V <sub>IN</sub> Switch Output Current | VIN_SW                    |      | 10                   | mA   |
| Junction temperature, T <sub>J</sub>  |                           | –40  | 150                  | °C   |
| Storage temperature, T <sub>stg</sub> |                           | –65  | 150                  | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The DC voltage on the SW pin must not exceed 3.6 V

### 7.2 ESD Ratings

|                    |                         |                                                                                          | VALUE | UNIT |
|--------------------|-------------------------|------------------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±2000 | V    |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

|                                                                  |                                                   | MIN | NOM | MAX | UNIT |
|------------------------------------------------------------------|---------------------------------------------------|-----|-----|-----|------|
| Supply voltage V <sub>IN</sub>                                   |                                                   | 3.3 |     | 10  | V    |
| Output current I <sub>OUT</sub>                                  | V <sub>OUT</sub> + 0.7 V ≤ V <sub>IN</sub> ≤ 10 V |     |     | 300 | mA   |
| Effective inductance                                             |                                                   | 2.8 | 4.7 | 6.2 | μH   |
| Capacitance connected to VIN pin                                 |                                                   | 3   | 10  |     | μF   |
| Total effective capacitance connected to VOUT pin <sup>(1)</sup> |                                                   | 5   | 10  | 22  | μF   |
| Operating junction temperature range, T <sub>J</sub>             |                                                   | –40 |     | 125 | °C   |
| Operating ambient temperature range, T <sub>A</sub>              |                                                   | –40 |     | 85  | °C   |

- (1) Due to the DC bias effect of ceramic capacitors, the effective capacitance is lower than the nominal value when a voltage is applied. This is why the capacitance is specified to allow the selection of the smallest capacitor required with the DC bias effect for this type of capacitor in mind. The nominal value given matches a typical capacitor to be chosen to meet the minimum capacitance required.

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS62745 | UNIT |
|-------------------------------|----------------------------------------------|----------|------|
|                               |                                              | DSS      |      |
|                               |                                              | 12 PINS  |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 61.8     | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 70.9     | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 25.7     | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 1.9      | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 25.7     | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 7.2      | °C/W |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

V<sub>IN</sub> = 6 V, T<sub>J</sub> = –40°C to 125°C typical values are at T<sub>J</sub> = 25°C (unless otherwise noted)

| PARAMETER                       |                                          | TEST CONDITIONS                                                                                                              | MIN | TYP | MAX  | UNIT |
|---------------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----|-----|------|------|
| SUPPLY                          |                                          |                                                                                                                              |     |     |      |      |
| V <sub>IN</sub>                 | Input voltage range                      | V <sub>OUT</sub> + 0.7 V ≤ V <sub>IN</sub> ≤ 10 V ; min 3.3 V, whichever value is higher                                     | 3.3 |     | 10   | V    |
| I <sub>Q</sub>                  | Operating quiescent current              | EN = V <sub>IN</sub> , device not switching; I <sub>OUT</sub> = 0 μA; V <sub>OUT</sub> = 2 V; T <sub>J</sub> = –40°C to 85°C |     | 400 | 1960 | nA   |
| I <sub>SD</sub>                 | Shutdown current                         | EN = GND, shutdown current into V <sub>IN</sub> ; T <sub>J</sub> = -40°C to 85°C                                             |     | 130 | 1200 | nA   |
|                                 |                                          | EN = GND, shutdown current into V <sub>IN</sub> ; T <sub>J</sub> = 60°C                                                      |     |     | 830  |      |
| V <sub>TH_UVLO+</sub>           | Undervoltage lockout threshold           | Rising V <sub>IN</sub> ; T <sub>J</sub> = –40°C to 85°C                                                                      |     | 3.1 | 3.3  | V    |
| V <sub>TH_UVLO-</sub>           |                                          | Falling V <sub>IN</sub> ; T <sub>J</sub> = –40°C to 85°C                                                                     |     | 2.9 | 3.1  |      |
| INPUTS (EN, EN_VIN_SW, VSEL1-4) |                                          |                                                                                                                              |     |     |      |      |
| V <sub>IH_TH</sub>              | High level input voltage                 | V <sub>TH_UVLO-</sub> ≤ V <sub>IN</sub> ≤ 10 V                                                                               | 1.2 |     |      | V    |
| V <sub>IL_TH</sub>              | Low level input voltage                  | V <sub>TH_UVLO-</sub> ≤ V <sub>IN</sub> ≤ 10 V                                                                               |     |     | 0.35 | V    |
| I <sub>IN</sub>                 | Input bias current; except EN pin        | T <sub>J</sub> = 25°C                                                                                                        |     |     | 10   | nA   |
|                                 |                                          | T <sub>J</sub> = 60°C                                                                                                        |     |     | 20   |      |
|                                 |                                          | T <sub>J</sub> = –40°C to 85°C                                                                                               |     |     | 50   |      |
| I <sub>IN</sub>                 | Input bias current for EN pin            | T <sub>J</sub> = 25°C                                                                                                        |     |     | 20   | nA   |
|                                 |                                          | T <sub>J</sub> = 60°C                                                                                                        |     |     | 40   |      |
|                                 |                                          | T <sub>J</sub> = –40°C to 85°C                                                                                               |     |     | 100  |      |
| POWER SWITCHES                  |                                          |                                                                                                                              |     |     |      |      |
| R <sub>DS(ON)</sub>             | High side MOSFET on-resistance           | V <sub>IN</sub> = 4 V, I = 140 mA                                                                                            |     | 0.6 | 0.98 | Ω    |
|                                 | Low side MOSFET on-resistance            |                                                                                                                              |     | 0.5 | 0.85 |      |
| I <sub>LIMF</sub>               | High side MOSFET DC switch current limit | 3.6 V ≤ V <sub>IN</sub> ≤ 10 V; device not in soft start                                                                     | 480 | 600 | 720  | mA   |
|                                 | Low side MOSFET DC switch current limit  |                                                                                                                              |     | 600 |      |      |

## Electrical Characteristics (continued)

 $V_{IN} = 6\text{ V}$ ,  $T_J = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  typical values are at  $T_J = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                      |                                           | TEST CONDITIONS                                                                                                                                            |                                | MIN  | TYP   | MAX | UNIT |
|--------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------|-------|-----|------|
| OUTPUT DISCHARGE SWITCH (VOUT) |                                           |                                                                                                                                                            |                                |      |       |     |      |
| R <sub>DSCH_VOUT</sub>         | MOSFET on-resistance                      | EN = GND, I <sub>OUT</sub> = −10 mA into VOUT pin                                                                                                          |                                | 25   | 60    |     | Ω    |
| I <sub>IN_VOUT</sub>           | Bias current into VOUT pin <sup>(1)</sup> | EN = V <sub>IN</sub> , V <sub>OUT</sub> = 2 V                                                                                                              | T <sub>J</sub> = 25°C          | 40   | 100   |     | nA   |
|                                |                                           |                                                                                                                                                            | T <sub>J</sub> = −40°C to 85°C |      | 500   |     |      |
| INPUT VOLTAGE SWITCH (VIN_SW)  |                                           |                                                                                                                                                            |                                |      |       |     |      |
| R <sub>DS(ON)</sub>            | MOSFET on-resistance                      | EN_VIN_SW = High, I <sub>VIN_SW</sub> = 1 mA                                                                                                               |                                | 85   | 160   |     | Ω    |
| I <sub>VIN_SW_LKG</sub>        | VIN-switch leakage current                | EN_VIN_SW = GND; leakage from VIN to VIN_SW when pulled to GND; T <sub>J</sub> = −40°C to 85°C                                                             |                                | -20  |       | 20  | nA   |
| I <sub>VIN_SW</sub>            | VIN-switch current                        |                                                                                                                                                            |                                |      |       | 5   | mA   |
| POWER GOOD OUTPUT (PG)         |                                           |                                                                                                                                                            |                                |      |       |     |      |
| V <sub>TH_PG+</sub>            | Power good threshold voltage              | Rising output voltage on VOUT pin                                                                                                                          |                                | 95   | 97.5  |     | %    |
| V <sub>TH_HYS</sub>            | Power good threshold hysteresis           | Falling output voltage on VOUT pin                                                                                                                         |                                |      | 3     |     |      |
| V <sub>OL</sub>                | Low level output threshold                | 3.3 V ≤ V <sub>IN</sub> ≤ 10 V, EN = GND, current into PG pin I <sub>PG</sub> = 4 mA                                                                       |                                |      |       | 0.3 | V    |
| V <sub>OH</sub>                | High level output threshold               | 3.3 V ≤ V <sub>IN</sub> ≤ 10 V, EN = high, current into PG pin I <sub>PG</sub> = 0 mA                                                                      |                                |      |       | 6   | V    |
| I <sub>IN_PG</sub>             | Bias current into power good pin          | PG pin is high impedance, V <sub>OUT</sub> = 2 V, EN = V <sub>IN</sub> , I <sub>OUT</sub> = 0 mA; T <sub>J</sub> = −40°C to 85°C                           |                                |      |       | 20  | nA   |
| OUTPUT                         |                                           |                                                                                                                                                            |                                |      |       |     |      |
| I <sub>LIM_softstart</sub>     | Switch current limit during soft start    | Current limit is reduced during soft start, T <sub>J</sub> = −40°C to 85°C                                                                                 |                                | 40   | 110   | 180 | mA   |
| V <sub>VOUT</sub>              | Output voltage range                      | For TPS627450; output voltages are selected with pins VSEL1 - 4                                                                                            |                                | 1.8  |       | 3.3 | V    |
|                                |                                           | For TPS627451; output voltages are selected with pins VSEL1 - 4                                                                                            |                                | 1.3  |       | 2.8 |      |
|                                | Output voltage accuracy                   | PFM mode, I <sub>OUT</sub> = 0 mA, V <sub>OUT</sub> + 0.6 V ≤ V <sub>IN</sub> ≤ 10 V; min 3.3 V, whichever value is higher; T <sub>J</sub> = −40°C to 85°C |                                | -2.5 | 0     | 2.5 | %    |
|                                |                                           | PWM Mode, V <sub>OUT</sub> + 0.7 V ≤ V <sub>IN</sub> ≤ 10 V; min 3.3 V, whichever value is higher; T <sub>J</sub> = −40°C to 85°C                          |                                | −2   | 0     | 2   |      |
|                                | DC output voltage load regulation         | V <sub>OUT</sub> = 2.0 V; I <sub>OUT</sub> = 2 mA to 80 mA (PFM mode)                                                                                      |                                |      | 0.005 |     | %/mA |
|                                | DC output voltage load regulation         | V <sub>OUT</sub> = 2.0 V; I <sub>OUT</sub> = 150 mA to 300 mA (PWM mode)                                                                                   |                                |      | 0.001 |     | %/mA |
|                                | DC output voltage line regulation         | V <sub>OUT</sub> = 2.0 V, I <sub>OUT</sub> = 300 mA, 4 V ≤ V <sub>IN</sub> ≤ 10 V                                                                          |                                |      | 0.015 |     | %/V  |

(1) A 50-M $\Omega$  (typical) internal resistor divider is internally connected to the VOUT pin


## 7.6 Timing Characteristics

 $V_{IN} = 6\text{ V}$ ,  $T_J = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  typical values are at  $T_J = 25^{\circ}\text{C}$  (unless otherwise noted)


| PARAMETER                            |                                                  | TEST CONDITIONS                                                                                                                             | MIN | TYP | MAX | UNIT          |
|--------------------------------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| <b>SUPPLY</b>                        |                                                  |                                                                                                                                             |     |     |     |               |
| $t_{\text{delay}}$                   | UVLO delay time                                  | response time of UVLO circuit                                                                                                               |     | 200 |     | $\mu\text{s}$ |
| <b>INPUT VOLTAGE SWITCH (VIN_SW)</b> |                                                  |                                                                                                                                             |     |     |     |               |
| $t_{\text{VIN\_SW}}$                 | VIN-switch turn-on settling time                 | Time from EN_VIN_SW = High until $R_{\text{DS(ON)}}$ is within specification                                                                |     | 100 |     | $\mu\text{s}$ |
| <b>POWER GOOD OUTPUT (PG)</b>        |                                                  |                                                                                                                                             |     |     |     |               |
| $t_{\text{delay}}$                   | PGOOD delay time                                 | Response time of PGOOD circuit; falling edge                                                                                                |     | 200 |     | $\mu\text{s}$ |
| <b>OUTPUT</b>                        |                                                  |                                                                                                                                             |     |     |     |               |
| $t_{\text{ONmin}}$                   | Minimum ON time                                  | $V_{IN} = 6\text{ V}$ , $V_{\text{OUT}} = 2.0\text{ V}$ , $I_{\text{OUT}} = 0\text{ mA}$                                                    |     | 256 |     | ns            |
| $t_{\text{OFFmin}}$                  | Minimum OFF time                                 | $V_{IN} = 3.3\text{ V}$                                                                                                                     |     | 50  |     | ns            |
| $t_{\text{Start}}$                   | Regulator start up time                          | $V_{IN} = 6\text{ V}$ , from transition EN = Low to High until device starts switching, $T_J = -40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ |     | 15  | 50  | ms            |
| $t_{\text{Softstart}}$               | Softstart time with reduced switch current limit | $3.3\text{ V} \leq V_{IN} \leq 10\text{ V}$ , $\text{EN} = V_{IN}$                                                                          |     | 700 |     | $\mu\text{s}$ |




## 7.7 Typical Characteristics

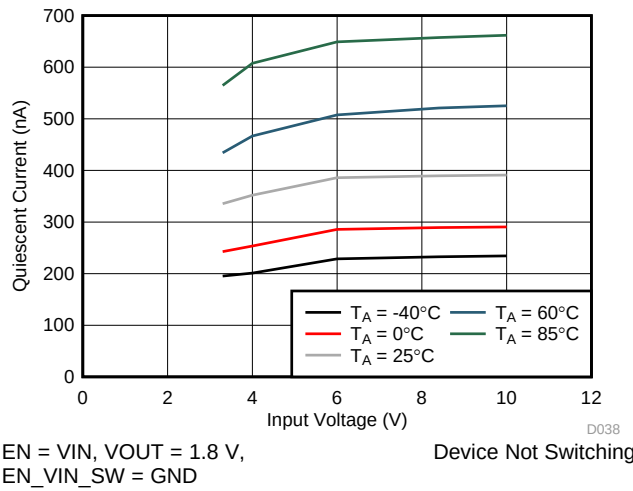


**Figure 1. Quiescent Current**

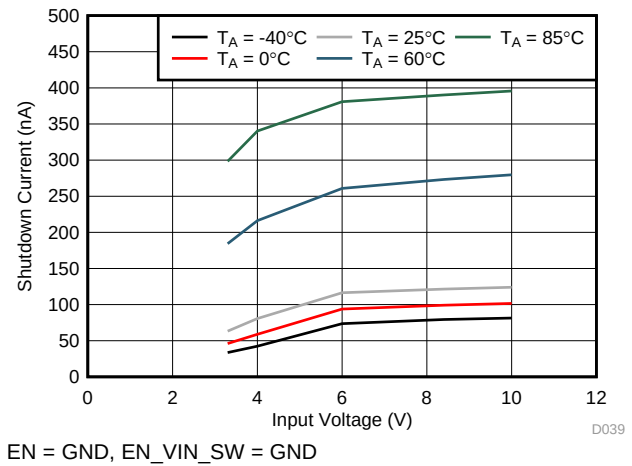

**Figure 2. Shutdown Current**

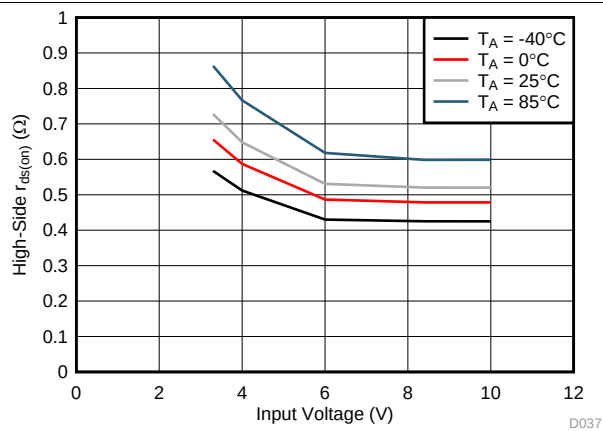

**Figure 3.  $R_{DS(ON)}$  High-Side MOSFET**

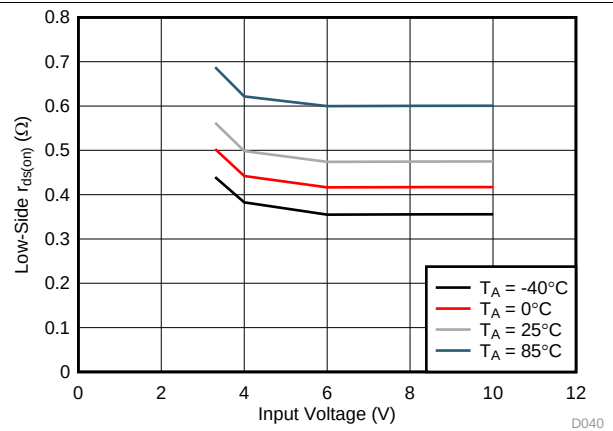


**Figure 4.  $R_{DS(ON)}$  Low-Side MOSFET**

## 8 Detailed Description

### 8.1 Overview

The TPS62745 is the first dual-cell, ultra low power step down converter combining TI's DCS-Control™ topology and ultra low quiescent current consumption (400 nA typical) while maintaining a regulated output voltage. The device extends high efficiency operation to output currents down to a few micro amperes.

### 8.2 Functional Block Diagram

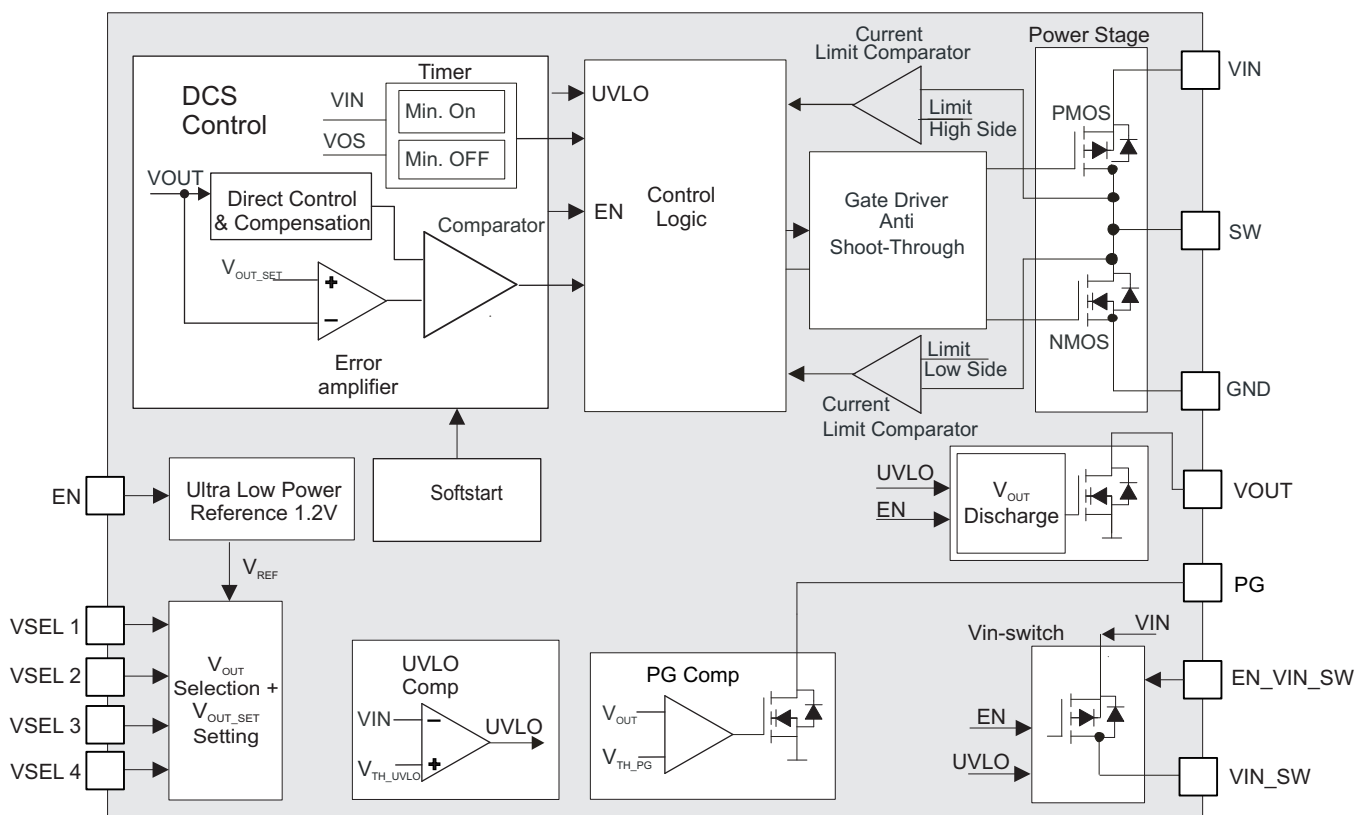

### 8.3 Feature Description

#### 8.3.1 DCS-Control™

TI's DCS-Control™ (Direct Control with Seamless Transition into Power Save Mode) is an advanced regulation topology, which combines the advantages of hysteretic and voltage mode control. Characteristics of DCS - Control™ are excellent AC load regulation and transient response, low output ripple voltage and a seamless transition between pulse frequency modulation (PFM) and pulse width modulation (PWM) mode operation. DCS-Control™ includes an AC loop which senses the output voltage ( $V_{OUT}$  pin) and directly feeds the information to a fast comparator stage. This comparator sets the switching frequency, which is constant for steady state operating conditions, and provides immediate response to dynamic load changes. In order to achieve accurate DC load regulation, a voltage feedback loop is used. The internally compensated regulation network achieves fast and stable operation with small external components and low ESR capacitors. The DCS-Control™ topology supports PWM mode for medium and high load conditions and a power save mode at light loads. During PWM mode, it operates in continuous conduction. The switching frequency is up to 2.5 MHz with a controlled frequency variation depending on the input voltage. If the load current decreases, the converter seamlessly enters power save mode to maintain high efficiency down to very light loads. In power save mode the switching frequency varies linearly with the load current. Since DCS-Control™ supports both operation modes within one single building block, the transition from PWM to power save mode is seamless without effects on the output voltage. The TPS62745 offers both excellent DC voltage and superior load transient regulation, combined with very low

## Feature Description (continued)

output voltage ripple, minimizing interference with RF circuits. At high load currents the converter operates in quasi fixed frequency PWM mode operation and at light loads in PFM mode to maintain highest efficiency over the full load current range. In PFM mode, the device generates a single switching pulse to ramp up the inductor current and recharge the output capacitor, followed by a sleep period where most of the internal circuits are shutdown to achieve a quiescent current of typically 400-nA. During this time, the load current is supported by the output capacitor. The duration of the sleep period depends on the load current and the inductor peak current.

### 8.3.2 Enable / Shutdown

The DC/DC converter is activated when EN pin is set to High. For proper operation, the pin must be terminated and must not be left floating. With EN pin set to Low, the device enters shutdown mode with typical 130 nA current consumption.

### 8.3.3 Power Good Output (PG)

The power good comparator features an open drain output. The PG comparator is active with EN pin set to high and  $V_{IN}$  above the threshold  $V_{TH\_UVLO+}$ . It is driven to high impedance once  $V_{OUT}$  trips the threshold  $V_{TH\_PG+}$  for rising  $V_{OUT}$ . The output is pulled to low level once  $V_{OUT}$  falls below the threshold  $V_{TH\_PG-}$ . The output is as well pulled to low level in case the input voltage  $V_{IN}$  falls below the undervoltage lockout threshold  $V_{TH\_UVLO-}$  or the device is disabled with EN = Low. With EN = High, the output is driven to high impedance state, once the load current falls below ~1 mA. In this case the PG comparator is turned off to achieve lowest quiescent current. PG will be triggered when a output voltage change is ongoing due to a change in VSEL pin levels if the new target is high enough to trigger the PG threshold.

### 8.3.4 Output Voltage Selection (VSEL1 - 4)

The TPS62745 does not require an external resistor divider network to program the output voltage. The device integrates a high impedance (typical 50 M $\Omega$ ) feedback resistor divider network which is programmed by the pins VSEL1-4. TPS62745 supports an output voltage range of 1.8 V to 3.3 V in 100-mV steps while the TPS627451 supports an output voltage range of 1.3 V to 2.8 V. The output voltage can be changed during operation and supports simple dynamic output voltage scaling; see the [Application and Implementation](#) section for further details. The output voltage is programmed according to [Table 1](#) for TPS62745 and [Table 2](#) for TPS627451.

### 8.3.5 Input Voltage Switch

There is an internal switch that connects the input voltage applied at pin VIN to the VIN\_SW output. The switch can be used to connect an external voltage divider for an ADC monitoring to the input voltage. An enable pin EN\_VIN\_SW turns the switch on and off, making sure there is no current through that external voltage divider when not needed. A logic high level on EN\_VIN\_SW turns the switch on once the input voltage is above the undervoltage lockout threshold and the device is enabled. The switch can be used for other purposes as long as the current rating of 5 mA and its turn-on resistance is observed. An external voltage divider should be in a range of 10 k $\Omega$  to 100 k $\Omega$ . Larger values than 100 k $\Omega$  can be used as long as the input resistance and capacitance of the external circuit (e.g. ADC input) is observed.

## 8.4 Device Functional Modes

### 8.4.1 Soft Start

When the device is enabled, the internal reference is powered up and after the startup delay time  $t_{\text{Startup\_delay}}$  has expired, the device enters soft start, starts switching and ramps up the output voltage. During soft start the device operates with a reduced current limit,  $I_{\text{LIM\_softstart}}$ , of typical 1/5 of the nominal current limit. This reduced current limit is active during the soft start time  $t_{\text{Softstart}}$ . The current limit is increased to its nominal value,  $I_{\text{LIMF}}$ , once the soft start time has expired or the power good comparator detects that the output voltage reached its target value.

### 8.5 VOUT Discharge

The VOUT pin has a discharge circuit to connect the rail to GND, once it is disabled. This feature prevents residual charge voltages on the output capacitor, which may impact proper power up of the systems connected to the converter. With the EN pin pulled to low, the discharge circuit at the VOUT pin becomes active. The discharge circuit on VOUT is also associated with the UVLO comparator. The discharge circuit becomes active once the UVLO comparator triggers and the input voltage  $V_{\text{IN}}$  has dropped below the UVLO comparator threshold  $V_{\text{TH\_UVLO}}$  (typical 2.9 V).

### 8.6 Internal Current Limit


The TPS62745 integrates a current limit on the high side, as well on the low side MOSFETs to protect the device against overload or short circuit conditions. The peak current in the switches is monitored cycle by cycle. If the high side MOSFET current limit is reached, the high side MOSFET is turned off and the low side MOSFET is turned on until the current decreases below the low side MOSFET current limit.

## 9 Application and Implementation

### 9.1 Application Information

The TPS62745 devices are a step down converter family featuring typical 400-nA quiescent current and operating with a tiny 4.7- $\mu$ H inductor and a 10- $\mu$ F output capacitor. These DCS-Control™ based devices extend the light load efficiency range below 10- $\mu$ A load currents. TPS62745 supports output currents up to 300 mA,

### 9.2 Typical Application

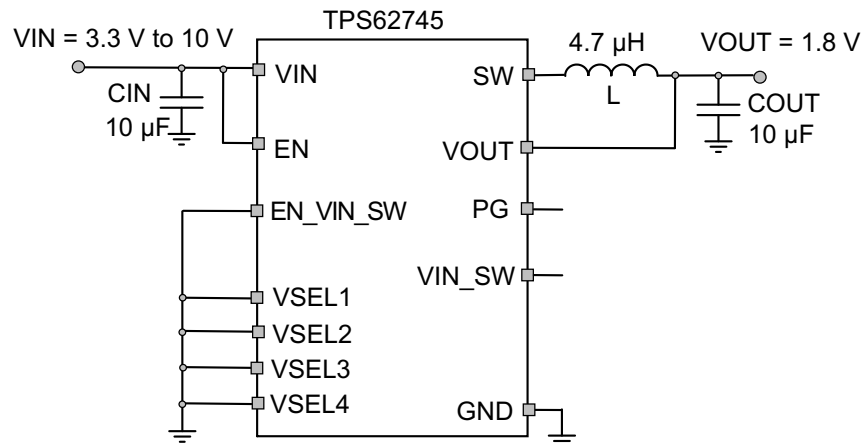

**Figure 5. TPS62745 Typical Application**

#### 9.2.1 Design Requirements

The TPS62745 is a highly integrated DC/DC converter. The output voltage is set via the VSEL pin interface without any additional external components. For proper operation only an input and output capacitor and an inductor is required. When the input voltage switch is not used, its enable input should be tied to GND. The output VIN\_SW can either be left open or tied to GND. [Table 3](#) shows the components used for the application characteristic curves.

**Table 3. List of Components**

| REFERENCE | DESCRIPTION      | Value                          | MANUFACTURER <sup>(1)</sup> |
|-----------|------------------|--------------------------------|-----------------------------|
| IC        | TPS62745         |                                | Texas Instruments           |
| L         | DfE252010        | 4.7 $\mu$ H                    | Toko                        |
| CIN       | TMK212BBJ106MG   | 10 $\mu$ F / 25 V / X5R / 0805 | Taiyo Yuden                 |
| COUT      | LMK212ABJ106KG-T | 10 $\mu$ F / 10 V / X5R / 0805 | Taiyo Yuden                 |

(1) See [Third-Party Products Disclaimer](#)

#### 9.2.2 Detailed Design Procedure

##### 9.2.2.1 Output Voltage Selection (VSEL1 - 4)

The VSEL pins select the output voltage of the converters. See the [Output Voltage Selection \(VSEL1 - 4\)](#) of the Feature Descriptions. The output voltage can be changed during operation by changing the logic level of these pins. The output voltage of the TPS62745 ramps to the new target with a slew rate as defined in the electrical characteristics. Typically these pins are driven by an applications processor with an I/O voltage of either 1.8 V or 3.3 V or hard wired to a logic high or logic low signal. In case the pins are not driven from an applications processor and the supply voltage is higher than the voltage rating of the VSEL pins, a logic high level can be taken from the output voltage at pin VOUT. During start-up, when the output is rising from 0 V to its target, the VSEL pins connected to VOUT will change their logic level from low to high. TPS62745 is designed such that such a configuration ensures a steadily rising output voltage.

### 9.2.2.2 Output Filter Design (Inductor and Output Capacitor)

The external components have to fulfill the needs of the application, but also the stability criteria of the devices control loop. The TPS62745 is optimized to work within a range of L and C combinations. The LC output filter inductance and capacitance have to be considered together, creating a double pole, responsible for the corner frequency of the converter. [Table 4](#) can be used to simplify the output filter component selection.

**Table 4. Recommended LC Output Filter Combinations**

| Inductor Value [μH] <sup>(1)</sup> | Output Capacitor Value [μF] <sup>(2)</sup> |       |
|------------------------------------|--------------------------------------------|-------|
|                                    | 10 μF                                      | 22 μF |
| 4.7                                | √ <sup>(3)</sup>                           | √     |
| 3.3                                | √                                          | √     |

- (1) Inductor tolerance and current derating is anticipated. The effective inductance can vary by 20% and -30%.
- (2) Capacitance tolerance and bias voltage derating is anticipated. The effective capacitance can vary by 20% and -50%.
- (3) This LC combination is the standard value and recommended for most applications.

### 9.2.2.3 Inductor Selection

The inductor value affects its peak-to-peak ripple current, the PWM-to-PFM transition point, the output voltage ripple and the efficiency. The selected inductor has to be rated for its DC resistance and saturation current. The inductor ripple current ( $\Delta I_L$ ) decreases with higher inductance and increases with higher  $V_{IN}$  or  $V_{OUT}$  and can be estimated according to [Equation 1](#).

[Equation 2](#) calculates the maximum inductor current under static load conditions. The saturation current of the inductor should be rated higher than the maximum inductor current as calculated with [Equation 2](#). This is recommended because during heavy load transient the inductor current will rise above the calculated value. A more conservative way is to select the inductor saturation current according to the high-side MOSFET switch current limit  $I_{LIMF}$ .

$$\Delta I_L = V_{out} \times \frac{1 - \frac{V_{out}}{V_{in}}}{L \times f} \quad (1)$$

$$I_{Lmax} = I_{outmax} + \frac{\Delta I_L}{2}$$

where:

- $f$  = Switching frequency
  - $L$  = Inductor value
  - $\Delta I_L$  = Peak-to-peak inductor ripple current
  - $I_{Lmax}$  = Maximum inductor current
- (2)

In DC/DC converter applications, the efficiency is essentially affected by the inductor AC resistance (i.e. quality factor) and by the inductor DCR value. To achieve high efficiency operation, care should be taken in selecting inductors featuring a quality factor above 25 at the switching frequency. Increasing the inductor value produces lower RMS currents, but degrades transient response. For a given physical inductor size, increased inductance usually results in an inductor with lower saturation current.

The total losses of the coil consist of both the losses in the DC resistance ( $R_{DC}$ ) and the following frequency-dependent components:

- The losses in the core material (magnetic hysteresis loss, especially at high switching frequencies)
- Additional losses in the conductor from the skin effect (current displacement at high frequencies)
- Magnetic field losses of the neighboring windings (proximity effect)
- Radiation losses

The following inductor series from different suppliers have been used:

**Table 5. List of Inductors**

| INDUCTANCE<br>[μH] | DCR [Ω], typical | DIMENSIONS<br>[mm <sup>3</sup> ] | INDUCTOR<br>TYPE | SUPPLIER <sup>(1)</sup> |
|--------------------|------------------|----------------------------------|------------------|-------------------------|
| 4.7                | 0.250            | 2.5 x 2.0 x 1.0                  | DFE252010        | TOKO                    |
| 3.3                | 0.190            | 2.5 x 2.0 x 1.0                  | DFE252010        | TOKO                    |
| 4.7                | 0.336            | 2.0 x 1.9 x 1.0                  | XPL2010          | Coilcraft               |
| 3.3                | 0.207            | 2.0 x 1.9 x 1.0                  | XPL2010          | Coilcraft               |
| 4.7                | 0.217            | 3.0 x 3.0 x 1.1                  | XFL3010          | Coilcraft               |
| 4.7                | 0.270            | 4.5 x 3.2 x 3.2                  | CC453232         | Bourns                  |

(1) See [Third-Party Products Disclaimer](#)

#### 9.2.2.4 DC/DC Output Capacitor Selection

The DCS-Control™ scheme of the TPS62745 allows the use of tiny ceramic capacitors. Ceramic capacitors with low ESR values have the lowest output voltage ripple and are recommended. The output capacitor requires either an X7R or X5R dielectric. Y5V and Z5U dielectric capacitors, aside from their wide variation in capacitance over temperature, become resistive at high frequencies. At light load currents, the converter operates in power save mode and the output voltage ripple is dependent on the output capacitor value and the PFM peak inductor current. A larger output capacitor can be used, but it should be considered that larger output capacitors lead to an increased leakage current in the capacitor and may reduce overall conversion efficiency. Furthermore, larger output capacitors impact the start up behavior of the DC/DC converter. Furthermore, the control loop of the TPS62745 requires a certain voltage ripple across the output capacitor. Super-capacitors can be used in parallel to the ceramic capacitors when it is made sure that the super-capacitors series resistance is large enough to provide a valid feedback signal to the error amplifier which is in phase with the inductor current. Applications using an output capacitance above of what is stated under [Recommended Operating Conditions](#) should be checked for stability over the desired operating conditions range.

#### 9.2.2.5 Input Capacitor Selection

Because of the nature of the buck converter having a pulsating input current, a low ESR input capacitor is required for best input voltage filtering to ensure proper function of the device and to minimize input voltage spikes. For most applications a 10 μF or 4.7 μF ceramic capacitor is recommended. The input capacitor can be increased without any limit for better input voltage filtering.

[Table 6](#) shows a list of tested input/output capacitors.

**Table 6. List of Input and Output Capacitors**

| CAPACITANCE [μF] | SIZE | CAPACITOR TYPE    | SUPPLIER <sup>(1)</sup> |
|------------------|------|-------------------|-------------------------|
| 10               | 0603 | GRM188R61C106MA73 | Murata                  |
| 10               | 0603 | EMK107BBJ106MA    | Taiyo Yuden             |
| 4.7              | 0805 | EMK212ABJ475KG    | Taiyo Yuden             |
| 10               | 0805 | TMK212BBJ106MG    | Taiyo Yuden             |
| 10               | 0805 | LMK212ABJ106KG-T  | Taiyo Yuden             |

(1) See [Third-Party Products Disclaimer](#)

## 9.2.3 Application Curves

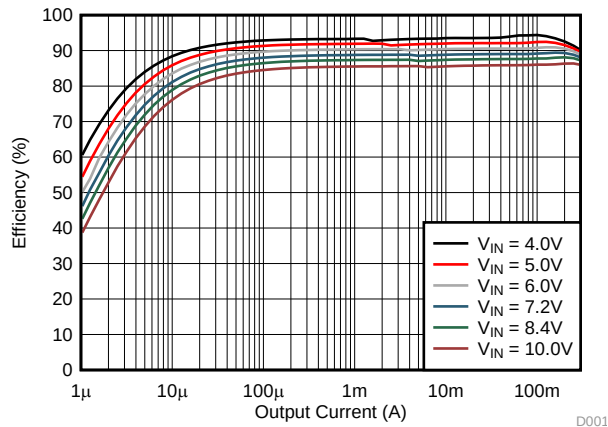


Figure 6.  $V_{OUT} = 3.3\text{ V}$

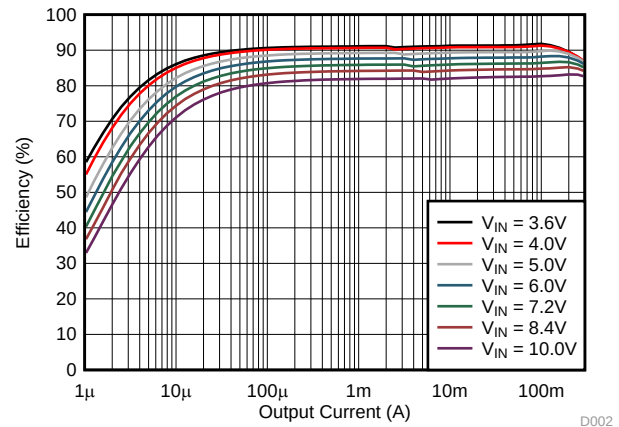


Figure 7.  $V_{OUT} = 2.5\text{ V}$

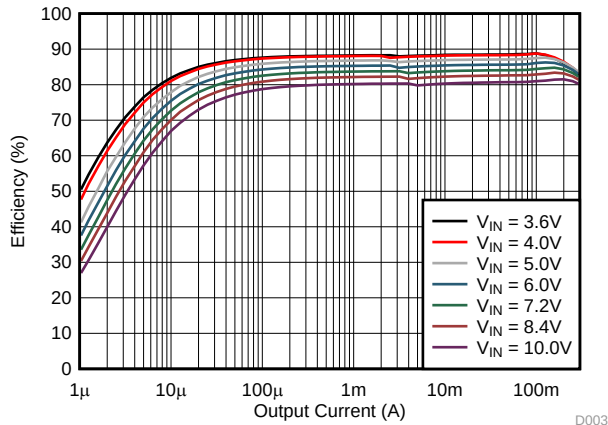


Figure 8.  $V_{OUT} = 1.8\text{ V}$

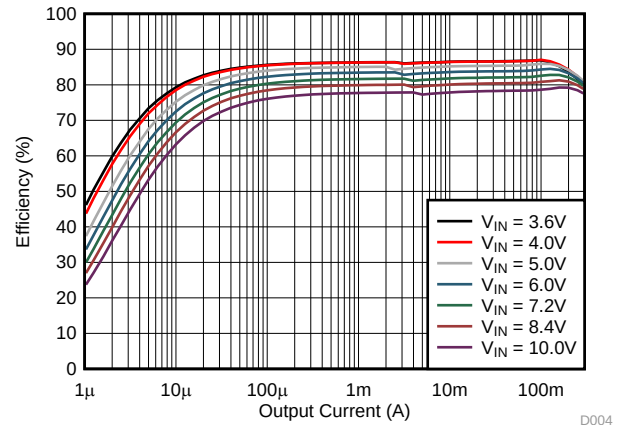


Figure 9.  $V_{OUT} = 1.5\text{ V}$

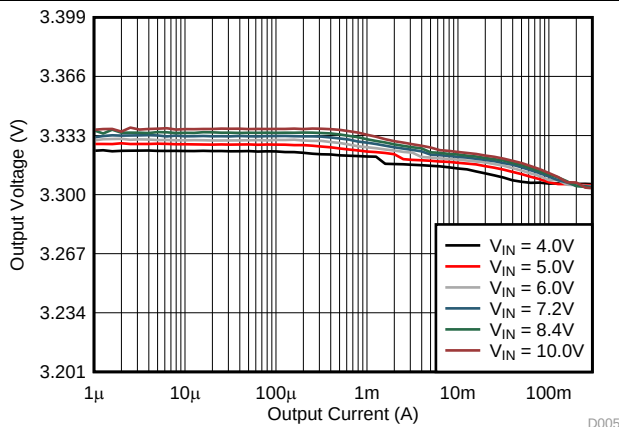


Figure 10.  $V_{OUT} = 3.3\text{ V}$



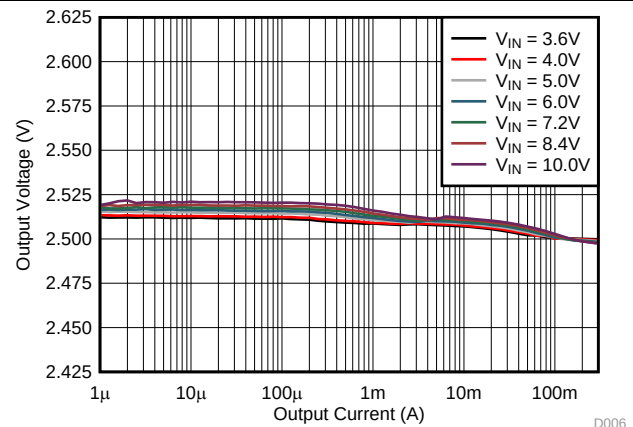


Figure 11.  $V_{OUT} = 2.5\text{ V}$




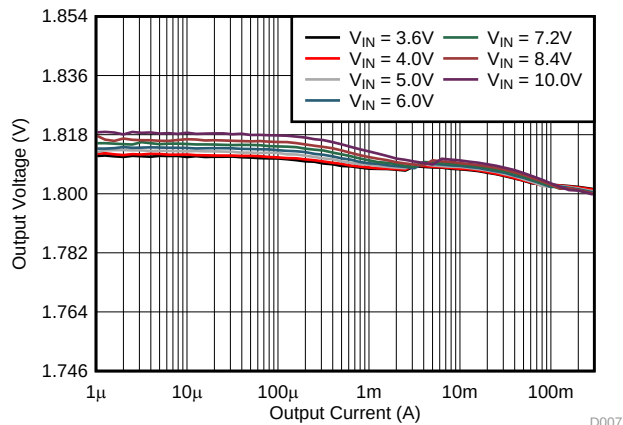


**Figure 12.  $V_{OUT} = 1.8\text{ V}$**

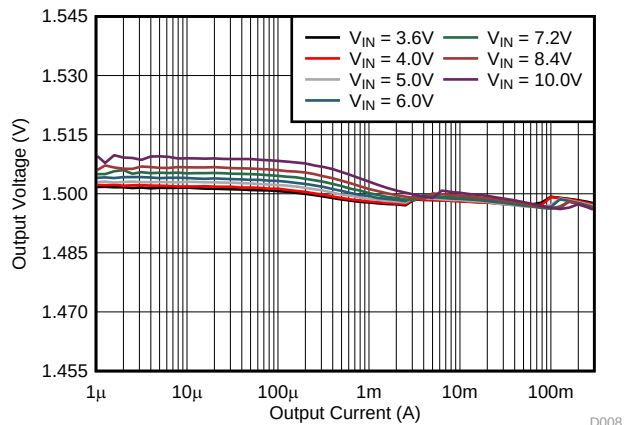


**Figure 13.  $V_{OUT} = 1.5\text{ V}$**

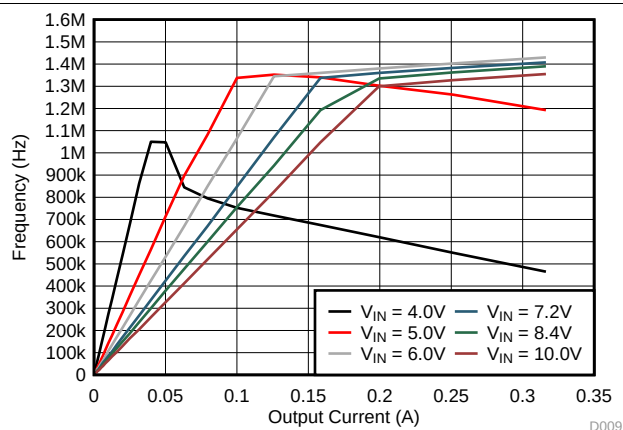


**Figure 14.  $V_{OUT} = 3.3\text{ V}$**

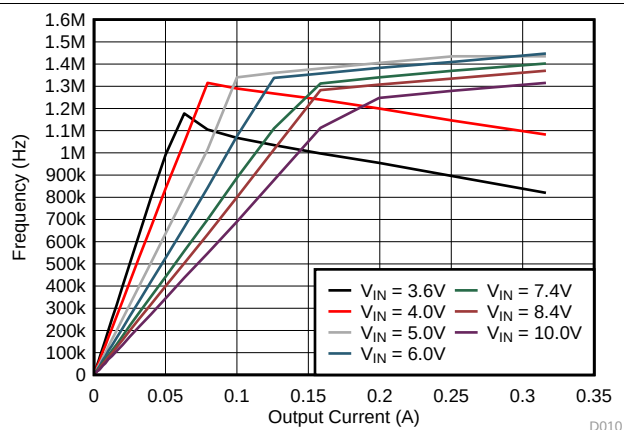

**Figure 15.  $V_{OUT} = 2.5\text{ V}$**

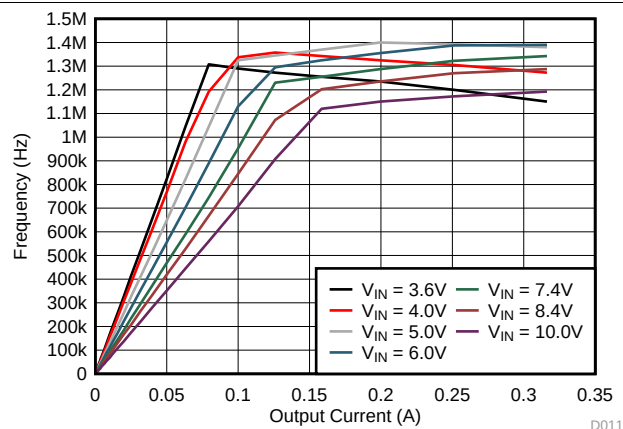

**Figure 16.  $V_{OUT} = 1.8\text{ V}$**

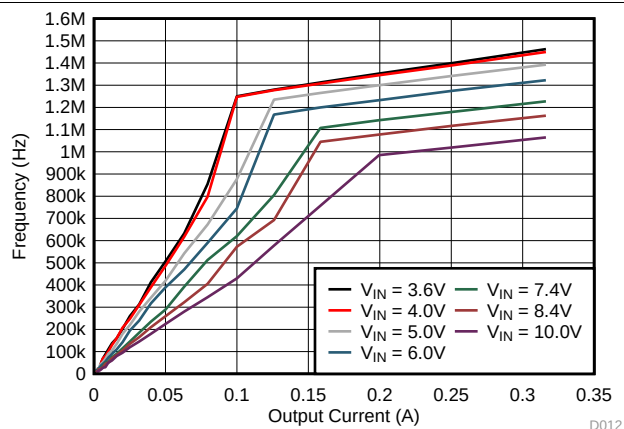

**Figure 17.  $V_{OUT} = 1.5\text{ V}$**

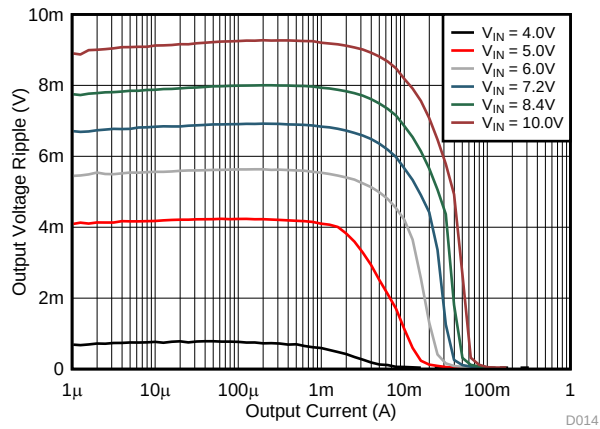


Figure 18.  $V_{OUT} = 3.3\text{ V}$

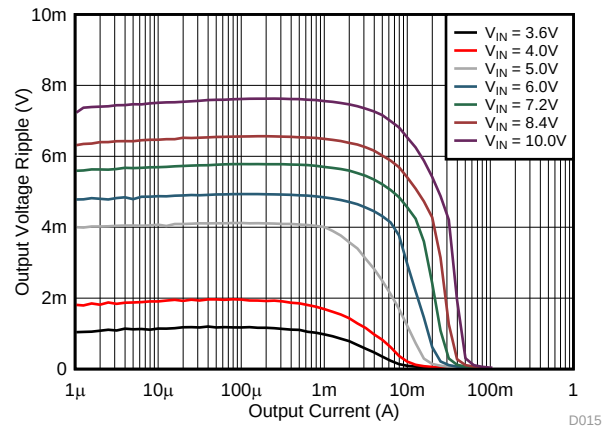


Figure 19.  $V_{OUT} = 2.5\text{ V}$

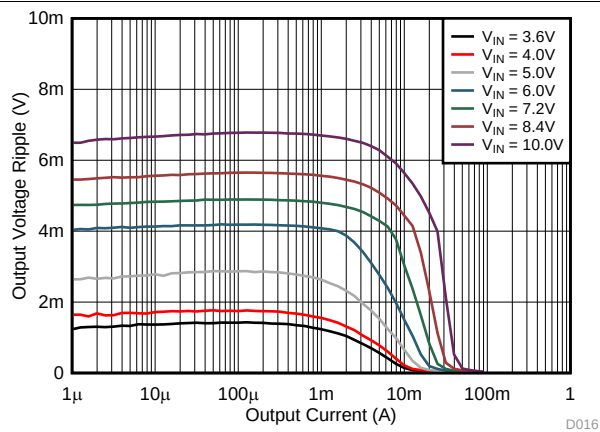


Figure 20.  $V_{OUT} = 1.8\text{ V}$

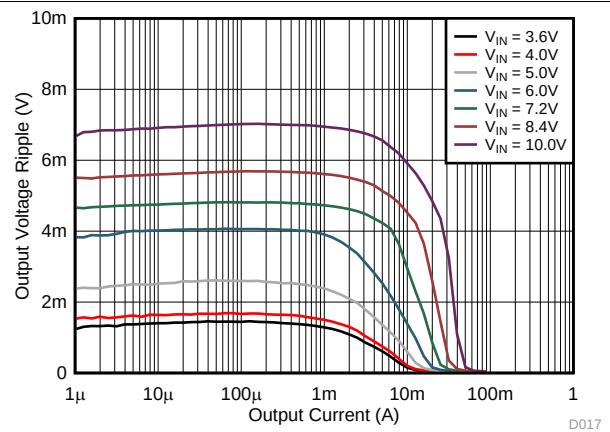


Figure 21.  $V_{OUT} = 1.5\text{ V}$

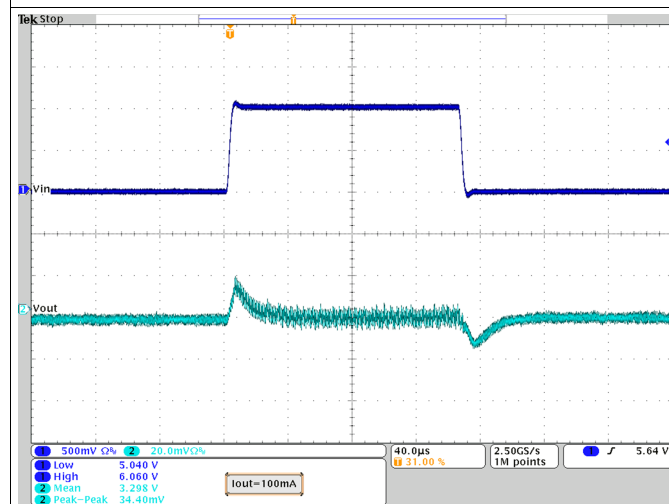


Figure 22. Line Transient Response;  $V_{OUT} = 3.3\text{ V}$

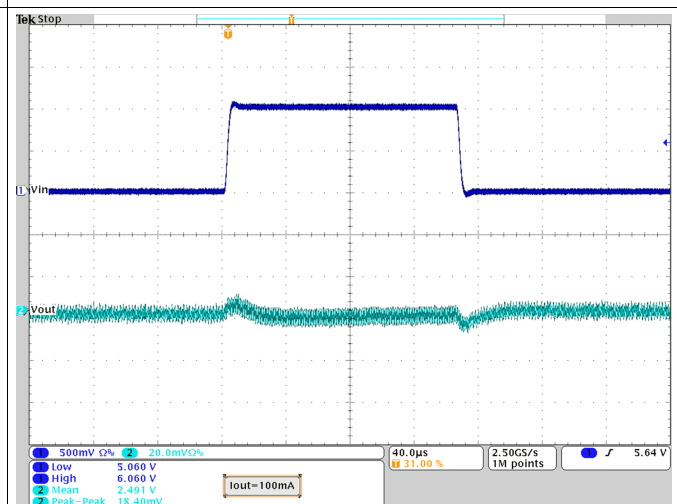


Figure 23. Line Transient Response;  $V_{OUT} = 2.5\text{ V}$

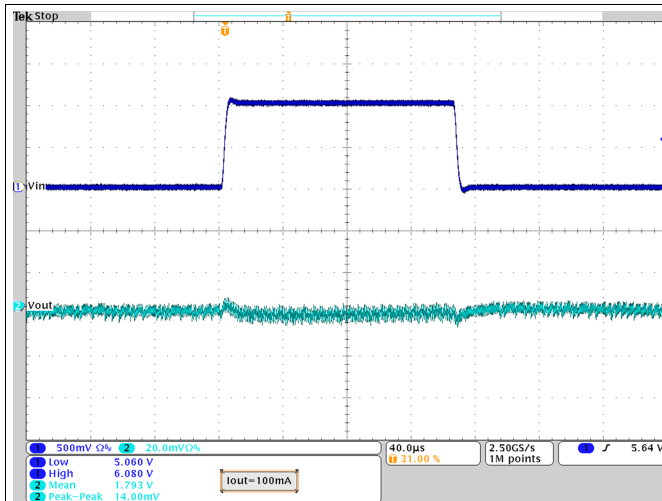


Figure 24. Line Transient Response;  $V_{OUT} = 1.8\text{ V}$

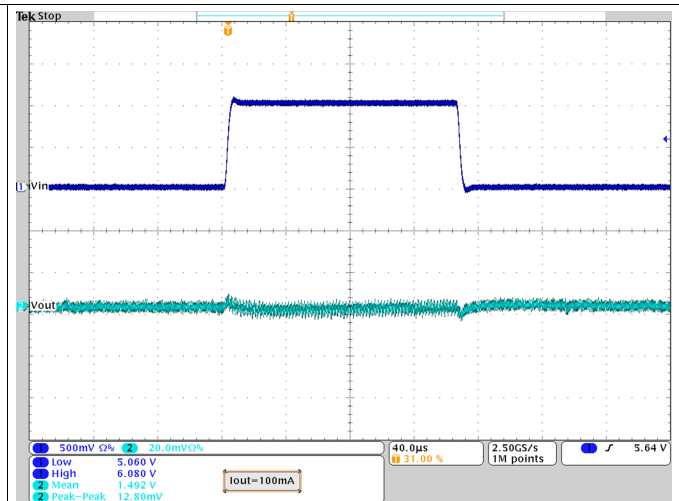


Figure 25. Line Transient Response;  $V_{OUT} = 1.5\text{ V}$

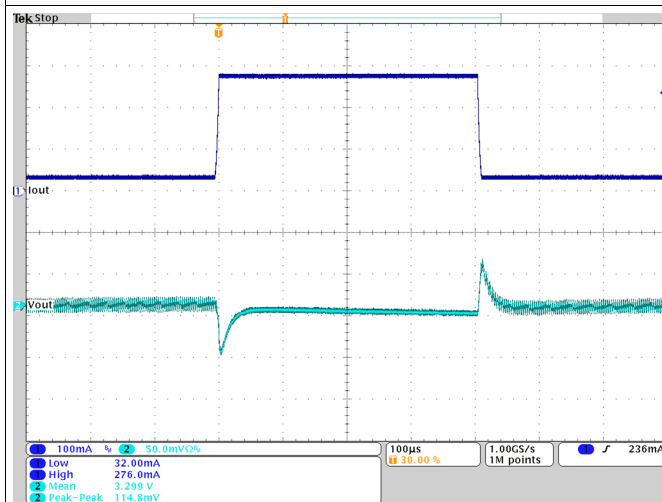


Figure 26. Load Transient Response;  $V_{OUT} = 3.3\text{ V}$

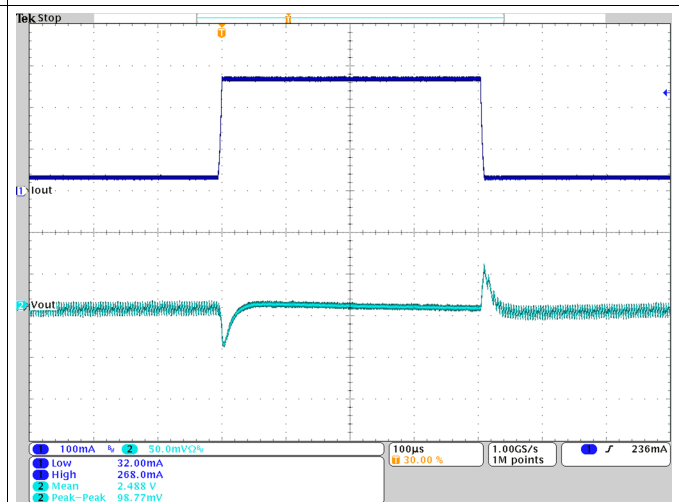


Figure 27. Load Transient Response;  $V_{OUT} = 2.5\text{ V}$

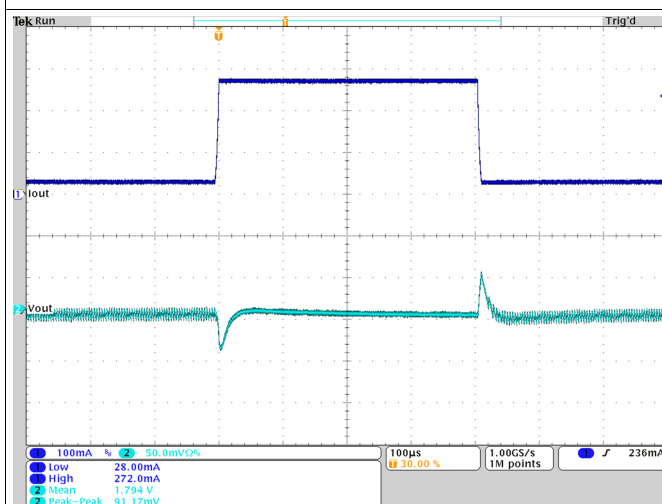


Figure 28. Load Transient Response;  $V_{OUT} = 1.8\text{ V}$

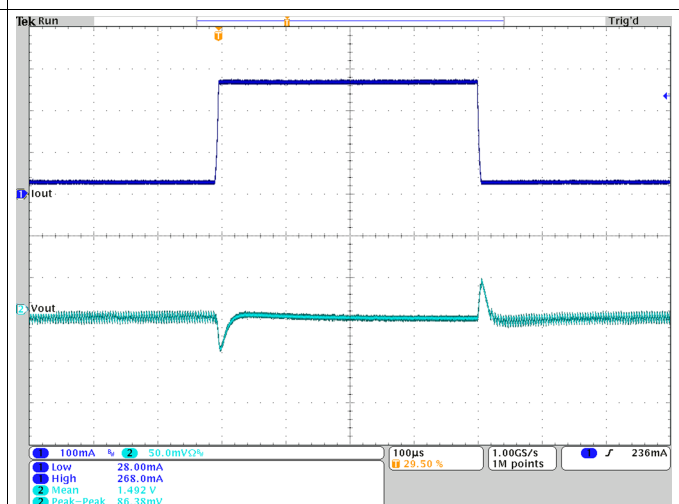


Figure 29. Load Transient Response;  $V_{OUT} = 1.5\text{ V}$

# TPS62745, TPS627451

SLVSC68A –JUNE 2015–REVISED JUNE 2015

www.ti.com

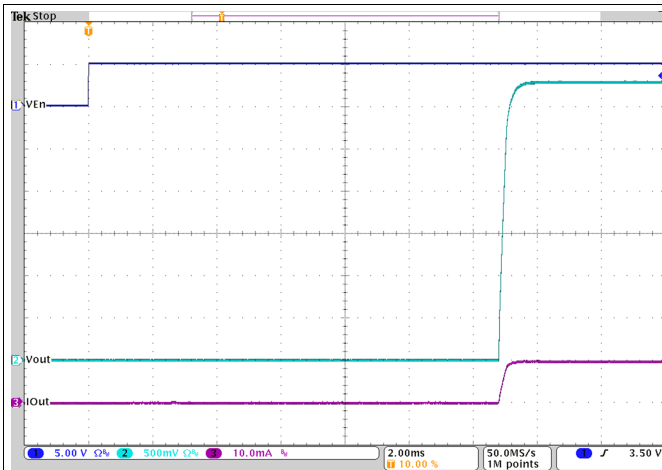


Figure 30. Startup with  $V_{OUT} = 3.3\text{ V}$

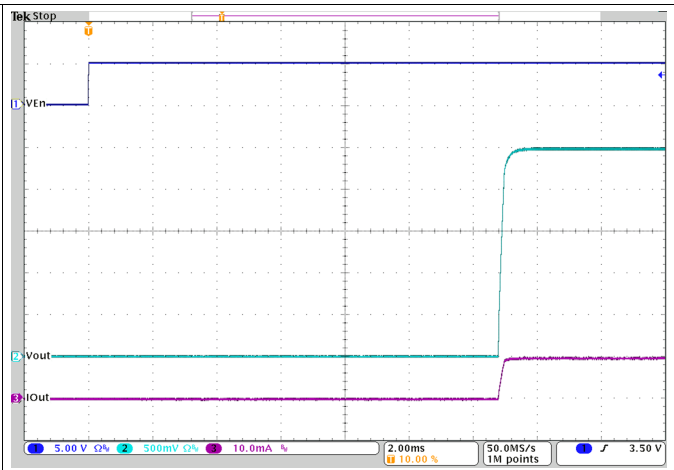


Figure 31. Startup with  $V_{OUT} = 2.5\text{ V}$

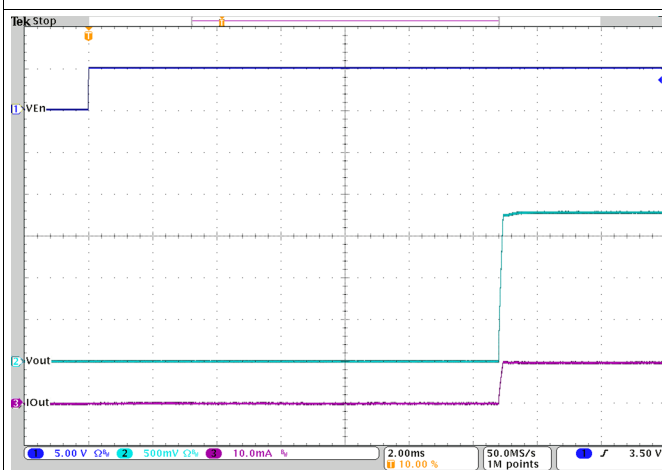


Figure 32. Startup with  $V_{OUT} = 1.8\text{ V}$


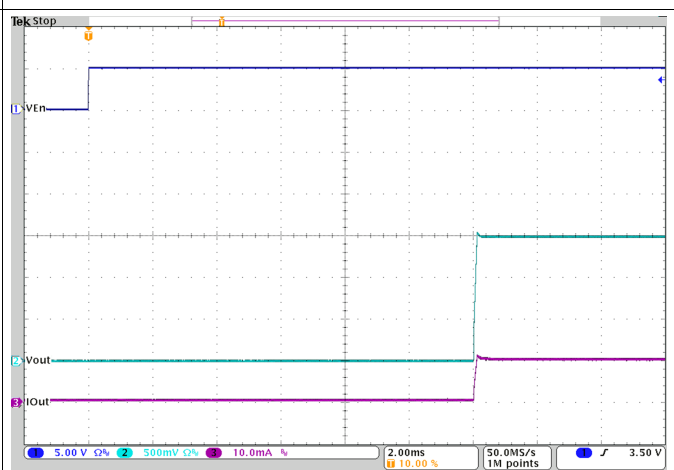


Figure 33. Startup with  $V_{OUT} = 1.5\text{ V}$

## 9.3 System Examples

### 9.3.1 TPS62745 Set to a Fixed Voltage of 3.3 V

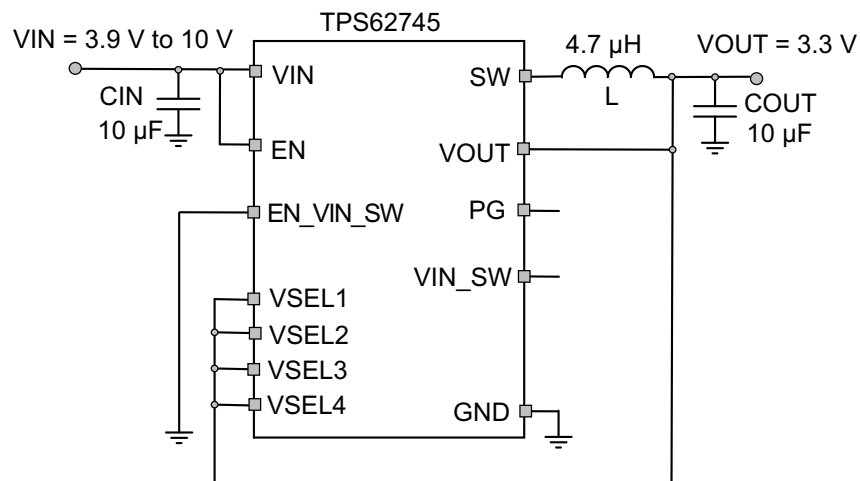

**Figure 34. TPS62745 Typical Application for Vout = 3.3 V**

#### 9.3.1.1 Design Requirements

The minimum input voltage needs to be at least 700 mV above the desired output voltage for full output current.

**Table 7. List of Components**



| REFERENCE | DESCRIPTION      | Value                     | MANUFACTURER <sup>(1)</sup> |
|-----------|------------------|---------------------------|-----------------------------|
| IC        | TPS62745         |                           | Texas Instruments           |
| L         | DFE252010        | 4.7 µH                    | Toko                        |
| CIN       | TMK212BBJ106MG   | 10 µF / 25 V / X5R / 0805 | Taiyo Yuden                 |
| COUT      | LMK212ABJ106KG-T | 10 µF / 10 V / X5R / 0805 | Taiyo Yuden                 |

(1) See [Third-Party Products Disclaimer](#)

### 9.3.1.2 Detailed Design Procedure


The logic level of the VSEL pins sets the output voltage. The maximum high level does not allow a direct connection to the supply voltage if it is above 6 V. The output voltage can be used instead to provide a logic high level.

### 9.3.1.3 Application Curves

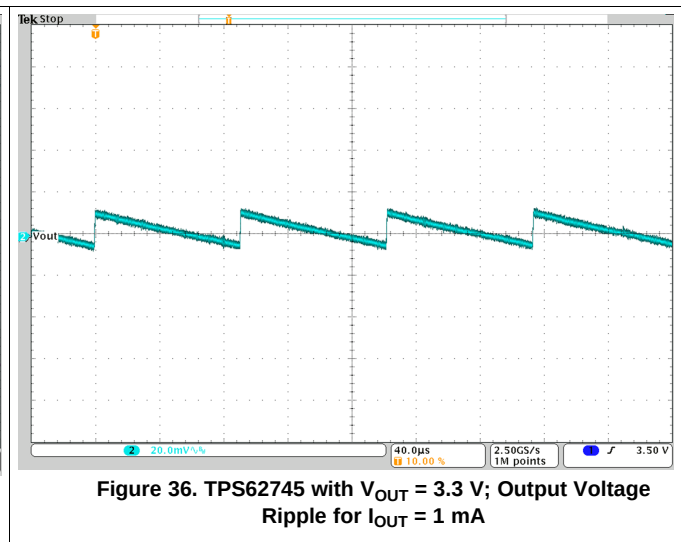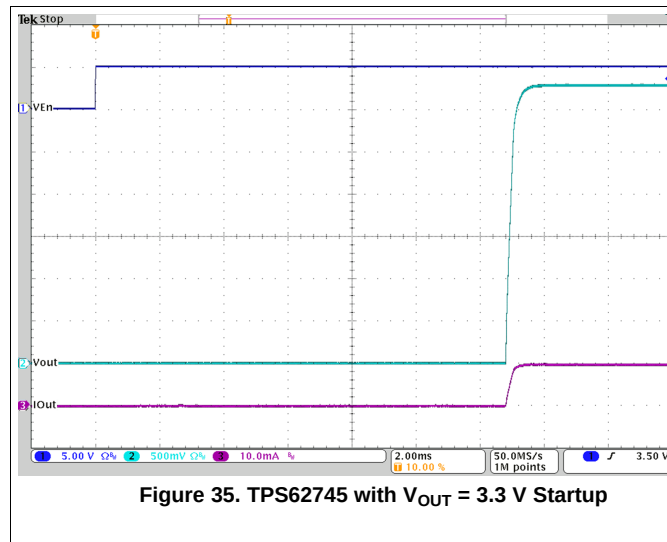

### 9.3.2 Dynamic Voltage Change on TPS62745

TPS62745 allows to change its output voltage during operation by changing the logic level of the VSEL pins.

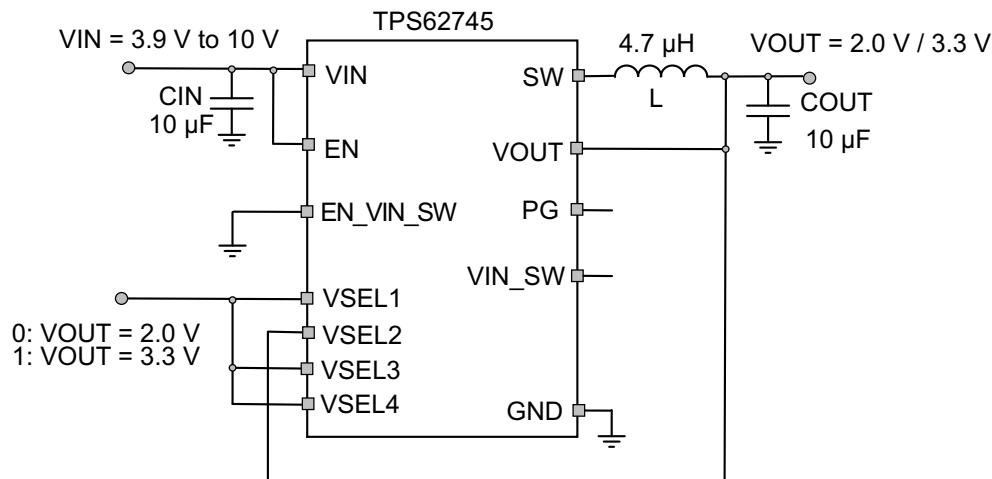

**Figure 37. TPS62745 Typical Application for Switching Between Two Output Voltages**

#### 9.3.2.1 Design Requirements

The minimum input voltage needs to be at least 700 mV above the maximum output voltage for full output current. For an input voltage above 6V, the VSELx pins have to be tied to the output for a logic high level as their voltage rating is 6V.

**Table 8. List of Components**

| REFERENCE | DESCRIPTION      | Value                     | MANUFACTURER <sup>(1)</sup> |
|-----------|------------------|---------------------------|-----------------------------|
| IC        | TPS62745         |                           | Texas Instruments           |
| L         | DFE252010        | 4.7 µH                    | Toko                        |
| CIN       | TMK212BBJ106MG   | 10 µF / 25 V / X5R / 0805 | Taiyo Yuden                 |
| COU       | LMK212ABJ106KG-T | 10 µF / 10 V / X5R / 0805 | Taiyo Yuden                 |

(1) See [Third-Party Products Disclaimer](#)

### 9.3.2.2 Detailed Design Procedure

Toggle the logic level at VSEL1, VSEL3 and VSEL4 to change the output voltage from 2.0 V to 3.3 V and vice versa. The slope from higher output voltage to the lower output voltage is determined by the load current and output capacitance because the discharge of the output capacitor is through the load current only.

### 9.3.2.3 Application Curves

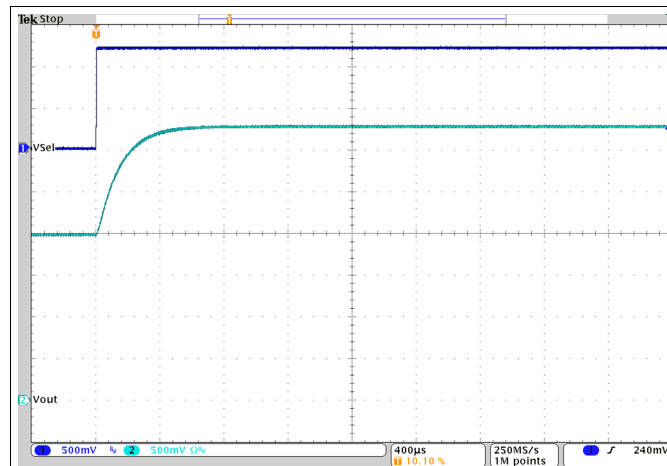


Figure 38. TPS62745 Output Voltage Change from 2.0 V to 3.3 V for  $I_{OUT} = 10$  mA

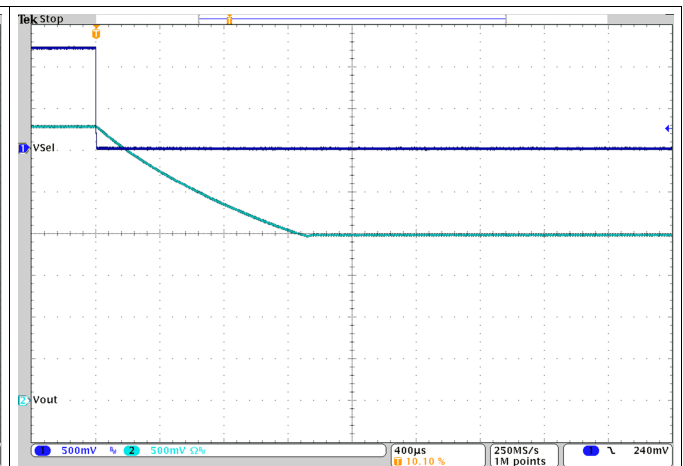


Figure 39. TPS62745 Output Voltage Change from 3.3 V to 2.0 V for  $I_{OUT} = 10$  mA



## 10 Power Supply Recommendations


The power supply to the TPS62745 needs to have a current rating according to the supply voltage, output voltage and output current of the TPS62745 shown in the [Specifications](#) section.

## 11 Layout

### 11.1 Layout Guidelines

As for all switching power supplies, the layout is an important step in the design. Especially RF designs demand careful attention to the PCB layout. Care must be taken in board layout to get the specified performance. If the layout is not carefully done, the regulator could show poor line and/or load regulation, stability issues as well as EMI problems and interference with RF circuits. It is critical to provide a low inductance, impedance ground path. Therefore, use wide and short traces for the main current paths. The input capacitor should be placed as close as possible to the IC pins as well as the inductor and output capacitor. Use a common power GND node and a different node for the signal GND to minimize the effects of ground noise. Keep the common path to the GND pin, which returns the small signal components and the high current of the output capacitors as short as possible to avoid ground noise. The VOUT line should be connected to the output capacitor and routed away from noisy components and traces (e.g. SW line).

### 11.2 Layout Example

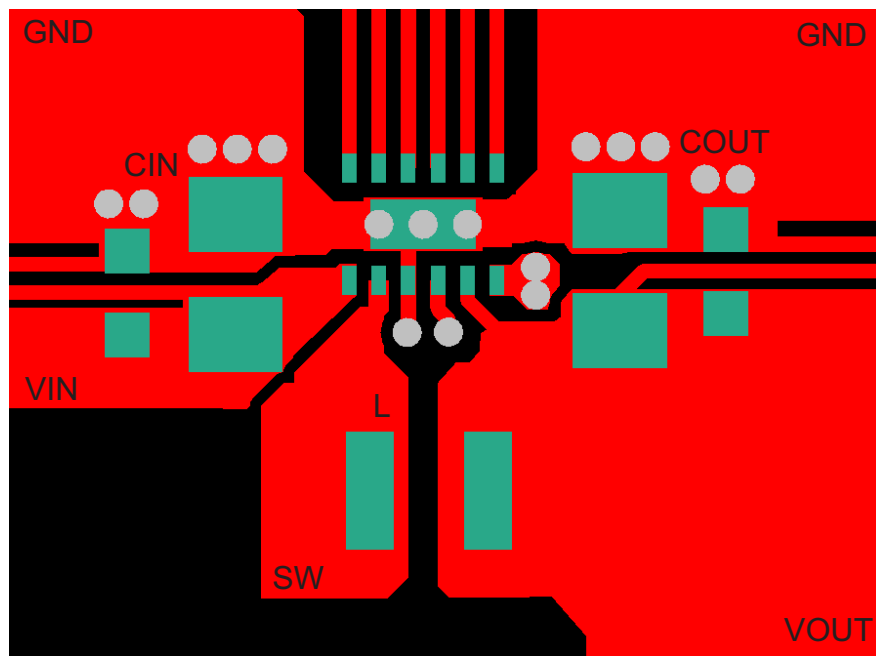

**Figure 40. Recommended PCB Layout**

## 12 Device and Documentation Support

### 12.1 Device Support

#### 12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

### 12.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**Table 9. Related Links**

| PARTS     | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|-----------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| TPS62745  | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS627451 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 12.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.4 Trademarks

DCS-Control, E2E are trademarks of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.6 Glossary

**SLYZ022** — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS627451DSSR    | ACTIVE        | WSON         | DSS                | 12   | 3000           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | PD6I                    | <a href="#">Samples</a> |
| TPS627451DSST    | ACTIVE        | WSON         | DSS                | 12   | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | PD6I                    | <a href="#">Samples</a> |
| TPS62745DSSR     | ACTIVE        | WSON         | DSS                | 12   | 3000           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | PD5I                    | <a href="#">Samples</a> |
| TPS62745DSST     | ACTIVE        | WSON         | DSS                | 12   | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | PD5I                    | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

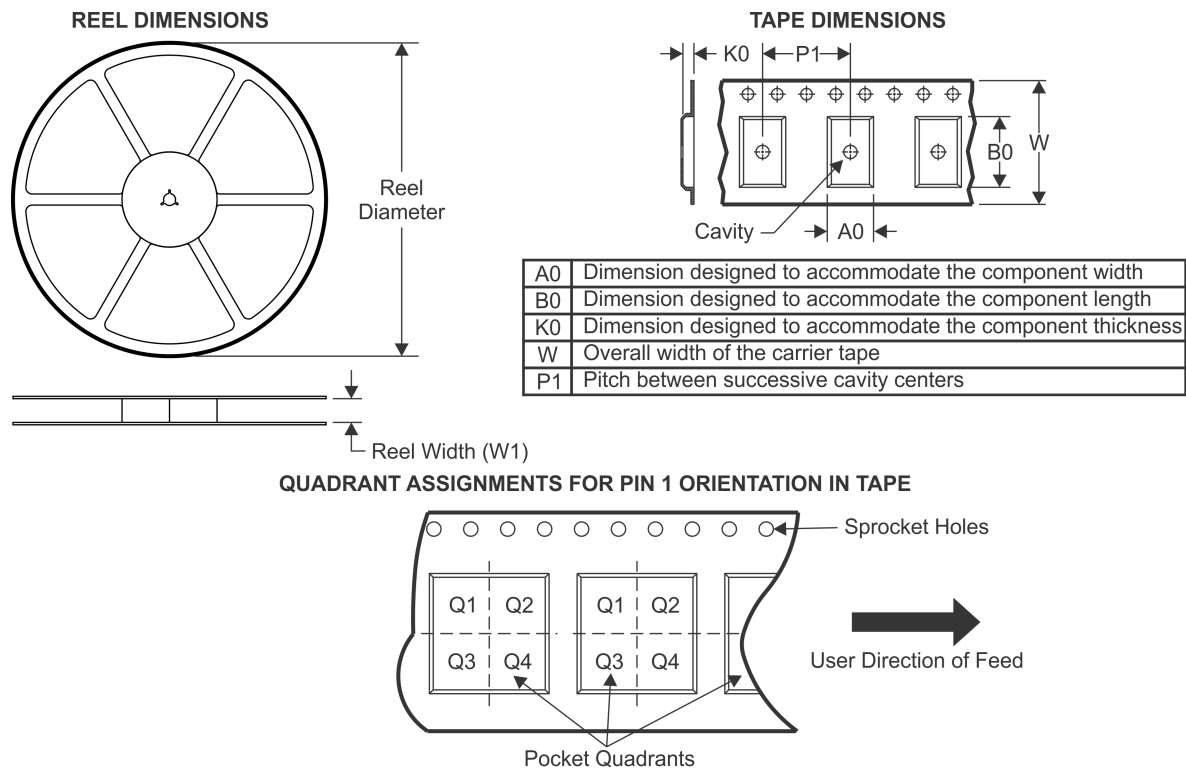**TAPE AND REEL INFORMATION**


\*All dimensions are nominal


| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS627451DSSR | WSO          | DSS             | 12   | 3000 | 180.0              | 8.4                | 2.25    | 3.25    | 1.05    | 4.0     | 8.0    | Q1            |
| TPS627451DSST | WSO          | DSS             | 12   | 250  | 180.0              | 8.4                | 2.25    | 3.25    | 1.05    | 4.0     | 8.0    | Q1            |
| TPS62745DSSR  | WSO          | DSS             | 12   | 3000 | 180.0              | 8.4                | 2.25    | 3.25    | 1.05    | 4.0     | 8.0    | Q1            |
| TPS62745DSST  | WSO          | DSS             | 12   | 250  | 180.0              | 8.4                | 2.25    | 3.25    | 1.05    | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS


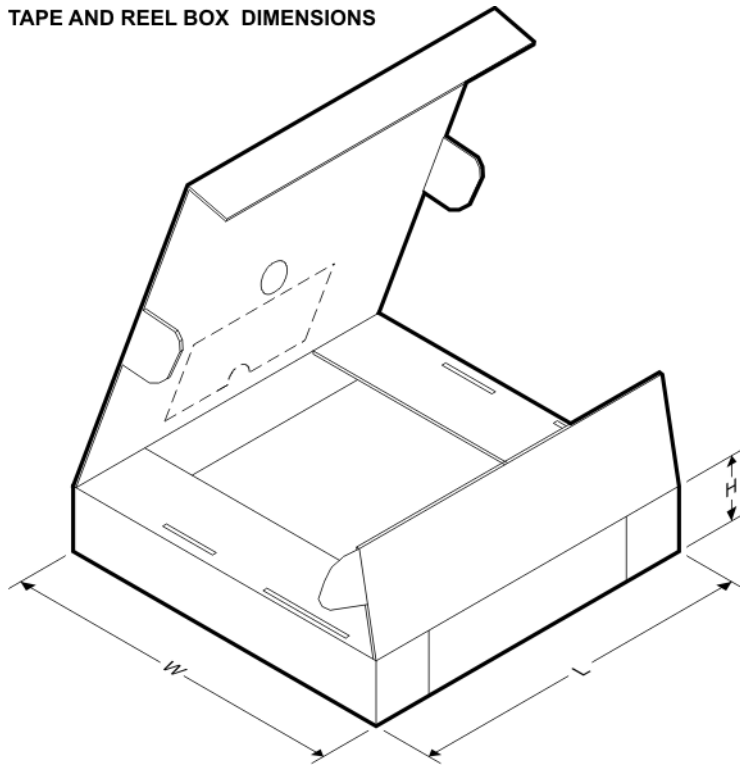


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS627451DSSR | WSON         | DSS             | 12   | 3000 | 210.0       | 185.0      | 35.0        |
| TPS627451DSST | WSON         | DSS             | 12   | 250  | 210.0       | 185.0      | 35.0        |
| TPS62745DSSR  | WSON         | DSS             | 12   | 3000 | 210.0       | 185.0      | 35.0        |
| TPS62745DSST  | WSON         | DSS             | 12   | 250  | 210.0       | 185.0      | 35.0        |

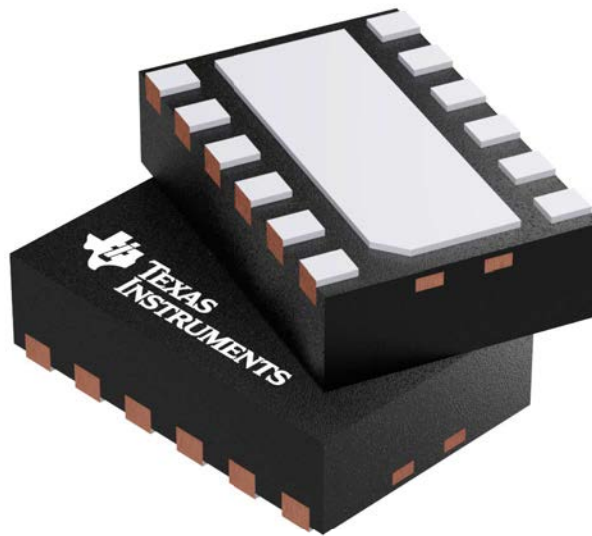

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

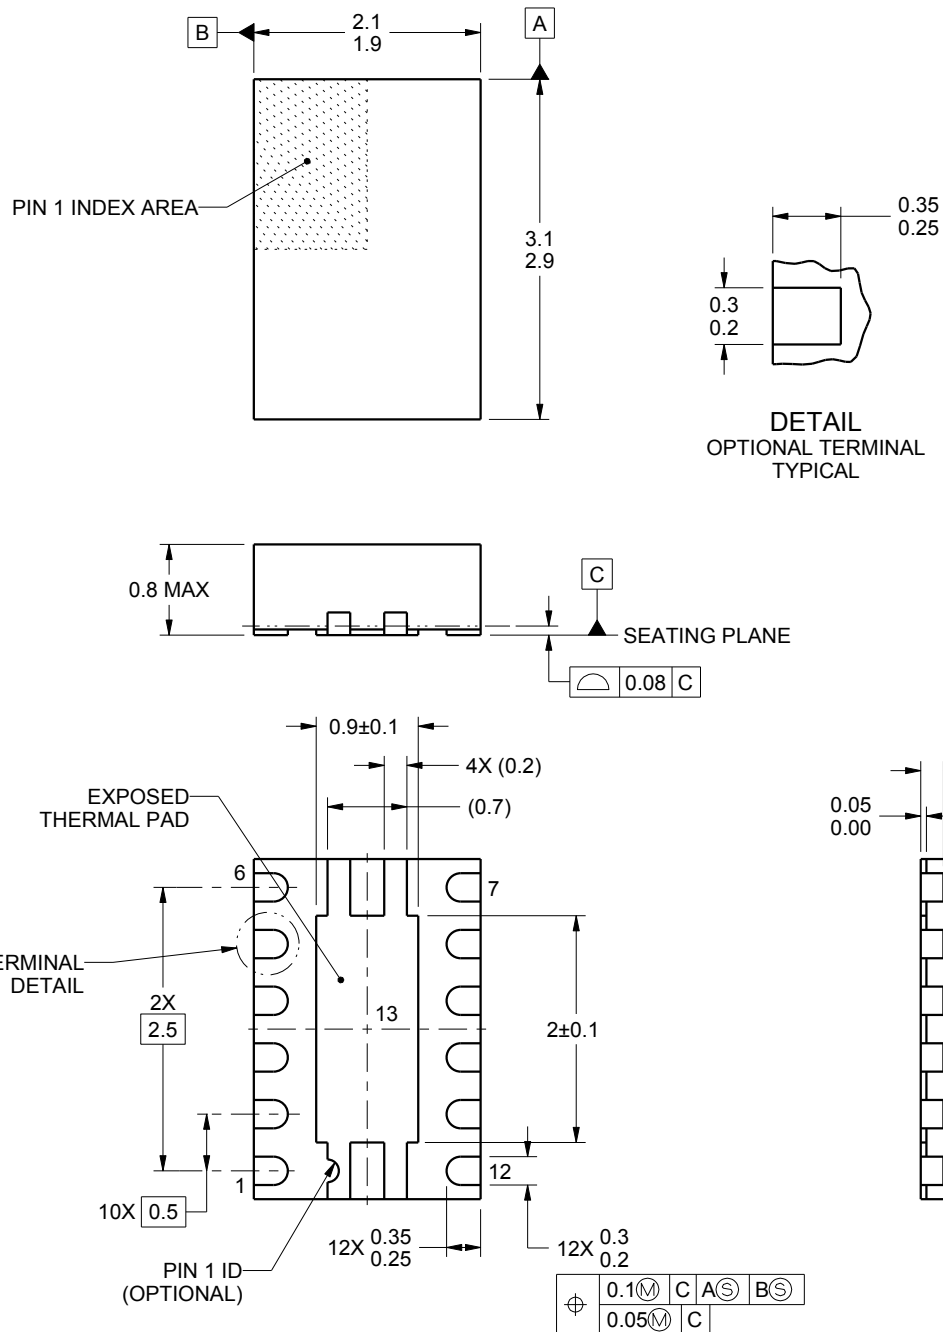

4222684/A 02/2016

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.






## EXAMPLE STENCIL DESIGN

DSS0012A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

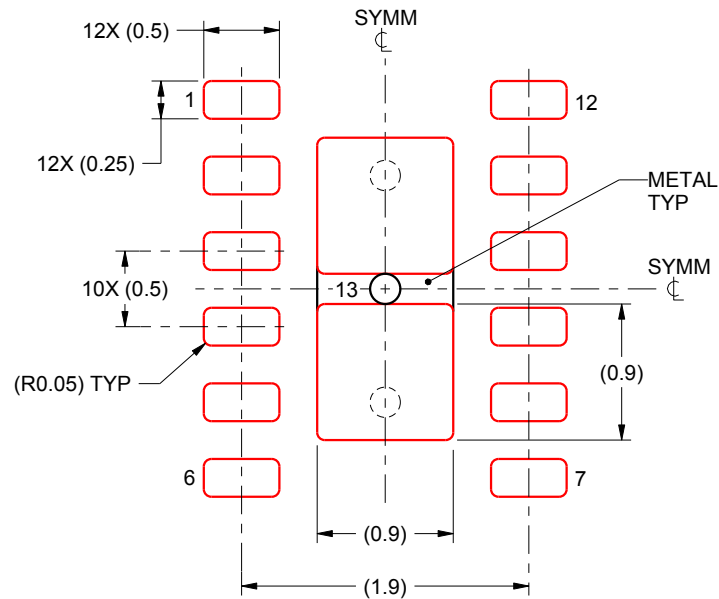

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 13:  
90% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4222684/A 02/2016

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated