
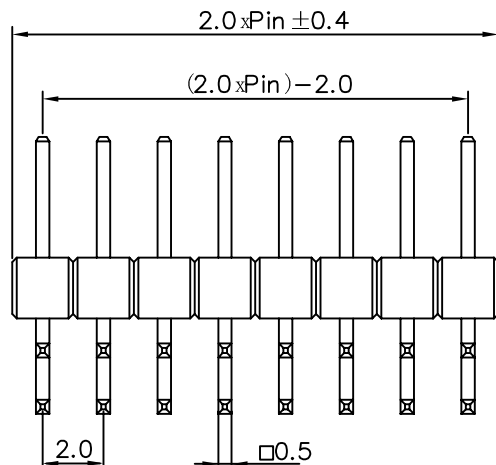
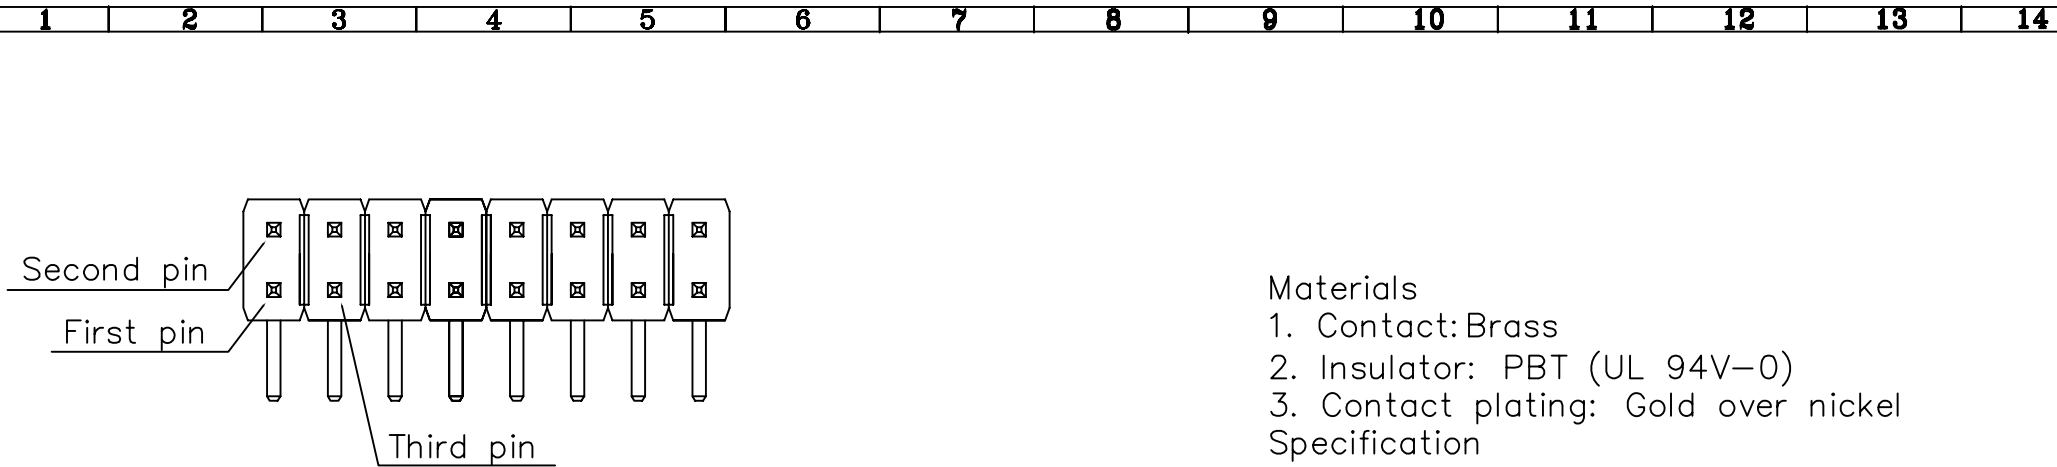


P.C.B. Layout

Materials

1. Contact: Brass
2. Insulator: PBT (UL 94V-0)
3. Contact plating: Gold over nickel

Specification

1. Contact resistance: 20m ohms Max
2. Insulator resistance: 1,000M ohms Min
3. Current rating: 2 Amp
4. Dielectric withstanding voltage: AC 500V
5. Operating temperature: -55°C to +105°C

Order information part number:

200G3-2LXX

NO. of contact
2x2(4Pin) to 2x40 (80 Pin)

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection			Units: mm		X.±
△		Checked By: Simmon	Part No.: 200G3-2LXX	General Dimension Tolerance					.X±0.30
△		Approved By: Tony	Title: 2.00mm pin header 90°						.XX±0.20
SGS Report No.:									
1	2	3	4	5	6	7	8	9	10
11	12	13	14						