

Switch

RockerSwitchSeries

L-KLS7-025-10215BB Small Rocker Switch Series




MATERIAL

1. Housing: Nylon66
2. Rocker: PC&PA66
3. Contacts: Silver Alloy
4. Terminal: Brass Silver Plated
5. Lamp: Neon Lamp, Tungsten Lamp
6. Spring: SWP, SUS
7. Movable Arm: Brass Silver Plated




ELECTRICAL

1. Electrical Rating: 3A125VAC
1A250VAC
2. Mechanical life: Over 30000 Cycles
3. Electrical life: Over 10000 Cycles
4. Contact Resistance: $\leq 20\text{m}\Omega$
5. Insulation Resistance: $1000\text{M}\Omega$ Min
6. High Voltage Resistance: $> 1500\text{V}$ 1min
7. Ambient Temperature: Terminal Side $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
Actuating Side $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$
8. Storage Temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$ Max
9. Atmospheric Humidity: Max 85%
10. Actuating force: $4 \sim 8\text{N}$ (depends on different switch function)
11. Flammability: UL94V-2
12. Temperature rise at the terminal: Max 30°C (UI1054)
13. Solderability of terminal: Max 350°C 3S

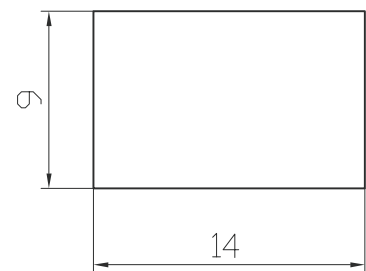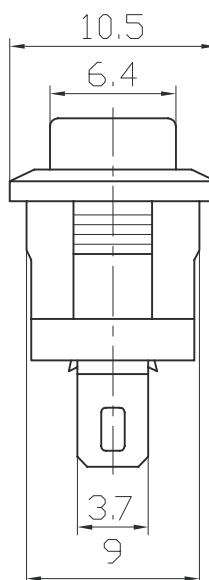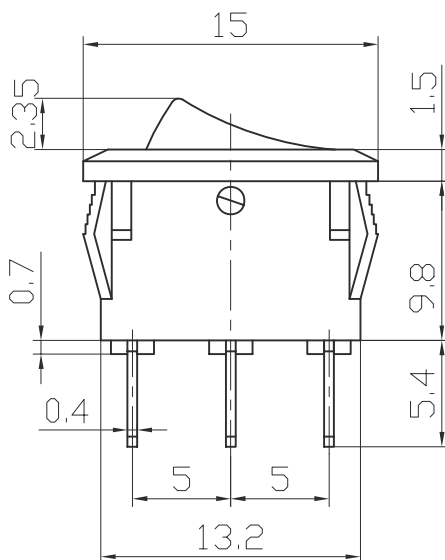

Panel hole size



SWITCHING CIRCUIT