
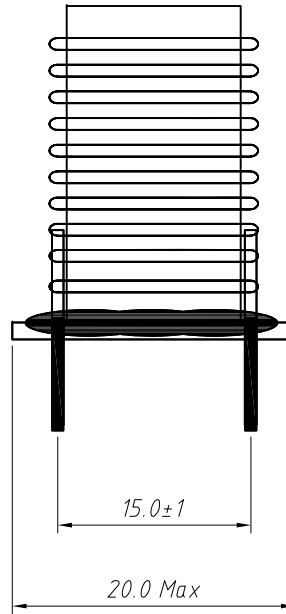



1. PHYSICAL CHARACTERISTICS(mm)

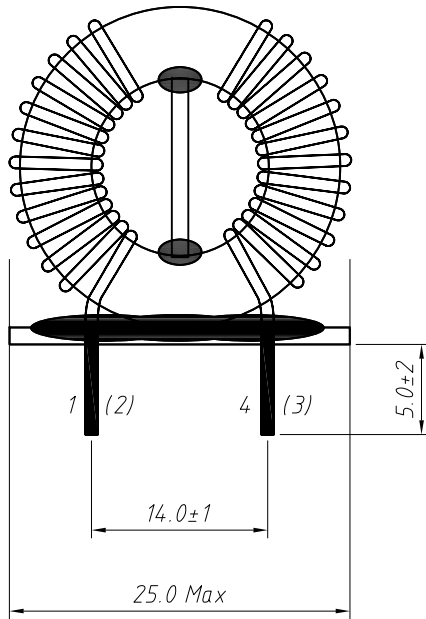

3. ELECTRONICAL SPECIFICATIONS

Inductance:	4.0mH Min (@ 1.0KHz, 0.1V)
Inductance balance:	100uH Max
RDC:	54.0mΩ Max
Rated current:	4A Max (Coil Temp rise 60 °C max)
Rated voltage:	250V _{ac}
Core:	N80-2008
Test Instrument:	L: HP4284A RDC: HM2540

2. ELECTRONICAL SCHEMATIC

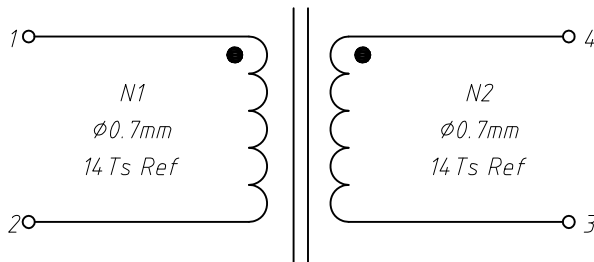

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL 94 V-0
- ASTM oxygen index: >28%

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Toroidal Common Mode Chokes
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		
X. ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 1	
.XX ±2°			

KLS
NINGBO KLS ELECTRONIC CO., L TD.