


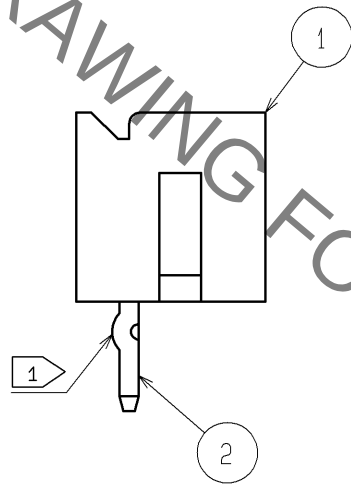
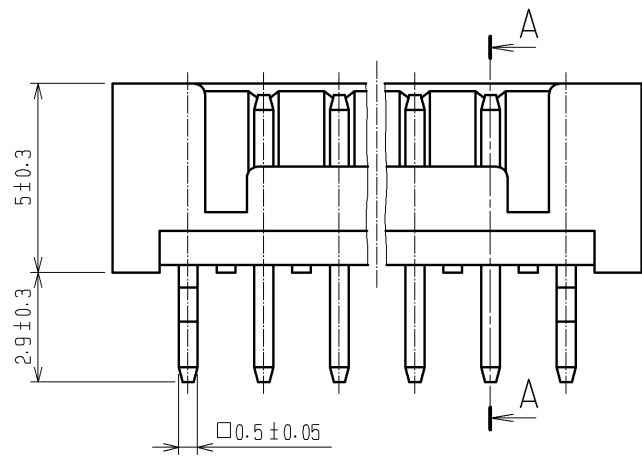
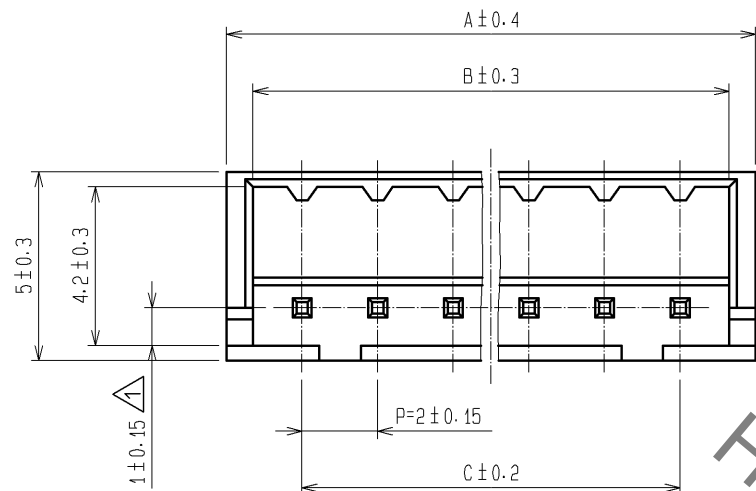




A-A

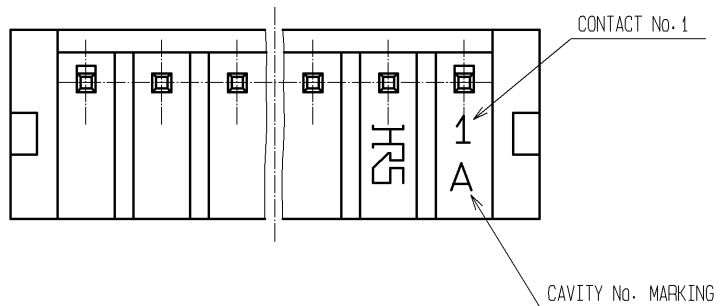

RECOMMENDED PATTERN

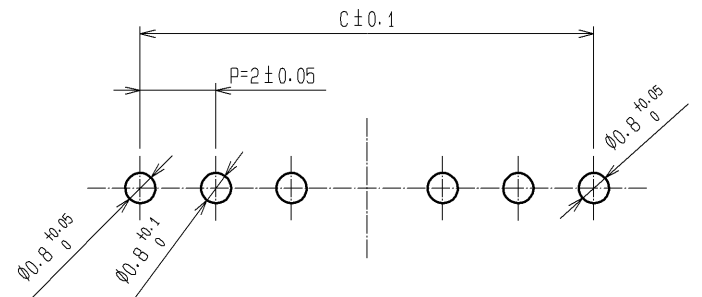

NOTES 1: KINK PROCESSING IS CARRIED OUT TO THE TERMINAL OF BOTH SIDES. (CONTACT No. 1, No. *)

1	POLYAMIDE	BLACK, UL94V-0	2	BRASS	SURFACE: TIN PLATED 1μ min UNDER PLATING: NICKEL PLATED 0.5μ min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-004732	DESIGNED MI. SAKIMURA
HIROSE ELECTRIC CO., LTD.		APPROVED : TY. OMA	06.08.31	DRAWING NO.	EDC3-162184-03
		CHECKED : HK. UMEHARA	06.08.31	PART NO.	DF3A-*P-2DSA
		DESIGNED : TS. KUMAZAWA	06.08.30	CODE NO.	CL543
		DRAWN : AK. MIURA	06.08.29		
					1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF3A-6P-2DSA](#)