



SPECIFICATION

Current Rate:1.5 AMP
Insulation Resistance:1000M Ω Min.
Contact Resistance:20m Ω Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


MATERIAL

Insulator:Polyester,UL 94V-0
Standard:Nylon 6T
Contact Pin:Copper Alloy
Contact Plating:Gold Flash all over

PLD2-xSP
Pin Header 2.0mm 2 Row H=1.5/2.0mm SMT Type

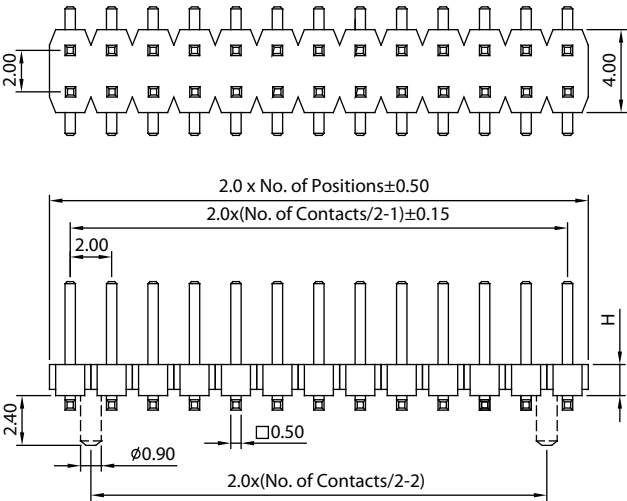

	Code	Dim. A	Dim. B	Dim. C	
				H=1.5	H=2.0
Dual Row	300	3.00	6.20	2.20	2.70
	400	4.00	6.20	2.20	2.70

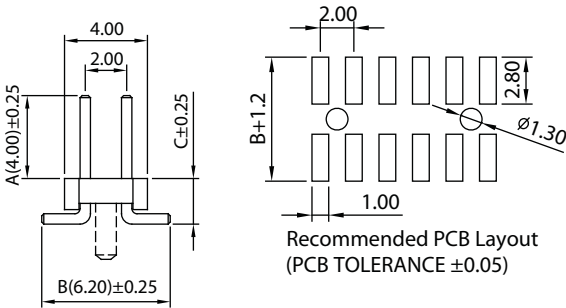

PLHD2-xSP
Pin Header 2.0mm 2 Row H=1.5/2.0mm Stack SMT Type

