


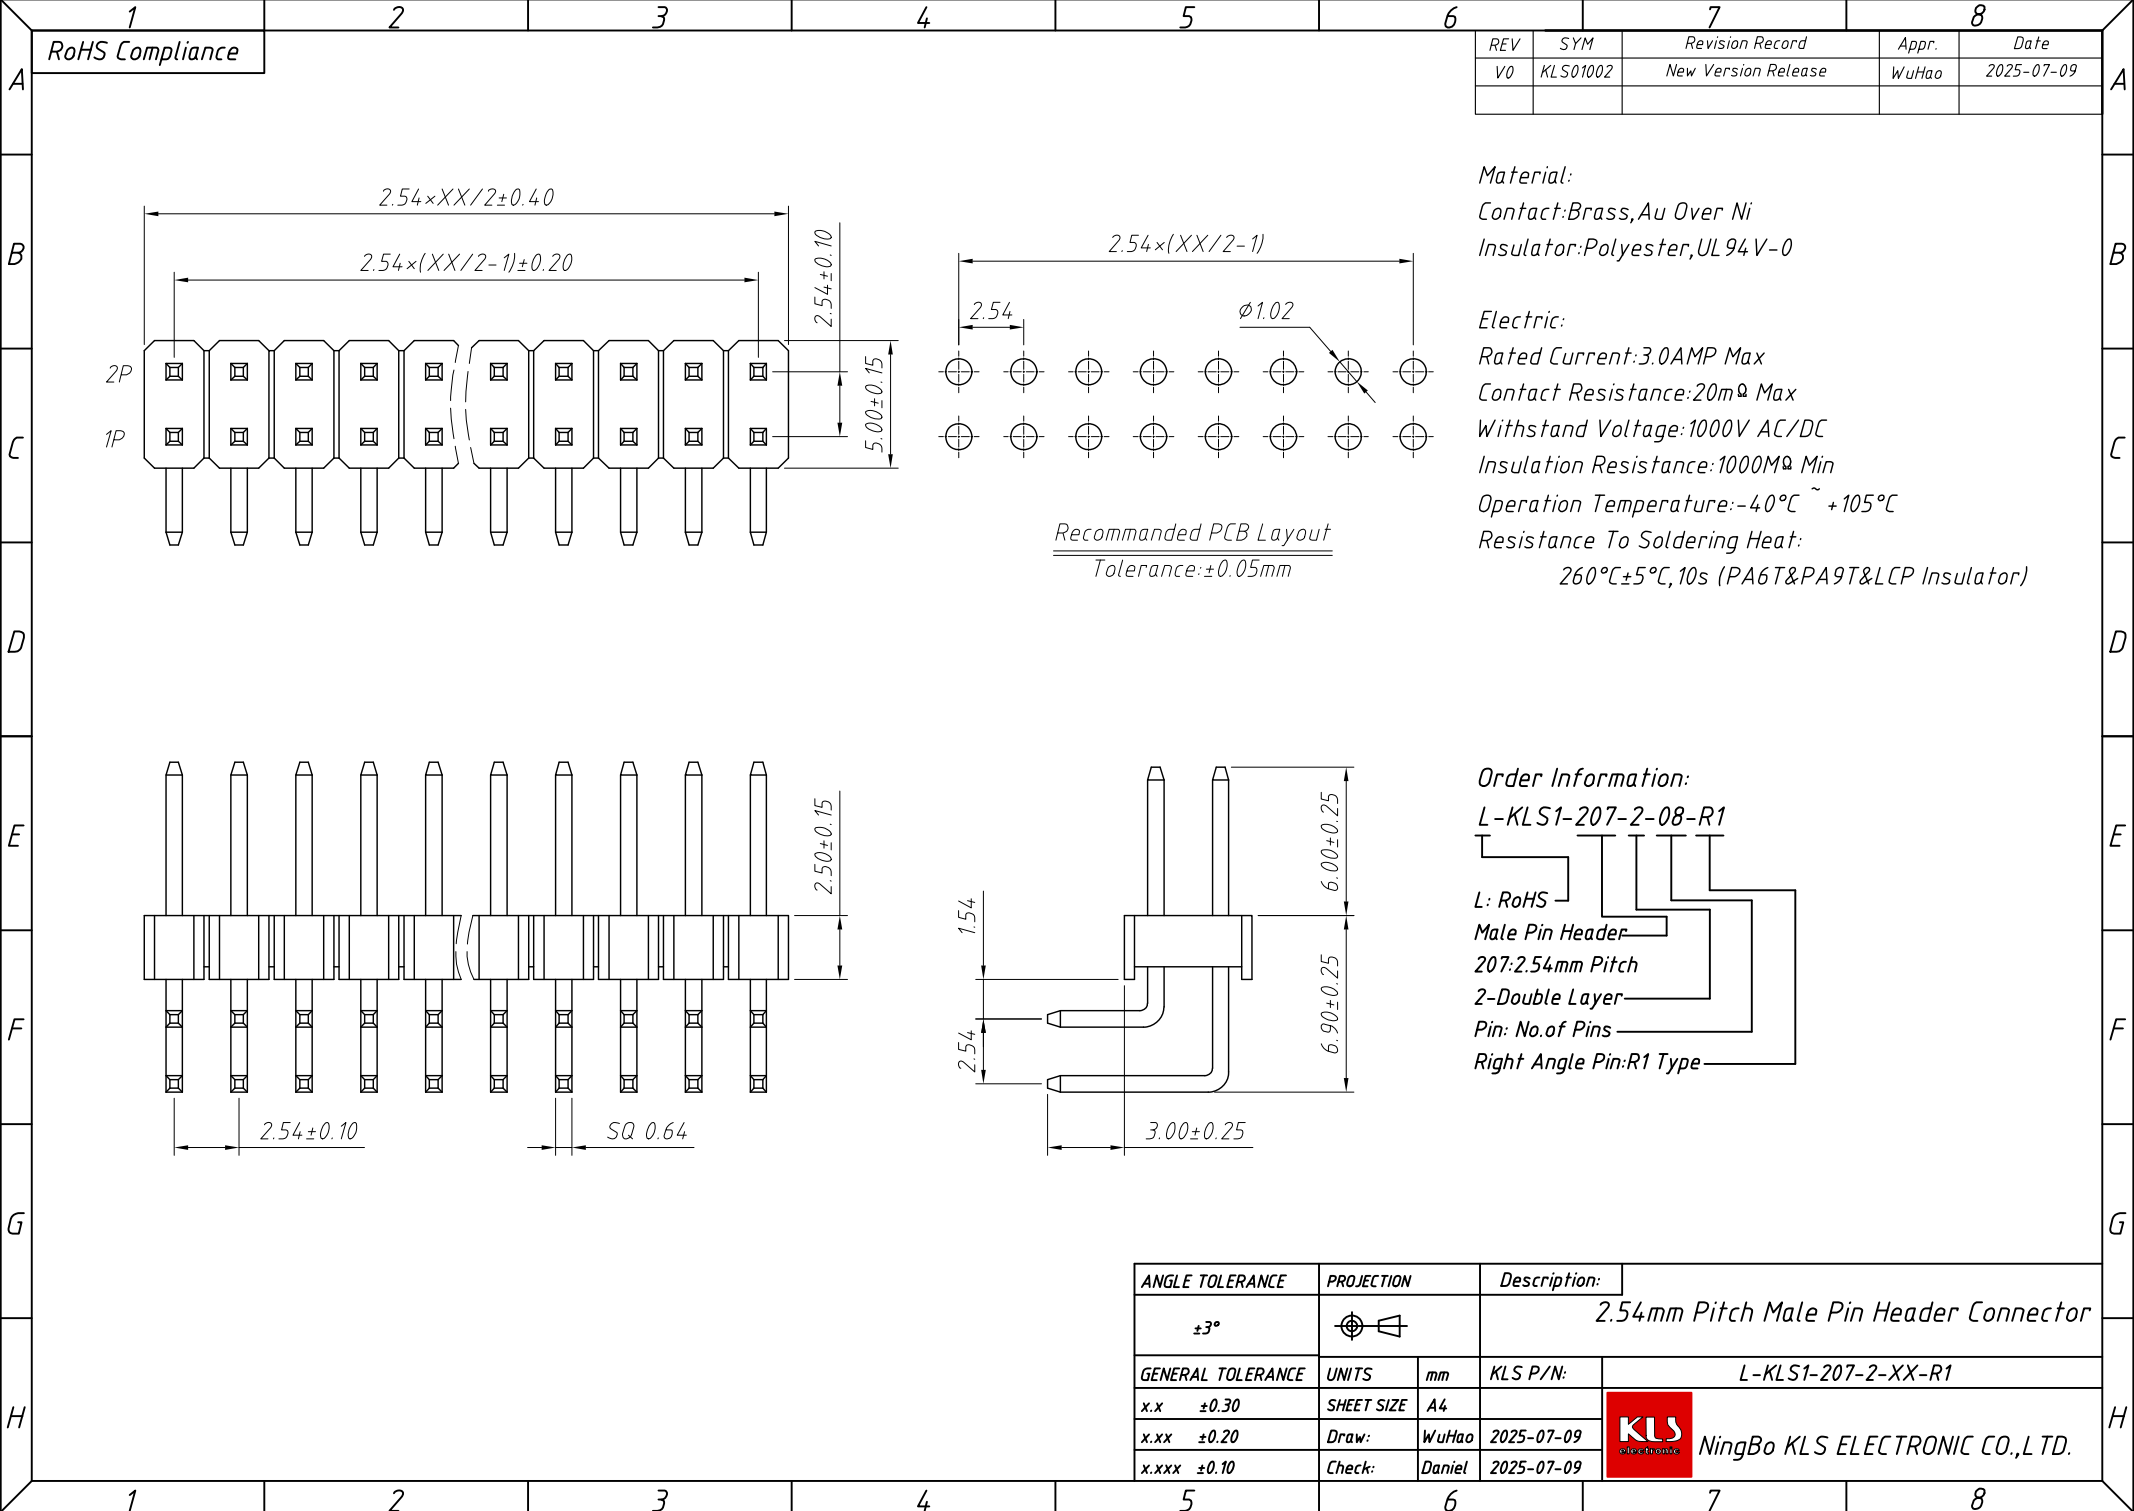

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01002	New Version Release	WuHao	2025-07-09

Material:
Contact:Brass,Au Over Ni
Insulator:Polyester,UL 94 V-0

Electric:
Rated Current:3.0AMP Max
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ ~ +105℃
Resistance To Soldering Heat:
260℃±5℃,10s (PA6T&PA9T&LCP Insulator)

Order Information:
L-KLS1-207-2-08-R1

L: RoHS
Male Pin Header
207:2.54mm Pitch
2-Double Layer
Pin: No.of Pins
Right Angle Pin:R1 Type

ANGLE TOLERANCE	PROJECTION	Description:
±3°		2.54mm Pitch Male Pin Header Connector
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-07-09
x.xxx ±0.10	Check:	Daniel 2025-07-09

NingBo KLS ELECTRONIC CO.,L TD.