

HSF RoHS

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max at DC 100mA

Withstand Voltage:500V AC/DC 50Hz For 1minute

Insulation Resistance:1000MΩ Min




Operation Temperature:-40℃ to +105℃

Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA46/PBT

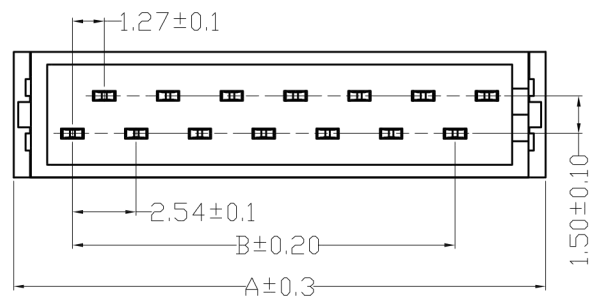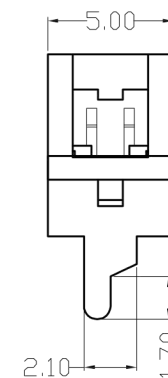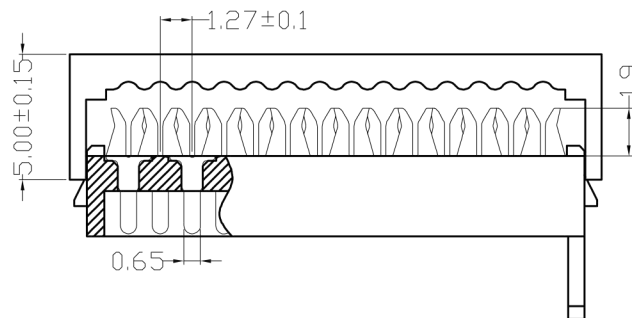

PINS	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.4
24	33.85	27.94
26	36.39	30.48

				OPERATION		DRAW	WZG	14.07.10	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD.	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-204E-10-B
				X.XXX	±0.10				SHEET	1/1		
A0	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE			PROJ.	◆	TITLE:	1.27 Micro Match Connector IDC Type Black
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							