

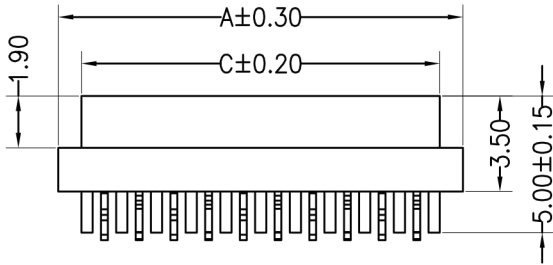
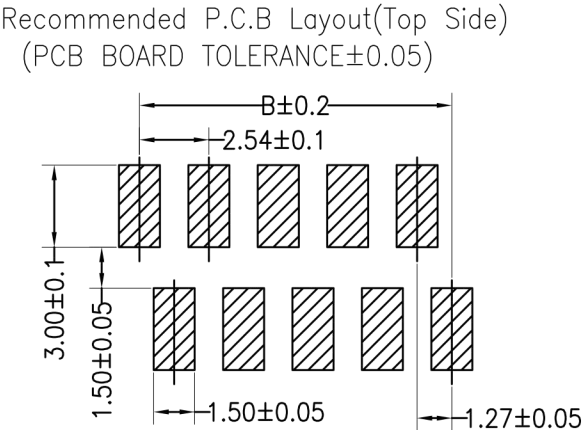
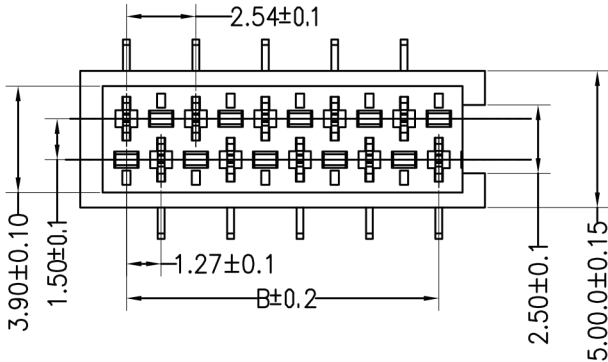


HSF RoHS

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Phosphor Bronze
Contact Plating:Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA46
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

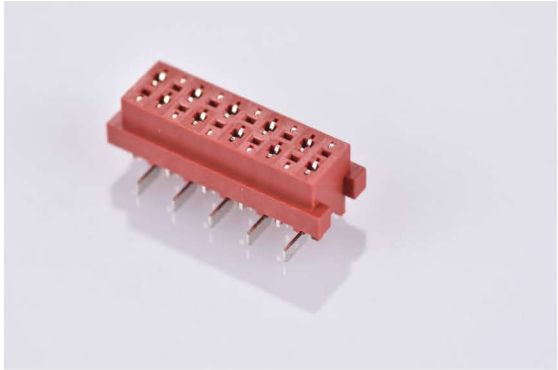

PINS	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

				OPERATION		DRAW	YiYuSheng	12.04.11	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD.		
				X.X	±0.30				UNIT	mm			
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-204G-10-B	
A0	2012.04.11	NEW DRAWING		X.XXX	±0.10				SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE			PROJ.		TITLE:	Micro Match Female-SMT Type Black
					DIM	TOL							