

	1	2	3	4	5	6	7	8	9
G	Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE ± 0.05)								G

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

F	Insulation Resistance:1000MΩ Min
---	----------------------------------

Operation Temperature: -40°C to +105°C





Contact Material:Brass

Contact Plating:	Au Over Ni
------------------	------------

Insulator Material: Polyester (UL 94V-0)

Standard: PA6T

E	Max.Processing Temp: 230°C for 30–60 seconds (260°C for 10 seconds)
---	--

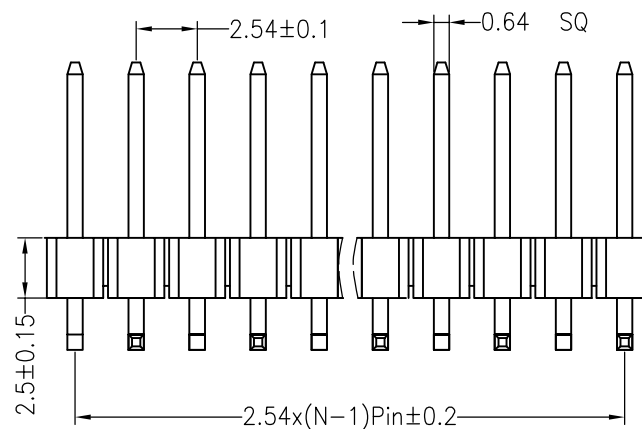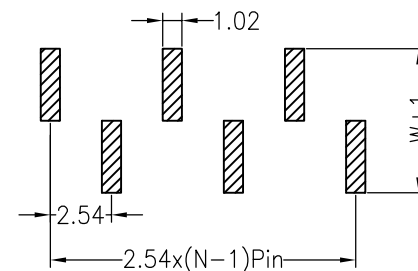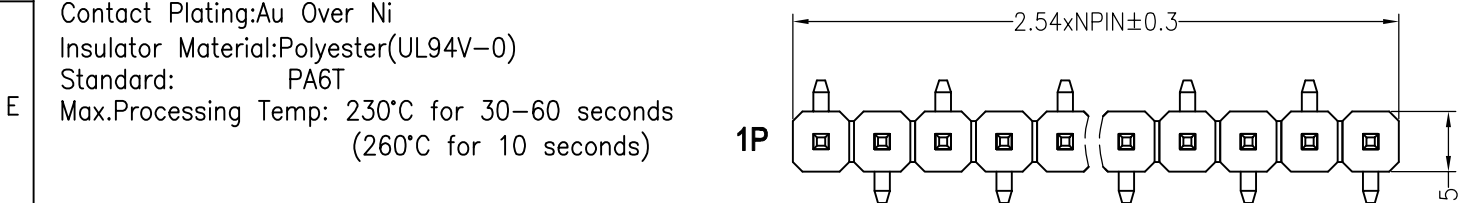

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	6.00	3.30	9.00	13.2

				OPERATION		DRAW	YiYuSheng	12.03.28	SCALE	FIT	NINGBO KLS ELECTRONIC CO., LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-207-1-02-T1-6.0x9.0x0.
				X.XXX	±0.10				SHEET	1/1		
AO	2012.03.28	NEW DRAWING		Angle	±3°	APPROVE			SHEET	1/1	TITLE:	2.54mm Pin Header 2.5mm SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL				PROJ.			

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---