



MP201701
ZF Electronics

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

Magnetic Proximity Sensors (Reed)



MP2017 Sensors

Reed based magnetic proximity sensor
encapsulated in smooth plastic barrel

Description

The MP2 Series sensors are reed proximity sensors. Normally open or closed contacts change states when a magnetic field is applied. The sensors act as non-latching electrical switches.

Features

- Contacts hermetically sealed for long life
- Zero power consumption
- Suitable for DC and AC circuits
- RoHS compliant
- IP65
- Operate/Release Distances*: 3.81 mm – 12.7 mm (0.15" – 0.5")

Typical Applications

- Door position & interlock
- Limit switch
- Flow/speed
- Home security
- Pedal switch

Environmental Specifications

Vibration	20 g 10 Hz to 1 kHz (MP201701), 20 g 10 Hz to 55 Hz (MP201702, MP201703)
Operating Temperature	-40 °C to 105 °C (-40 °F to 221 °F)
Storage Temperature	-40 °C to 105 °C (-40 °F to 221 °F)
Ingress Protection	IP65

Electrical Specifications

Typical Operating Time	1 ms
Breakdown Voltage	200 VDC min.
Switching Voltage and Current	See Products chart
Contact Resistance and Power rating:	See Products chart

Mechanical Specifications

Housing Material	Glass-reinforced Plastic
Operate/Release Distances*	3.81 mm – 12.7 mm (0.15" – 0.5")
*with AS201701 magnetic actuator	


Products

Part Number	Contact Form	Maximum Power Rating	Maximum Switching Voltage	Maximum Switching Current	Maximum Contact Resistance
MP201701	SPST-NO Form A	10 W	175 VAC/VDC	0.5 A	0.200 Ω
MP201702	SPST-NC Form B	3 W	30 VAC/VDC	0.2 A	0.100 Ω
MP201703	SPDT-CO Form C	3 W	30 VAC/VDC	0.2 A	0.100 Ω


All MP2017 sensors come with leads 24 AWG x 305 mm (12")

Dimensions mm (inches)

MP201701 (Form A - N.O.) and MP201702 (Form B - N.C.)

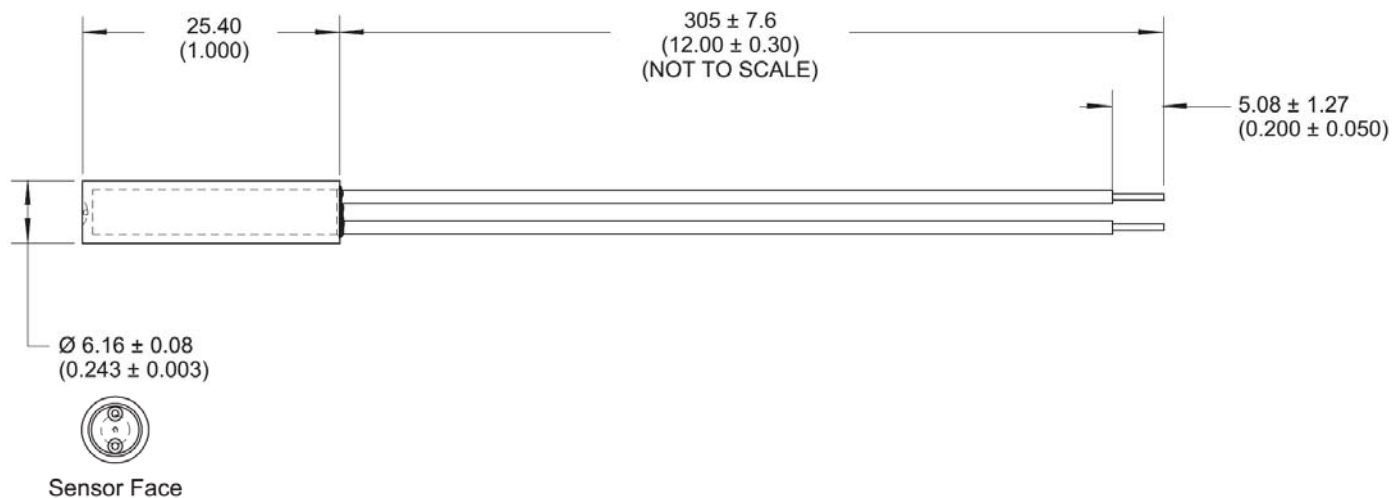

MP201703 (Form C - SPDT Changeover)

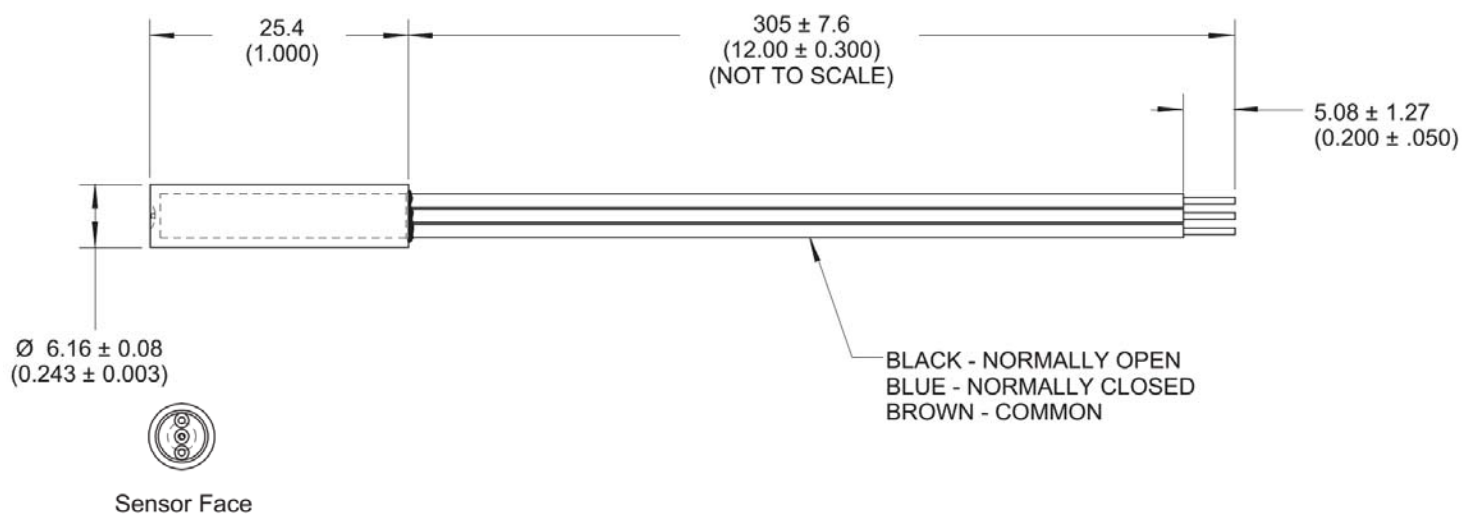

MAGNETIC ACTUATOR AS201701

