
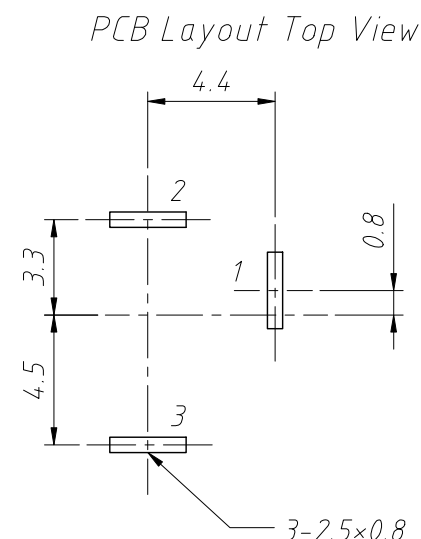
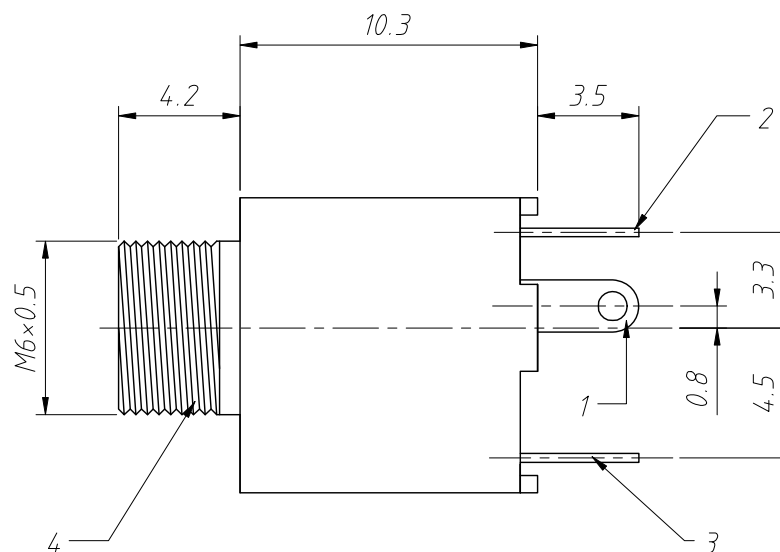


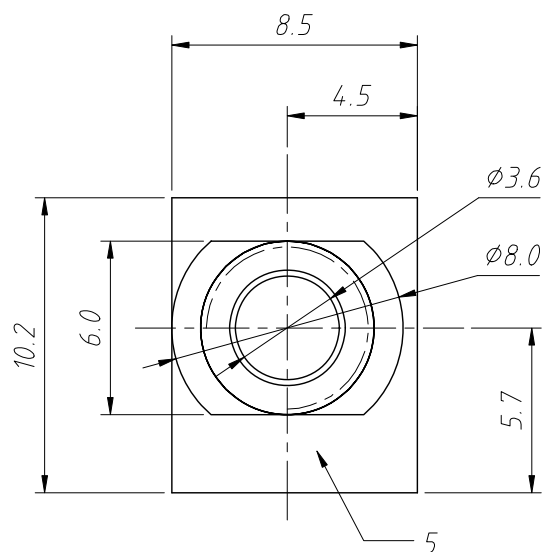


Material:

1. Contact Foot: Bronze, Cu-Sn-Plating
2. Curve Piece: H62 Brass, Cu-Sn-Plating
3. Spring Piece: 65Mn Steel, Sn-Sb-Plating
4. Axis Support: H59 Brass, Ni-Plating
5. Housing: PA66

Specification:

1. Rating: DC 30V 0.5A
2. Contact resistance: $\leq 0.03\Omega$
3. Insulation resistance: $\geq 100M\Omega$ (DC250V)
4. Withstand voltage: 500VAC
5. Insertion and extraction force: 3-25N
6. life test: 5,000 cycles

Schematic



GENERAL TOLERANCE	PROJECTION		Description:
X. ± 0.50	UNITS	mm	3.5mm Stereo Phone Jack
.X ± 0.25	SCALE	1:1	
.XX ± 0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-TSJ3.5-034AA
X. $\pm 5^\circ$	Date	2022-11-15	NingBo KLS ELECTRONIC CO.,LTD.
.X $\pm 3^\circ$	SHEET	1 OF 1	
.XX $\pm 2^\circ$			