
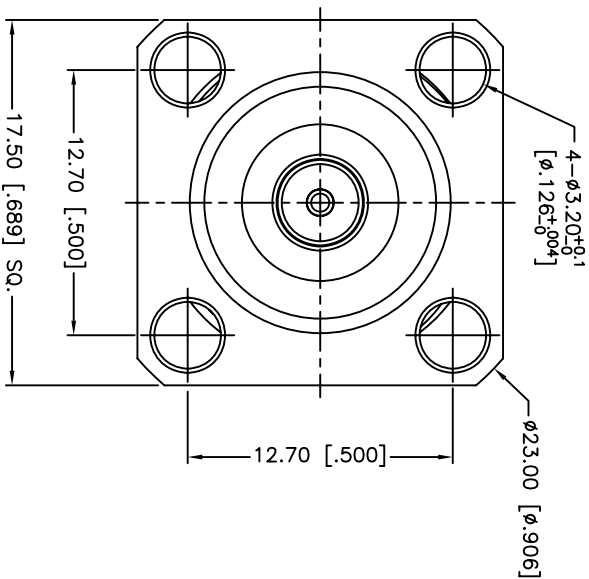



REV.	DATE	ECR NO.	DESCRIPTION
NC	10/05/04	XXXXXX	INITIAL RELEASE
A	10/07/04	XXXXXX	UPDATE DRAWING FORMAT
B	11/18/13	2660	UPDATE DRAWING FORMAT

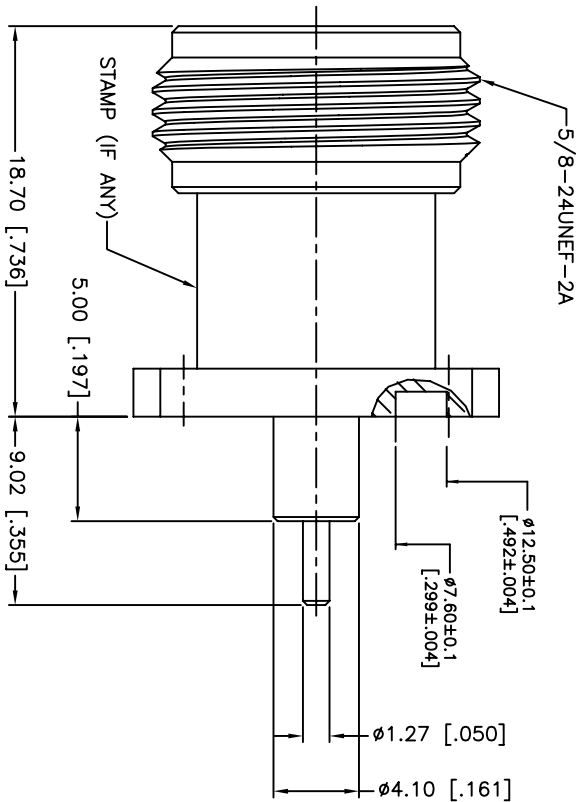

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0-11 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C

2. FREQUENCY RANGE: 0-11 GHZ				Amphenol Connex								
3. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.												
4. DURABILITY: 500 CYCLES MIN.												
5. TEMPERATURE RANGE: -65°C TO +165°C												
5	GASKET	SILICONE RUBBER	RED	1	PART DESCRIPTION N PANEL RECEPTACLE JACK EXTENDED TEFLON (.197"/.355")							
4	LOCK RING	BRASS	NEXCOTE	1								
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1								
2	INSULATOR	PTFE	NATURAL	1								
1	BODY	BRASS	NEXCOTE	1								
DESCRIPTION		MATERIAL		FINISH	QTY	PART NO. 172117-28						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 6mm ± 0.10mm 6 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 - .236 = ± 0.004" .236 - 1.180 = ± 0.007" 1.180 - 4.724 = ± 0.012" ANGLES ± 1°					DO NOT SCALE DRAWING							
					APPROVALS					DATE		
					DRAWN M.ZHANG					11/18/13		
					CHECKED							
ISSUED												
SHEET 1 OF 1												
CAD FILE C:/CONNEX/172117-28.DWG						DWG. NO. 172117-28.DWG		REV. B	SIZE A	SCALE NA		

Amphenol Connex