


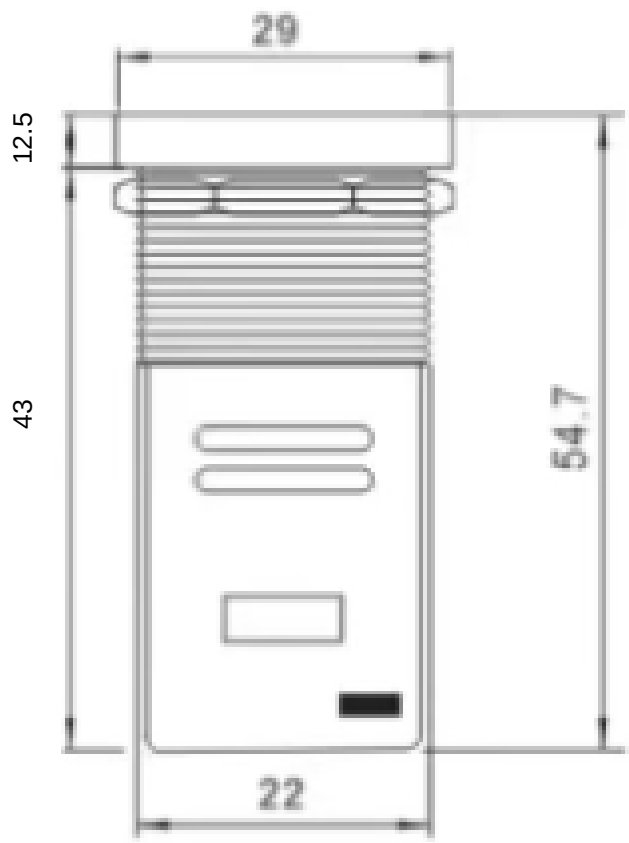

Notes:

1:Material:
Contact:Brass
Shell:PA66

2:Electric:
Rating:DC 30V 0.3A
Contact Resistance:30 mΩ Max.
Insulator Resistance:500 MΩ Min
Withstanding Voltage:800V AC (50Hz) /1min
Force:2~8N
Durability:100000 Cycles Min.
Operating Temperature:-25℃~+55℃

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			LED Push Button Switch	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	KLS7-LPB-M22-06-N-G
x.x ±0.30	SHEET SIZE	A4	XX	 NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Daniel	2023-06-01	
x.xxx ±0.10	Check:	Daniel	2023-06-01	