


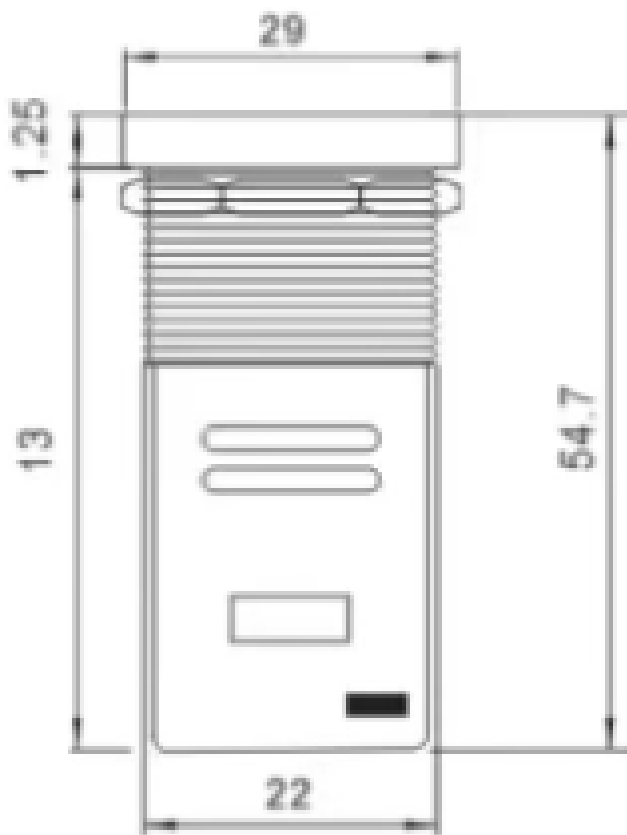

Notes:

1:Material:

Contact:Brass

Shell:PA66

2:Electric:

Rating:DC 30V 0.3A

Contact Resistance:30 mΩ Max.

Insulator Resistance:500 MΩ Min

Withstanding Voltage:800V AC (50Hz) /1min

Force:2~8N

Durability:100000 Cycles Min.

Operating Temperature:-25℃~+55℃

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				LED Push Button Switch	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	KLS7-LPB-M22-06-Z-B
x.x	±0.30	SHEET SIZE	A4	XX	 NingBo KLS ELECTRONIC CO.,L TD.
x.xx	±0.20	Draw:	Daniel	2023-06-01	
x.xxx	±0.10	Check:	Daniel	2023-06-01	