


NINGBO KLS ELECTRONIC CO., LTD.

产品规格书
THE SPEC SHEET

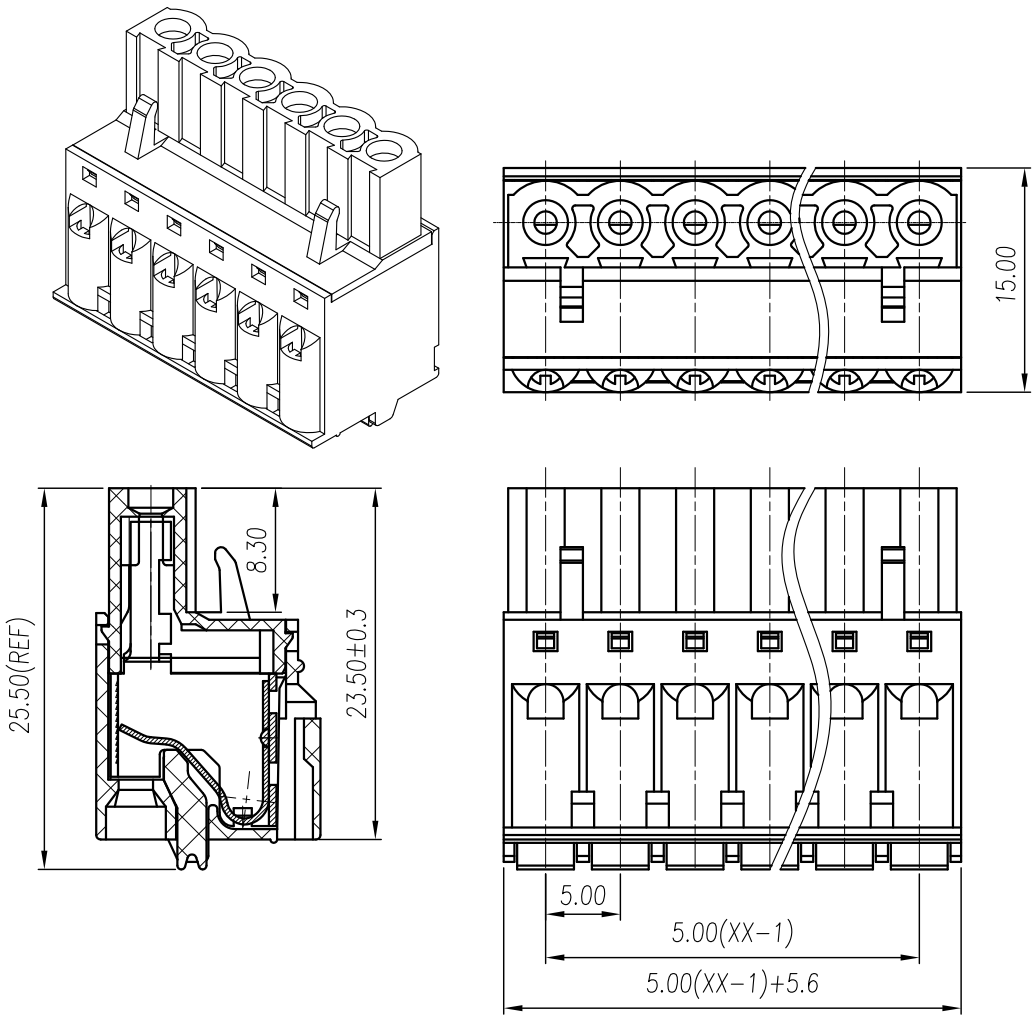

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	320V
额定电流/Rated current	10A	10A
接触电阻/Contact resistance	20mΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28~14AWG	2.5mm²
耐电压/Wrth standing voltage	AC 2000V/1 Min	
机械性能/Mechanical		
剥线长度/Steip Length	7-8mm	
温度范围/Temp.Range	-40℃~+105℃	
尺寸/Dimensions		
间距/Pitch	5.0mm	
极数/Poles	2-24P	
材质及电镀/Material		
塑件/Housing	PA66, UL94V-0	
夹子/Clamp	Copper alloy ,Sn plated	
弹片/Shrapnel	Stainless steel	

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	第三视角 / THIRD ANGLE PROJECTION	
NINGBO KLS ELECTRONIC CO., LTD.						名称 / TITLE	L-KLS2-EDKE-5.00-04P-4