


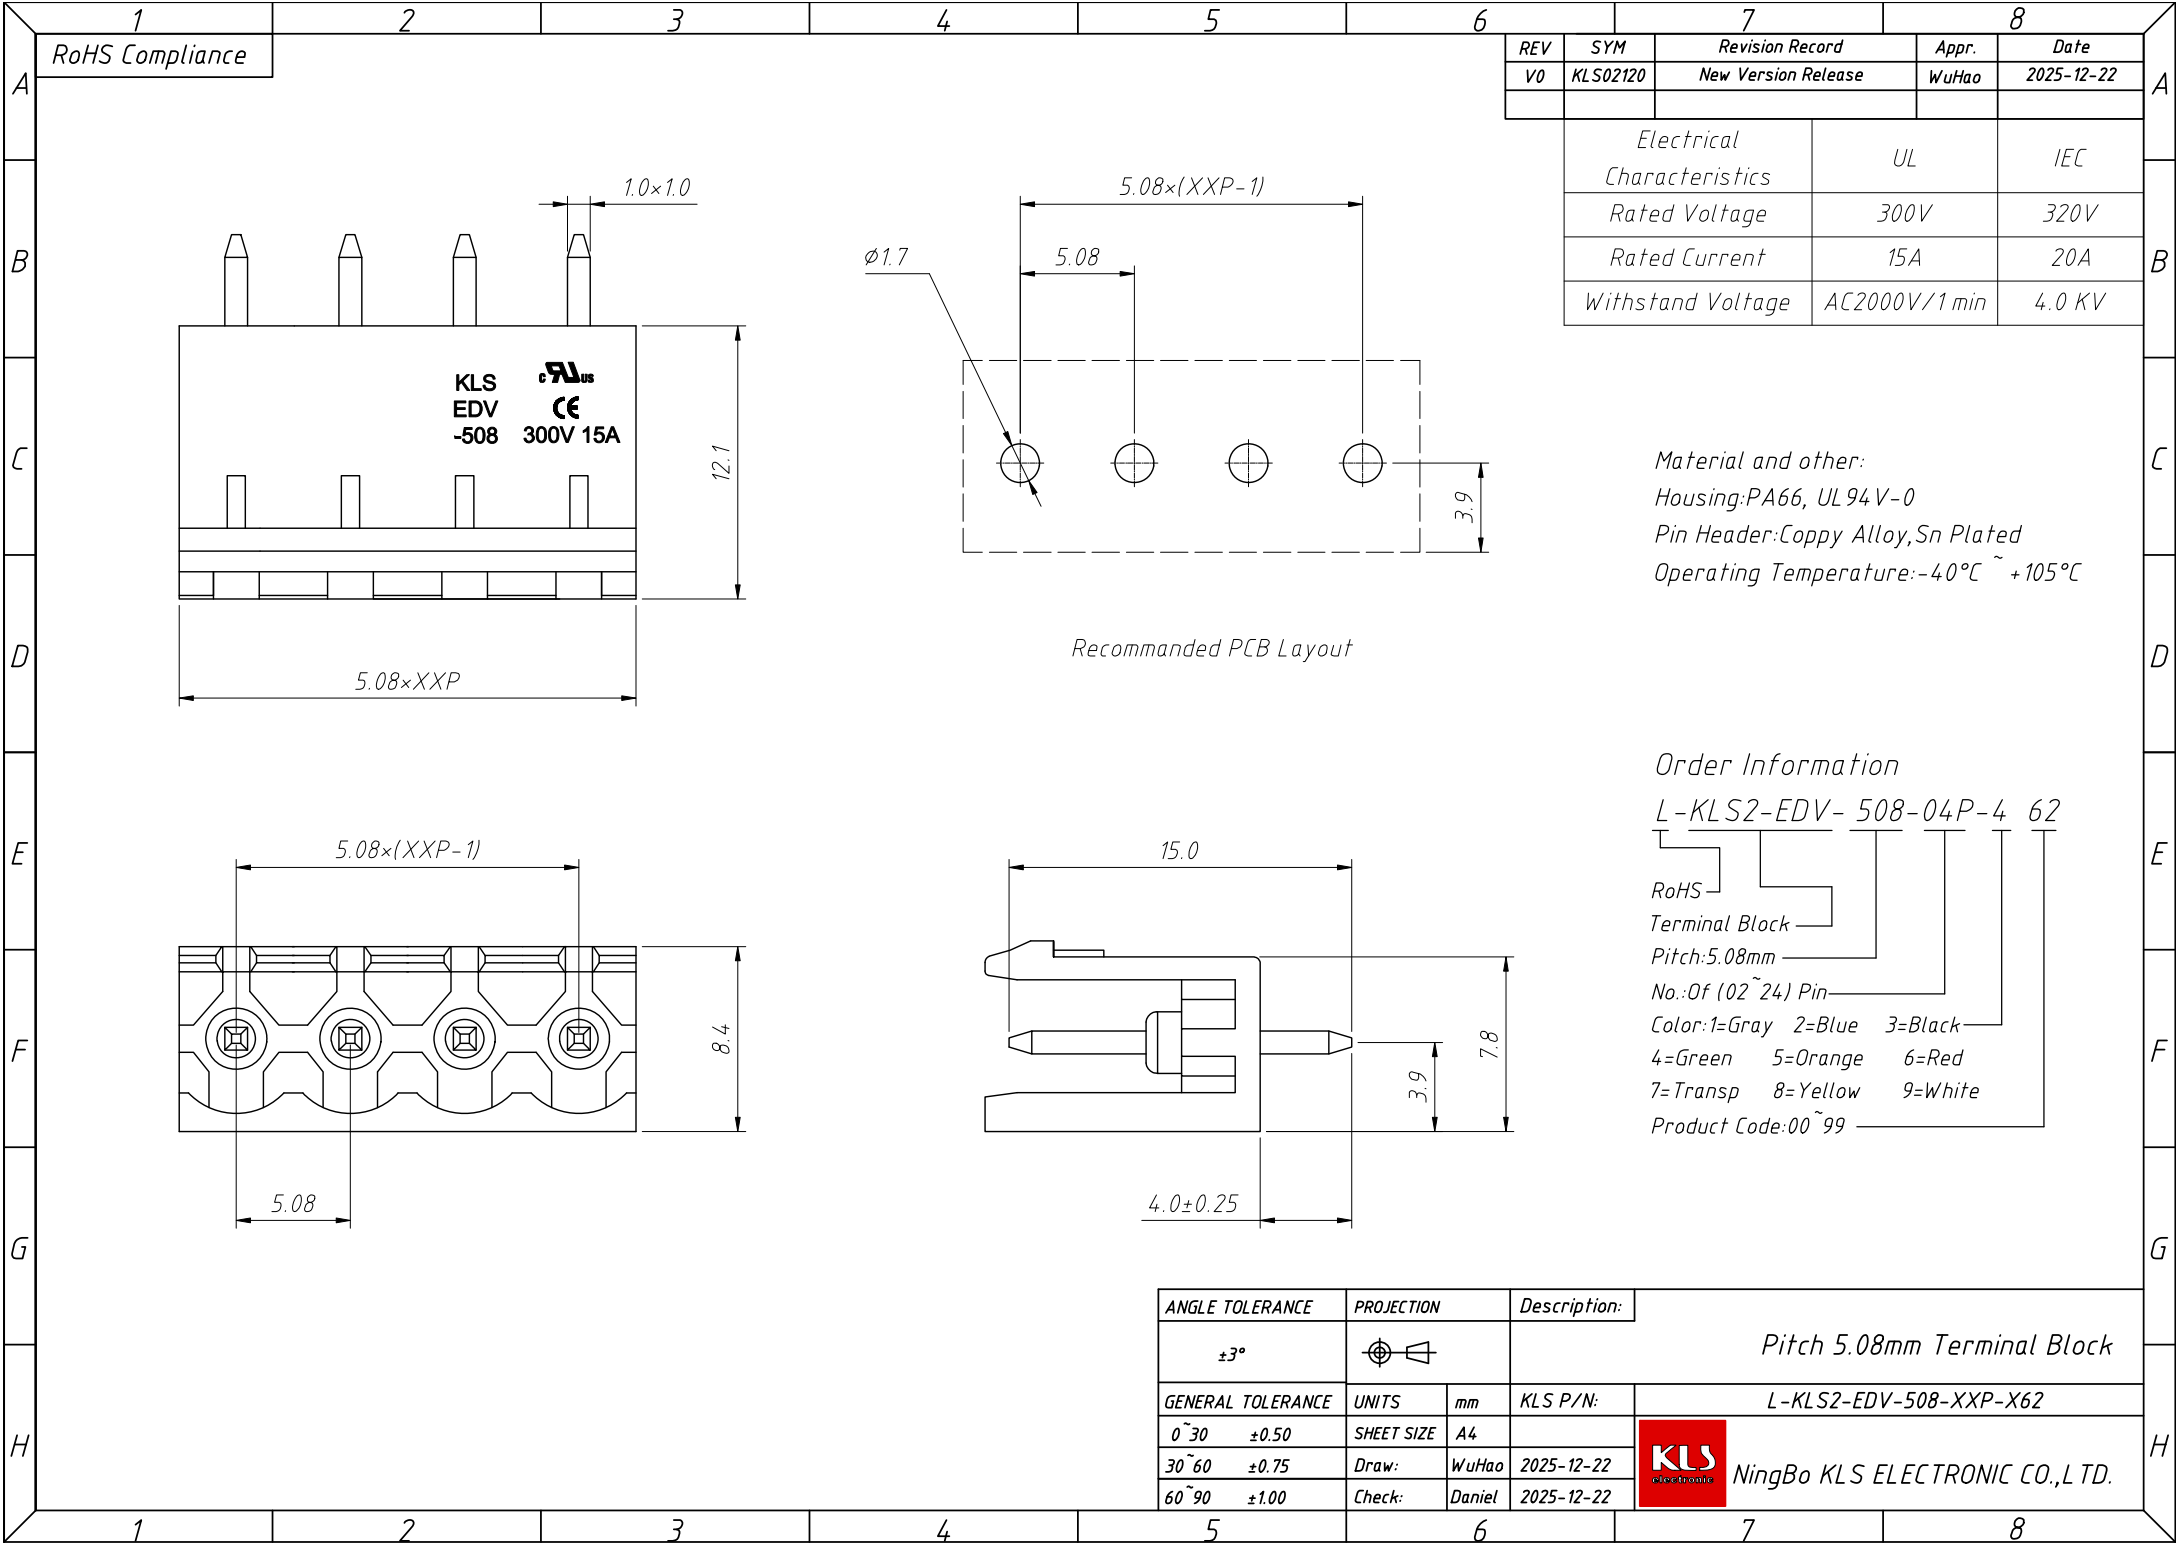

REV		SYM	Revision Record		Appr.	Date
V0		KLS02120	New Version Release		WuHao	2025-12-22
Electrical Characteristics			UL		IEC	
Rated Voltage			300V		320V	
Rated Current			15A		20A	
Withstand Voltage			AC2000V/1 min		4.0 KV	

Material and other:
Housing:PA66, UL 94 V-0
Pin Header:Coppy Alloy,Sn Plated
Operating Temperature:-40℃ ~ +105℃

Order Information
L-KLS2-EDV- 508-04P-4 62
RoHS
Terminal Block
Pitch:5.08mm
No.:Of (02~24) Pin
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Product Code:00~99

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 5.08mm Terminal Block	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
0~30		±0.50	SHEET SIZE	A4	
30~60		±0.75	Draw:	WuHao	2025-12-22
60~90		±1.00	Check:	Daniel	2025-12-22