




Constant Current Driver

Model: CC18W250-400CG 1-10
CC21W350-500CG 1-10
CC33W500-800CG 1-10
CC35W550-850CG 1-10

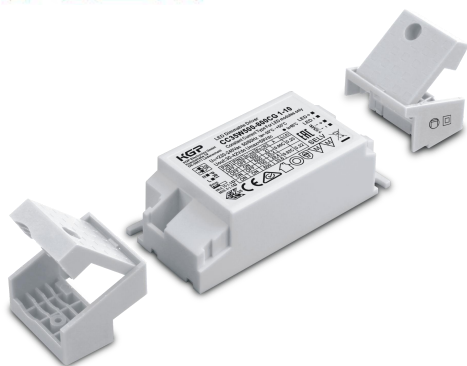

Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
CC18W250-400CG 1-10	250mA	0.10A	13.1W	7.5-10.5W	0.8	80%	30-42V	59V
	300mA	0.12A	15.5W	9-12.6W	0.85	81%		
	350mA	0.12A	18.1W	10.5-14.7W				
	400mA	0.12A	20.7W	12-16.8W				
CC21W350-500CG 1-10	350mA	0.12A	18.1W	10.5-14.7W	0.8	81%		59V
	400mA	0.12A	20.7W	12-16.8W				
	450mA	0.15A	22.7W	13.5-18.9W	0.9	83%		
	500mA	0.20A	25.3W	15-21W				
CC33W500-800CG 1-10	500mA	0.20A	25W	15-21W	0.9	84%	59V	
	600mA	0.20A	30W	18-25.2W				
	700mA	0.22A	34.2W	21-29.4W	0.92	86%		
	800mA	0.22A	39W	24-33.6W				
CC35W550-850CG 1-10	550mA	0.20A	26.2W	16.5-22W	0.9	84%	30-40V	59V
	650mA	0.20A	30.9W	19.5-26W				
	750mA	0.22A	34.9W	22.5-30W	0.92	86%		
	850mA	0.22A	39.5W	25.5-34W				

* Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	1-10V
	Dimming range	10%-100%
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Frequency	50/60Hz

	Input Current	≤0.22A (198VAC, full load)
	Input Power	≤43W (230VAC, full load)
	Power Factor	≥0.92 (230VAC, full load)
	THD	≤20% (230VAC, full load)
	No-load Power Consumption	≤0.5W @230VAC
	Inrush Current :	
	CC18W250-400CG 1-10	≤ 25A/2.4us (230VAC, Full-load)
Output	CC21W350-500CG 1-10	≤ 28A/2.4us (230VAC, Full-load)
	CC33W500-800CG 1-10	≤ 32A/2.8us (230VAC, Full-load)
	CC35W550-850CG 1-10	≤ 33A/2.8us (230VAC, Full-load)
	Connected quantity of 16A Breaker :	
	CC18W250-400CG 1-10	30pcs/type B ; 45pcs/type C @ 230Vac
	CC21W350-500CG 1-10	25pcs/type B ; 40pcs/type C @ 230Vac
	CC33W500-800CG 1-10	25pcs/type B ; 40pcs/type C @ 230Vac
Protection	CC35W550-850CG 1-10	25pcs/type B ; 40pcs/type C @ 230Vac
	Current Accuracy	± 5%
	Max. Output Power	35.7W
	Started Delay Time	≤0.5S (230VAC, full load)
	Current Ripple	± 5% (Imax-Imin) / (Imax+Imin)
	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
Environment	No-load Protection	Auto Recovery
	Insulation voltage	I/P to O/P , 3KVac/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 250 μ A
	Ta/Operation Temperature	18W,21W,33W,35W: -25...+50℃
	Ts/Storage Temperature	-10....+75℃
	Tc/Enclosure Temperature :	75 ℃
Construction	CC18W250-400CG 1-10	
	CC21W350-500CG 1-10	
	Tc/Enclosure Temperature :	85 ℃
	CC33W500-800CG 1-10	
	CC35W550-850CG 1-10	
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
	Connection Method	Push-in Terminal
	Installation	Build-in & Independent
	PRI Wire preparation	0.75-1.5□
	SEC Wire preparation	0.5-1.5□
	Dimension	Independent:137.6*44*30mm (L*W*H) Built in:97.8*44*30mm(L*W*H)

Standards	Certification	complied to CE ENEC SAA
	Safety Standards	EN61347-1:2015,EN61347-2-13:2014/A1:2017,EN62493:2015,AS/NZSIEC61347.2.13:2013,AS/NZS 61347.1:2016
	EMC Standards	EN55015:2013/A1:2015,EN61000-3-2:2014,EN61000-3-3:2013,EN61547:2009
	Performance	EN62384
	Surge	L-N/1KV
Others	RoHS	Complied to 2011/65/EU
	Life Time	50000h @50°C (Ta) / 85°C (Tc)
	Warranty	5years , F.R. <10000ppm
Remark: 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature. 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.		

2. Label



KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheld

LED Dimmable Driver
CC18W250-400CG 1-10
Constant Current Type For LED modules only

UN=220-240Vac 50/60Hz ta=-20°C - +50°C
Uout:30-42Vdc Uout=Max.59Vdc ● tc=75°C

PIN1	PIN2	Io(mA)	Po(W)	λ	IN(A)
OFF	OFF	250	10.5	0.80C	0.10
ON	OFF	300	12.6		
OFF	ON	350	14.7	0.85C	0.12
ON	ON	400	16.8		

8mm
PRI 0.75-1.5
SEC 0.5-1.5
SELV

LED + ■
LED I ■

1-10Vdc

25°C



KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheld

LED Dimmable Driver
CC21W350-500CG 1-10
Constant Current Type For LED modules only

UN=220-240Vac 50/60Hz ta=-20°C - +50°C
Uout:30-42Vdc Uout=Max.59Vdc ● tc=75°C

PIN1	PIN2	Io(mA)	Po(W)	λ	IN(A)
OFF	OFF	350	14.7	0.80C	0.12
ON	OFF	400	16.8		
OFF	ON	450	18.9	0.90C	0.15
ON	ON	500	21		0.18

8mm
PRI 0.75-1.5
SEC 0.5-1.5
SELV

LED + ■
LED I ■

1-10Vdc

25°C

KGP
 KGP Electronics GmbH
 Hueckstraße 19
 DE-58511 Lüdenscheid

LED Dimmable Driver
CC33W500-800CG 1-10
 Constant Current Type For LED modules only

$U_N = 220-240V_{ac}$ 50/60Hz $t_a = -20^{\circ}C - +50^{\circ}C$
 $U_{out} = 30-42V_{dc}$ $U_{out} = Max. 59V_{dc}$ $t_c = 85^{\circ}C$

PIN1	PIN2	I_o (mA)	P_o (W)	λ	I_n (A)
OFF	OFF	500	21	0.90C	0.20
ON	OFF	600	25.2		
OFF	ON	700	29.4	0.92C	0.22
ON	ON	800	33.6		

8mm
 PRI 0.75-1.5
 SEC 0.5-1.5
 LED +
 LED -
 1-10Vdc
 SELV

ENEC 25 CE RoHS REACH

KGP
 KGP Electronics GmbH
 Hueckstraße 19
 DE-58511 Lüdenscheid

LED Dimmable Driver
CC35W550-850CG 1-10
 Constant Current Type For LED modules only

$U_N = 220-240V_{ac}$ 50/60Hz $t_a = -20^{\circ}C - +50^{\circ}C$
 $U_{out} = 30-40V_{dc}$ $U_{out} = Max. 59V_{dc}$ $t_c = 85^{\circ}C$


PIN1	PIN2	I_o (mA)	P_o (W)	λ	I_n (A)
OFF	OFF	550	22	0.90C	0.20
ON	OFF	650	26		
OFF	ON	750	30	0.92C	0.22
ON	ON	850	34		

8mm
 PRI 0.75-1.5
 SEC 0.5-1.5
 LED +
 LED -
 1-10Vdc
 SELV


ENEC 25 CE RoHS REACH

3. Dimension (Unit: mm)

Independent type:

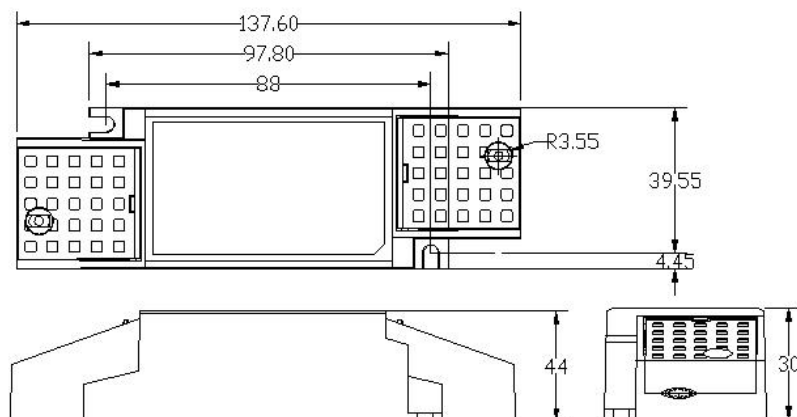

Built in type:

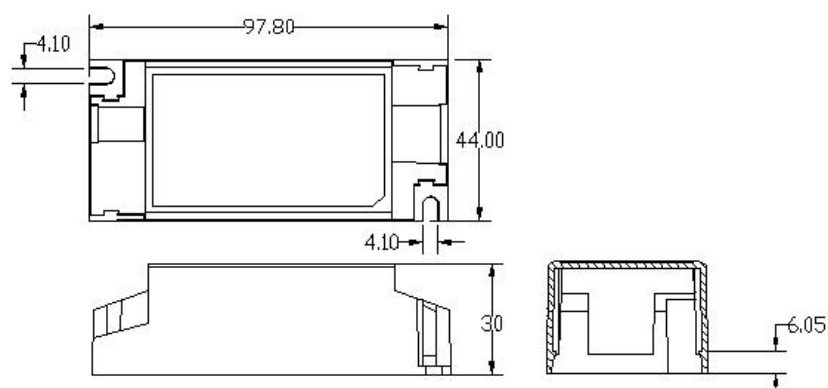


4. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
447*240*200	85	0.1225	10.413	11.163

5. Wiring Diagram

Independent type:

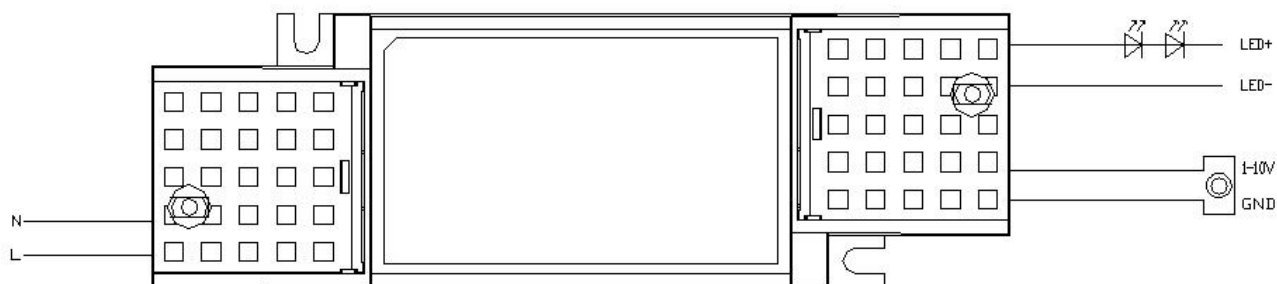

Built in type:

