


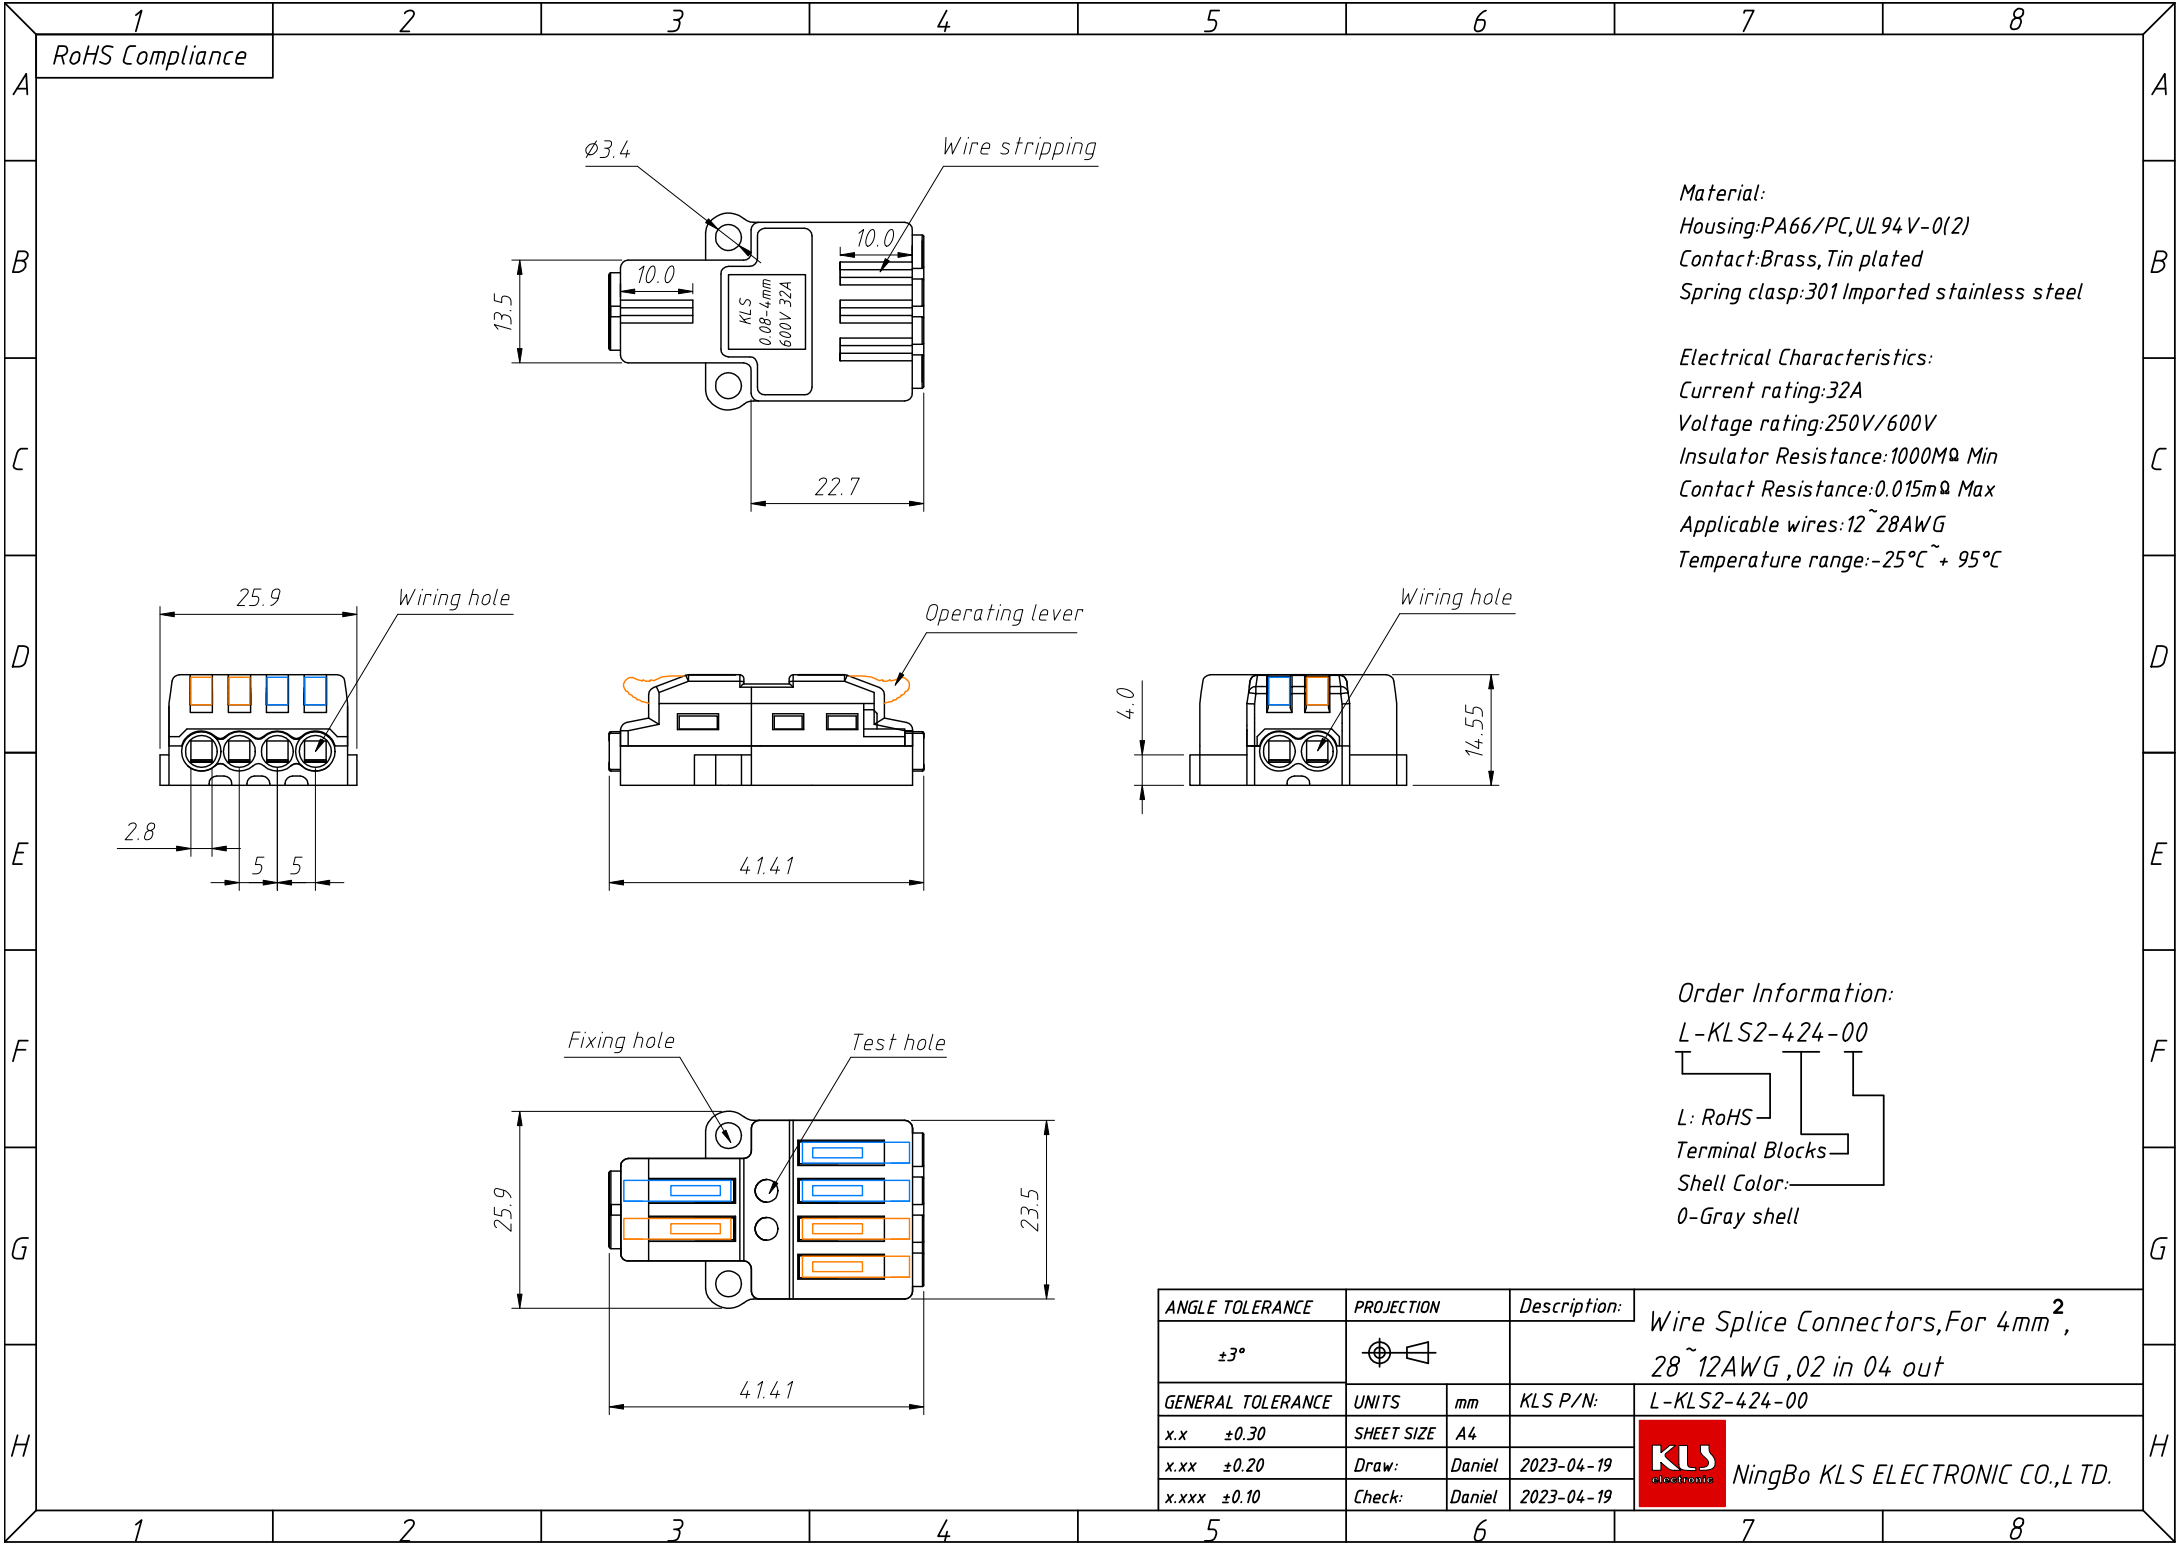

Material:
Housing:PA66/PC,UL 94V-0(2)
Contact:Brass,Tin plated
Spring clasp:301 Imported stainless steel

Electrical Characteristics:
Current rating:32A
Voltage rating:250V/600V
Insulator Resistance:1000M Ω Min
Contact Resistance:0.015m Ω Max
Applicable wires:12~28AWG
Temperature range:-25 $^{\circ}$ C~+95 $^{\circ}$ C

Order Information:

L-KLS2-424-00

L: RoHS

Terminal Blocks

Shell Color:

0-Gray shell

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Wire Splice Connectors,For 4mm ² , 28~12AWG ,02 in 04 out	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-424-00
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2023-04-19	
x.xxx	± 0.10	Check:	Daniel	2023-04-19	



NingBo KLS ELECTRONIC CO.,LTD.