



### ● Dimension & Appearance (Unit:mm)

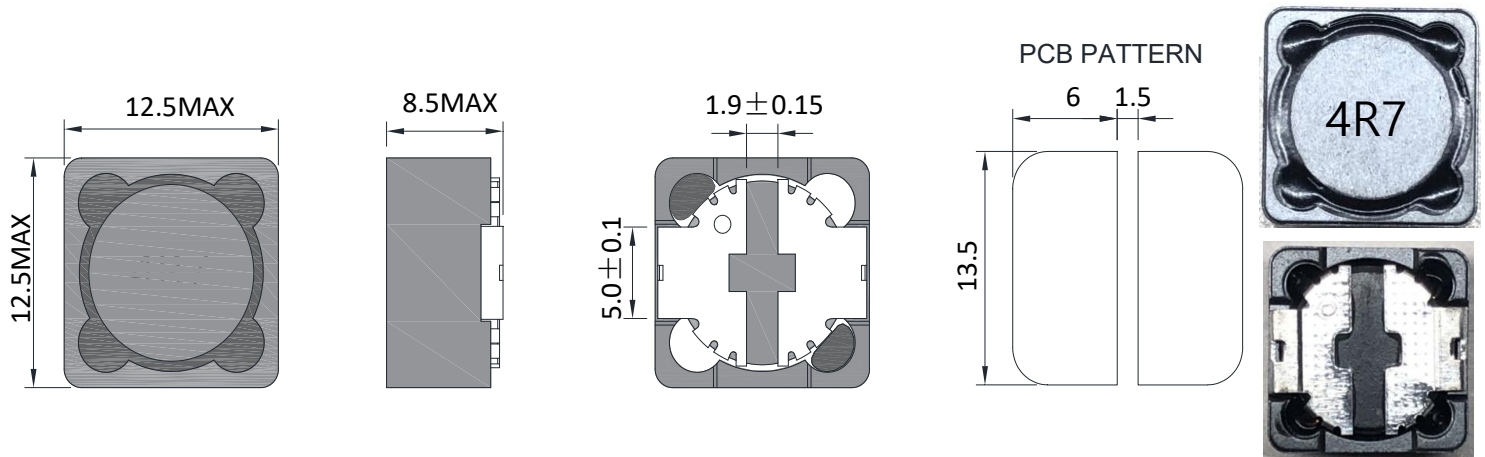

### ● Packing method and dimension and Printing Direction(Unit:mm)

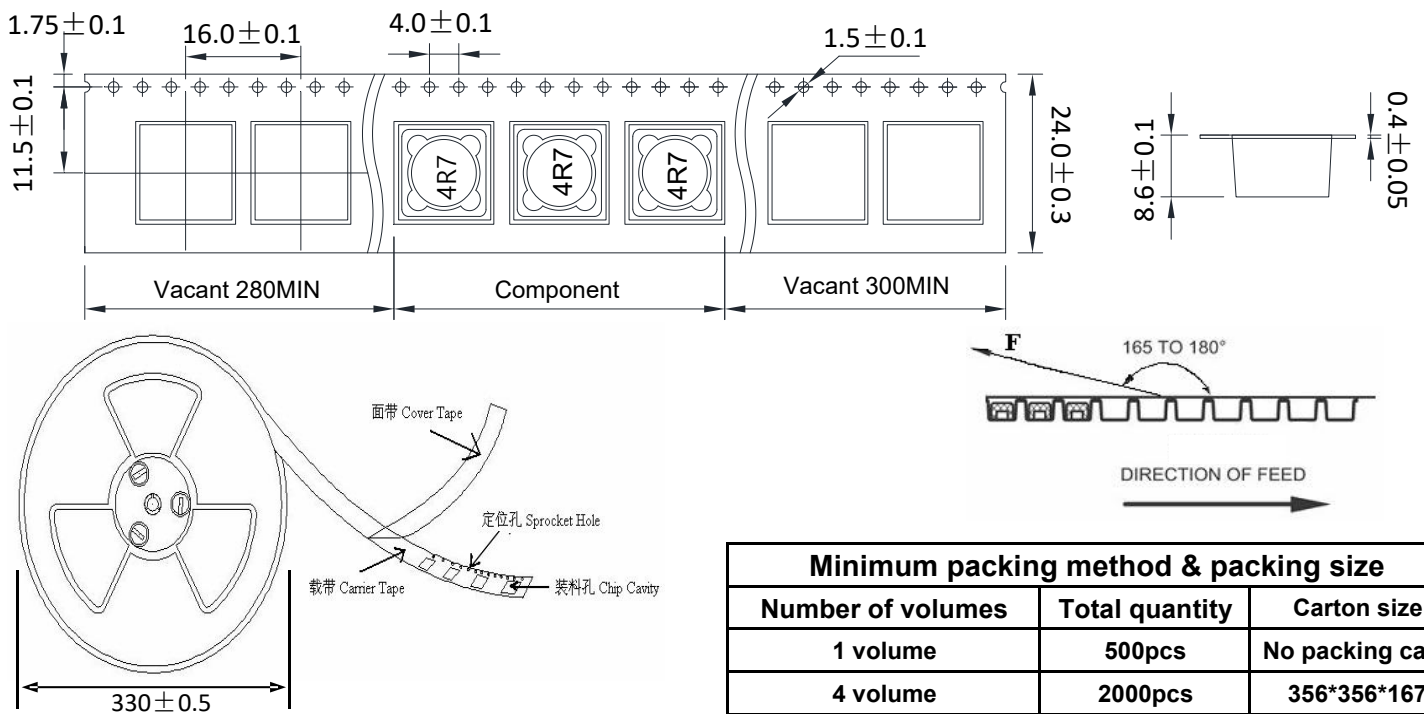

#### Minimum packing method & packing size

| Number of volumes | Total quantity | Carton size     |
|-------------------|----------------|-----------------|
| 1 volume          | 500pcs         | No packing case |
| 4 volume          | 2000pcs        | 356*356*167     |
| 6 volume          | 3000pcs        | 358*358*252     |

### ● Material list

| Item | Material Name      | Material Spec                 |  |
|------|--------------------|-------------------------------|--|
| 1    | Magnetic materials | Ni DR10*7 B6.2 F4.9           |  |
| 2    | Magnetic materials | Ni RI 12.2*6.8*10.85F         |  |
| 3    | Enameled wire      | 2UEW 180℃                     |  |
| 4    | Tin                | Environment-friendly unleaded |  |
| 5    | The packing way    | Concave plastic belt pc       |  |
| 6    | Epoxy              | G500                          |  |
| 7    | Epoxy              | JL700                         |  |
| 8    | Terminal           | SHC-1200B 亮锡                  |  |
| 9    |                    |                               |  |
| 10   |                    |                               |  |

● **Electrical characteristic**

L: 4.7±30% AT 100 (KHz) 0.25 V

DCR: 27 (mΩ)MAX AT 25 °C

IDC: 13 (A)MAX AT 100 (KHz) 0.25 V

|                   | Inductance & Tolerance<br>(UH) | Test Freq<br>(KHz) | Test Vol<br>(V) | DC Resistance Max<br>(mΩ)MAX | Rated DC Current<br>(A)MAX |
|-------------------|--------------------------------|--------------------|-----------------|------------------------------|----------------------------|
| Testing Standards | 4.7±30%                        | 100                | 0.25            | 27                           | 13<br>≥70% Ls              |
| 1                 | 4.35                           | 100                | 0.25            | 20.4                         | OK                         |
| 2                 | 4.32                           | 100                | 0.25            | 20.3                         | OK                         |
| 3                 | 4.26                           | 100                | 0.25            | 19.9                         | OK                         |
| 4                 | 4.35                           | 100                | 0.25            | 19.8                         | OK                         |
| 5                 | 4.32                           | 100                | 0.25            | 20.3                         | OK                         |
| 6                 | 4.34                           | 100                | 0.25            | 20.2                         | OK                         |
| 7                 | 4.31                           | 100                | 0.25            | 20.0                         | OK                         |
| 8                 | 4.35                           | 100                | 0.25            | 20.4                         | OK                         |
| 9                 | 4.29                           | 100                | 0.25            | 20.5                         | OK                         |
| 10                | 4.39                           | 100                | 0.25            | 21.0                         | OK                         |
| X                 | 4.33                           | /                  | /               | 20.3                         | /                          |

**● Reliability Testing Items**


| No. | Items                          | Requirements                                                                                                                                   | Test Methods and Remarks                                                                                                                             |
|-----|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Operating Temperature Range    | -40℃ ~ +125℃                                                                                                                                   | Including self-heating temperature rise.                                                                                                             |
| 2   | Soldering Resistance           | 1.No visible mechanical damage<br>2.Inductance change:within ±10%                                                                              | Dip pads in flux and dip in solder pot (96.5sn/3.0Ag/0.5Cu) at 260±5℃ for 10±1 seconds                                                               |
| 3   | Solderability                  | 90%or more of electrode area shall be coated by new solder                                                                                     | Dip pads in flux and dip in solder pot (96.5sn/3.0Ag/0.5Cu) at 260±5℃ for 5±1 seconds                                                                |
| 4   | Insulation Resistance          | ≥100MΩ                                                                                                                                         | 100V DC between inductor coil and core for 60 seconds                                                                                                |
| 5   | Component Adhesion (Push test) | ≥2.0kgf                                                                                                                                        | Inductors shall be subjected to 260±5℃ for 20±5sec Soldering in the base with 0.3mm solder.And then apply electrode way plus 2.0kgf for ten seconds. |
| 6   | Over loading                   | 1.There shall be no case deformation or change in appearance<br>2.The electrical characteristics of inductor to meet the requirements of spec. | Apply twice as rated current for five minutes between inductor terminals,direct current error ±2%                                                    |
| 7   | Temperature change             | 1.There shall be no case deformation or change in appearance<br>2.Inductance shall not change more than ±10%.                                  | +125℃ 1 hour ↔ -40℃ 1 hour 5 Cycles,Inductors are to be tested after 1 hour at room temperature                                                      |
| 8   | High temperature               | 1.There shall be no case deformation or change in appearance<br>2.Inductance shall not change more than ±10%.                                  | Inductors shall be subjected to +105±5℃ for 96±2 hour,Inductors are to be tested after one hour at room temperature                                  |
| 9   | Low temperature                | 1.There shall be no case deformation or change in appearance<br>2.Inductance shall not change more than ±10%.                                  | Inductors shall be subjected to -40±5℃ for 96±2 hour,Inductors are to be tested after one hour at room temperature                                   |
| 10  | Life                           | 1.There shall be no case deformation or change in appearance<br>2.Inductance shall not change more than ±10%.                                  | Inductors shall be stored at +105±5℃ for 1000 hours with rated current applied, Normal temperature test                                              |

## ● Recommend Soldering Conditions

Applicable soldering process to the products is reflow soldering.

### Soldering Profile

#### (1) Reflow Soldering Profile

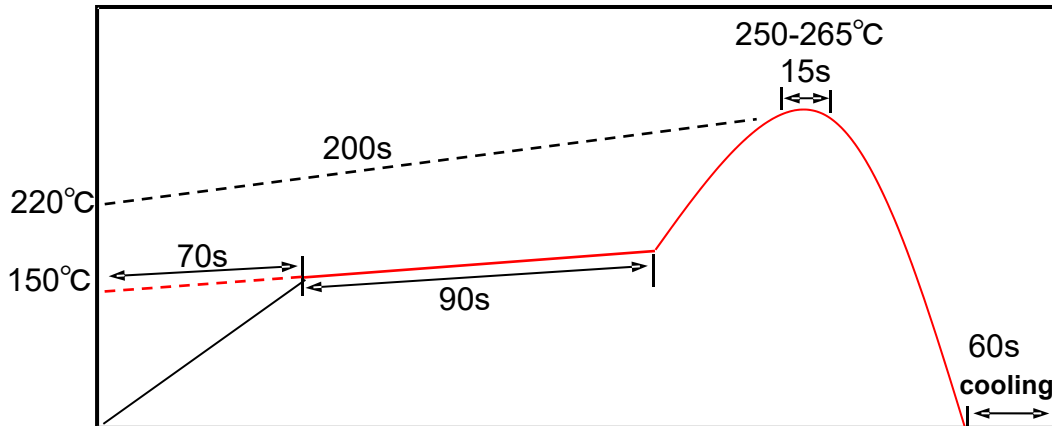

#### (2) Soldering Iron

Reworking with Soldering Iron must preheating at 150°C for 1 minute is required, and do not directly touch the core with the tip of the soldering iron. The reworking soldering conditions are as follows:

- ① Temperature of soldering iron tip: 350°C;
- ② Soldering iron power output: 30W max.
- ③ Diameter of soldering iron end: 1.0mm max.
- ④ Soldering time: within 3 sec.



## ● Storage Requirements

### ( 1 ) Storage Period

To maintain the solderability of terminal electrodes and to keep the packing material in good condition, product should be used within 6 months from the time of delivery. And the solderability of products electrodes may decrease as time passes, so in case of storage over 6 months, solderability shall be checked before actual usage.

### ( 2 ) Storage Conditions

( 1 ) Store products in a warehouse in compliance with the following condition:

Temperature: - 10 to +40°C Humidity: 30~70%RH

(2) Do not subject products to rapid changes in temperature and humidity.

(3) Do not store the products in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas, that will causes poor solderability and corrosion of inductors.

(4) Do not store products in bulk packaging to prevent collision among inductors which causes core wire breakage.chipping and

(5) Store products on pallets to protect from humidity, dust, etc.

(6) Avoid heat shock, vibration, direct sunlight, etc.