

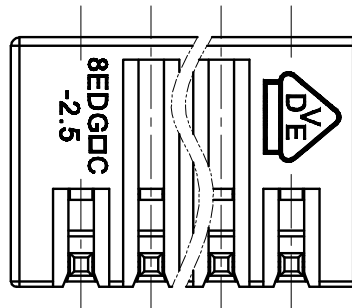
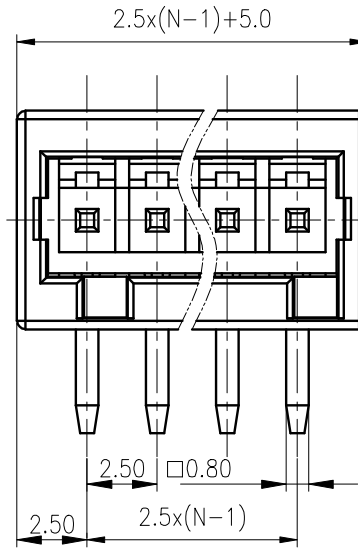
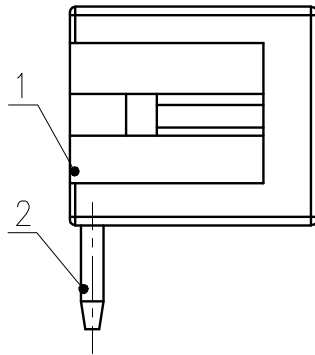


PCB LAYOUT

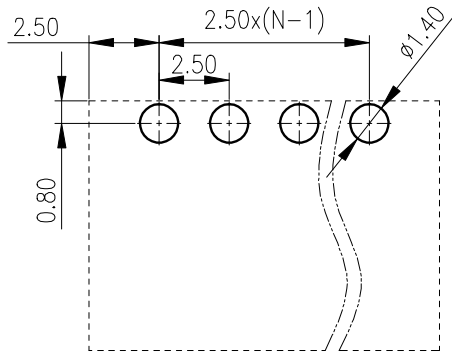

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

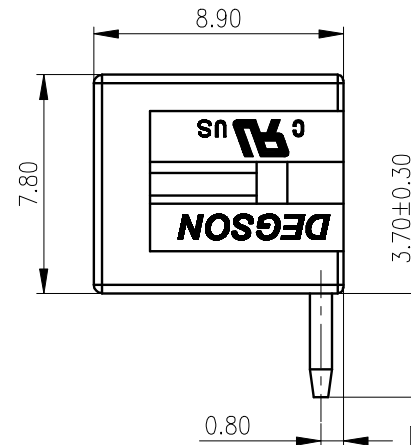

2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		150/4	150/4
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等		III/3	III/2
级/Pollution Degree			II/2
额定电压/电流/Rated Voltage(V)/Current(A)		130/6	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	/
间距/Pitch(mm)/线数范围/Poles		2.50	N=02~12P
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		PANTONE 7534U	
PANTONE / RAL			

MATERIAL: /	SURFACE: /		
MAT NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: /	NAME: 8EDGRC-2.5-XXP-11-01A(H)		
CHKD: /			
DRFT:ChenZhM 2020.03.20	DRAWING NO.: 10001567		REV TO
① ②	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 4:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE