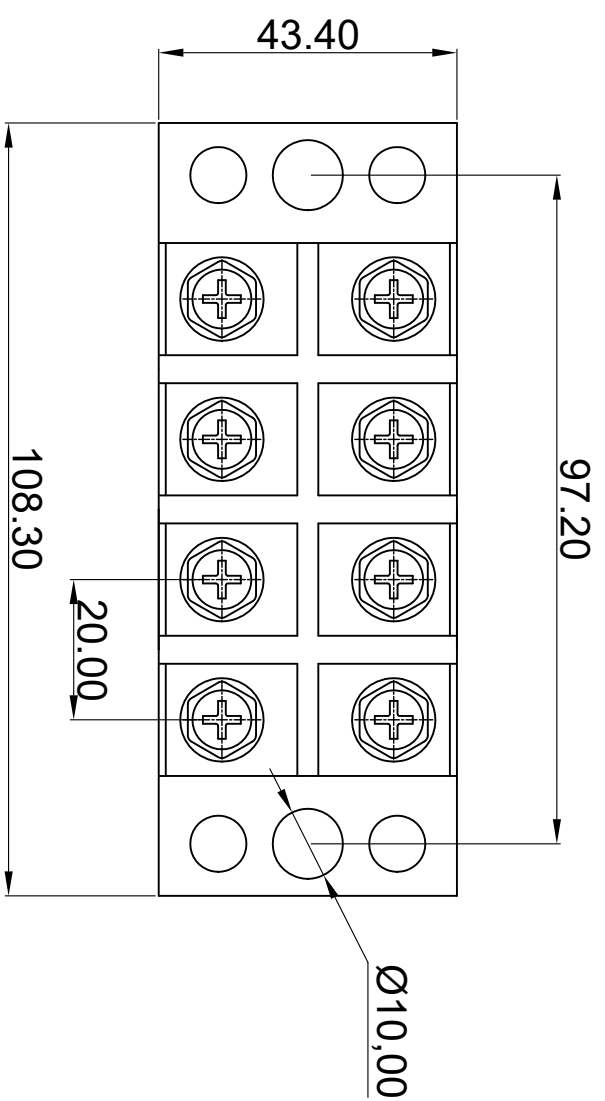


Technical Data:
Section(mm²): 0.5-25
Rated voltage(V): 660V
Insulation voltage(V): 660V
Rated current(A): 100A
Electrical clearance(mm): ≥8
Creepage distance(mm): ≥10
Torque(N.m): 4.4-6.6
Working ambient temperature: -40℃~+80℃
Connection method: Screw connection

Insulation material: PC black
Dust cover: PVC
Conductive body: Copper / Steel (-T)
Flame retardant grade: UL94 V-2

Total Pitch Tolerances										Nominal dimension range										—	//
in mm										in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over		
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10		
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	all	0	over
±0.18±0.20±0.25±0.3	±0.35±0.44±0.50±0.70±0.85±0.20±0.25±0.30±0.35±0.44±0.55±0.70±0.80±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5													

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.		DATE /			
CHK.		DATE			
APP.		DATE			
KEEN SIDE					
			SCALE	1:5:1	
			NAME	KSE-TB-1004 (-T)	
			DWGNO.		