


未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500 ~2.50	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

PCB LAYOUT

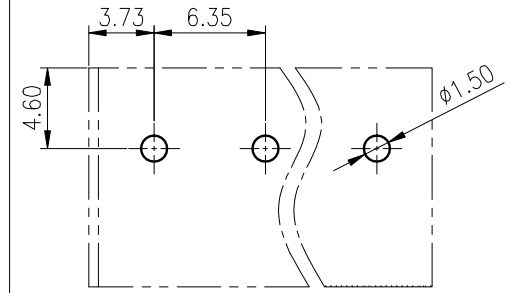

A

A

B




B

C

C

D

D

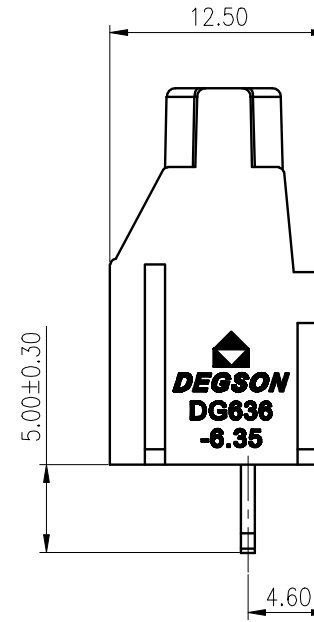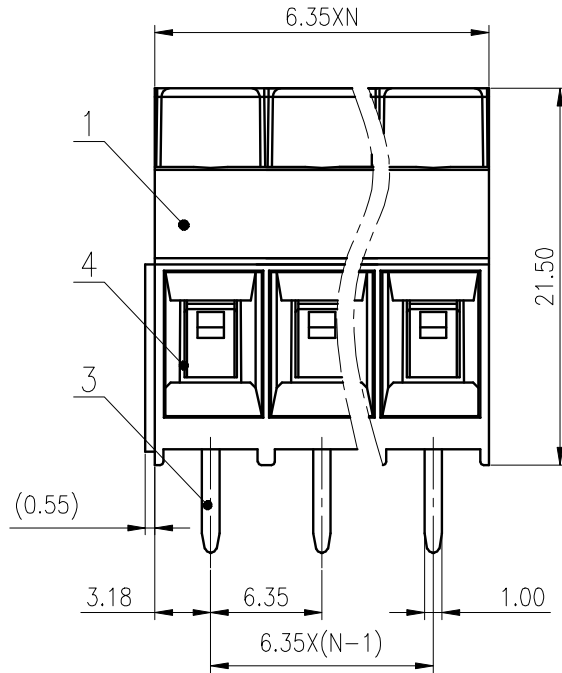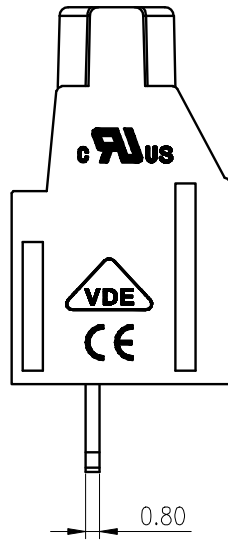

4	Cage	Copper alloy	M3/Ni Plated
3	Pin header	Copper alloy	Sn Plated
2	Screw	Steel	M3/Zn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard: B C D

额定电压/电流/Rated Voltage(V)/Current(A) 300/30 / 300/10

IEC 标准/IEC Standard: III/3 III/2 II/2

过压类别/Overvoltage Category/污染等级/Pollution Degree

额定电压/电流/Rated Voltage(V)/Current(A) / 450/24 /

工频耐压/Withstanding Voltage(KV/1Min) / 2.5 /

螺丝扭矩/Torque Tightening(N·m/Lb.in) M3, 0.5/4.43

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 1.5~4.0/26~10

间距/Pitch(mm)/线数范围/Poles 6.35/N=02~16P

剥线长度/Stripping length(mm) 7~8

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: Lan ChH 2020.03.18 NAME:

CHKD: /

DRFT: Yu JZh 2020.03.18

DRAWING NO.: DG636-6.35-C01 REV TO

TYPE: CUSTOMER DRAWING SCALE:2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE:2.5:1	SHEET	1/1
-----	-----	-------------	------	------	----------	--------------	------------------------	-------------	-------	-----