


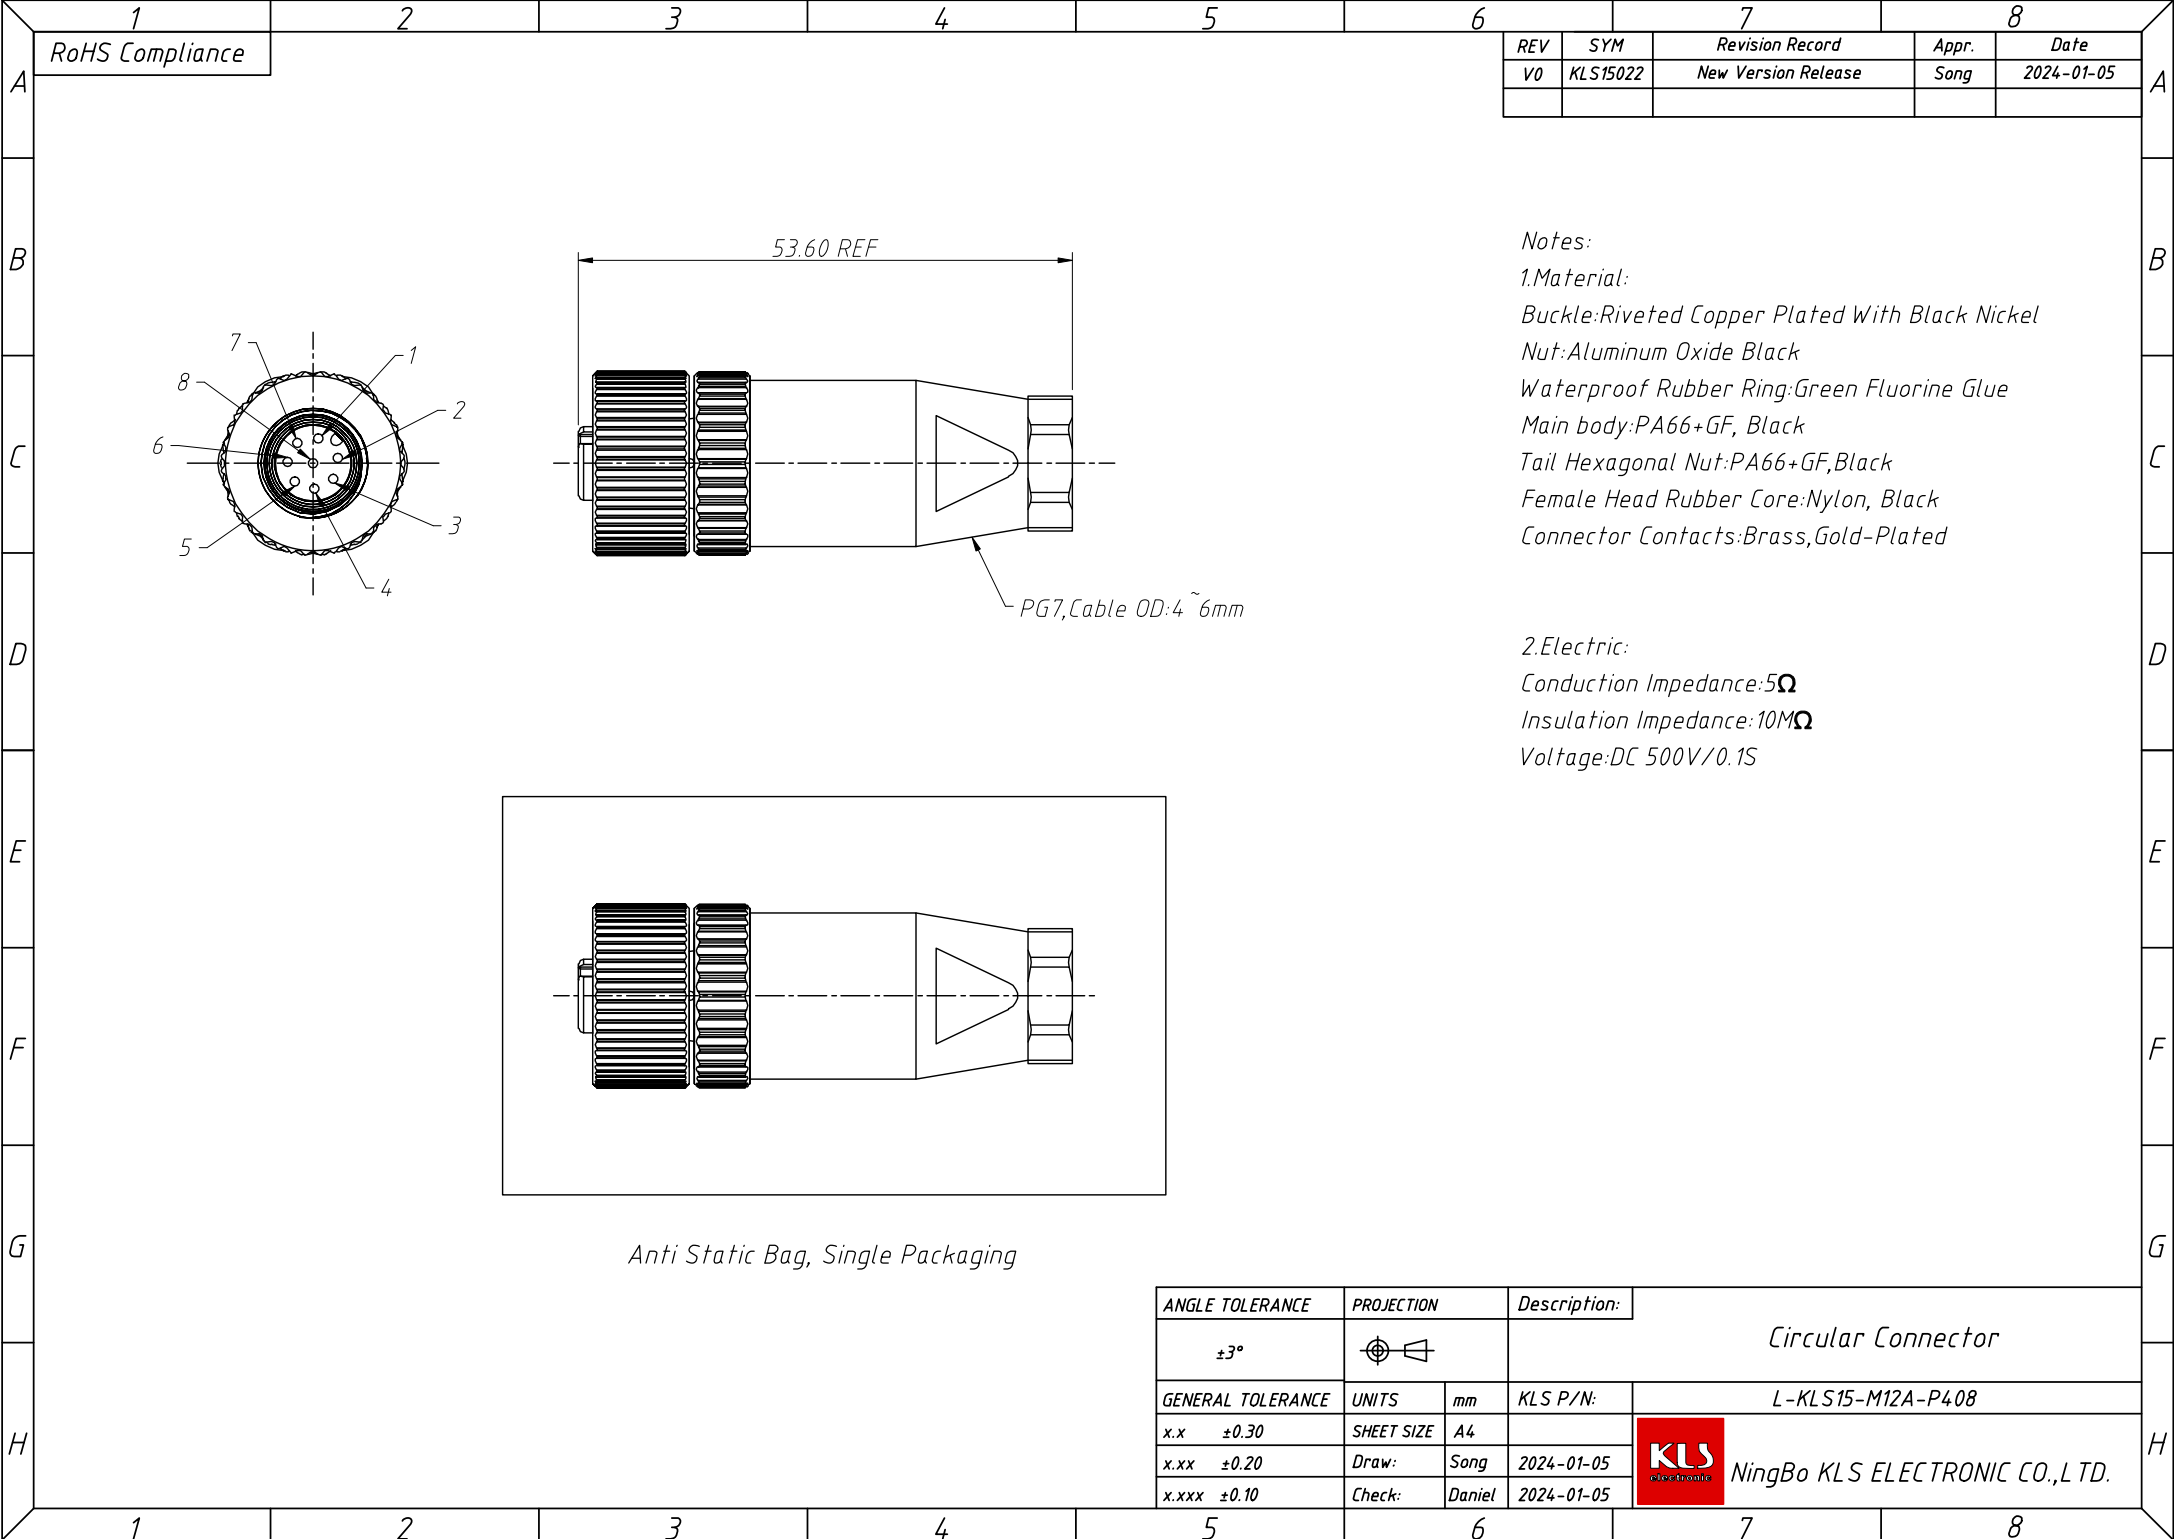

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS15022	New Version Release	Song	2024-01-05

Notes:

1.Material:

Buckle:Riveted Copper Plated With Black Nickel

Nut:Aluminum Oxide Black

Waterproof Rubber Ring:Green Fluorine Glue

Main body:PA66+GF, Black

Tail Hexagonal Nut:PA66+GF,Black

Female Head Rubber Core:Nylon, Black

Connector Contacts:Brass,Gold-Plated

2.Electric:

Conduction Impedance:5Ω

Insulation Impedance:10MΩ

Voltage:DC 500V/0.1S

PG7,Cable OD:4~6mm

53.60 REF

Anti Static Bag, Single Packaging

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Circular Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS15-M12A-P408
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Song	2024-01-05	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2024-01-05	