

SS32 (SS32A) THRU SS320 (SS320A)

Surface Mount Schottky Rectifier

● Essential information; basic information

Features


- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

Mechanical Data

- Package: DO-214AC (SMA)
- Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Cathode line denotes the cathode end

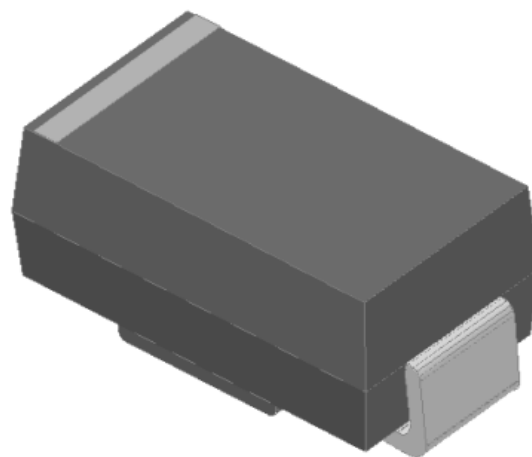


● Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS32	SS34	SS36	SS38	SS310	SS315	SS320
Alternate Name			SS32A	SS34A	SS36A	SS38A	SS310A	SS315A	SS320A
Maximum Repetitive peak reverse voltage	VRRM	V	20	40	60	80	100	150	200
Average rectified output current@60Hz sine wave, resistance load, TL (Fig.1)	IO	A	3.0						
Forward Surge Current (Non-repetitive)@60Hz Half-sine wave,1 cycle, Tj=25℃	IFSM	A	70						
Storage temperature	Tstg	℃	-55 ~ +150						
Junction temperature	Tj	℃	-55 ~ +125		-55 ~ +150				
Maximum instantaneous forward voltage drop per diode	VF (IFM=3.0A)	V	0.6		0.7	0.85		0.95	
Maximum DC reverse current at rated DC blocking voltage per diode @VRM=VRRM	IR (Tj =25℃)	mA	0.5			0.1			
	IR (Tj =100℃)		10			5			

PARAMETER	SYMBOL	UNIT	SS32	SS34	SS36	SS38	SS310	SS315	SS320
Alternate Name			SS32A	SS34A	SS36A	SS38A	SS310A	SS315A	SS320A
Typical Thermal resistance	R _{θJ-A}	°C/W	55						
	R _{θJ-L}		17						

Note: (1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas


Characteristics (Typical)

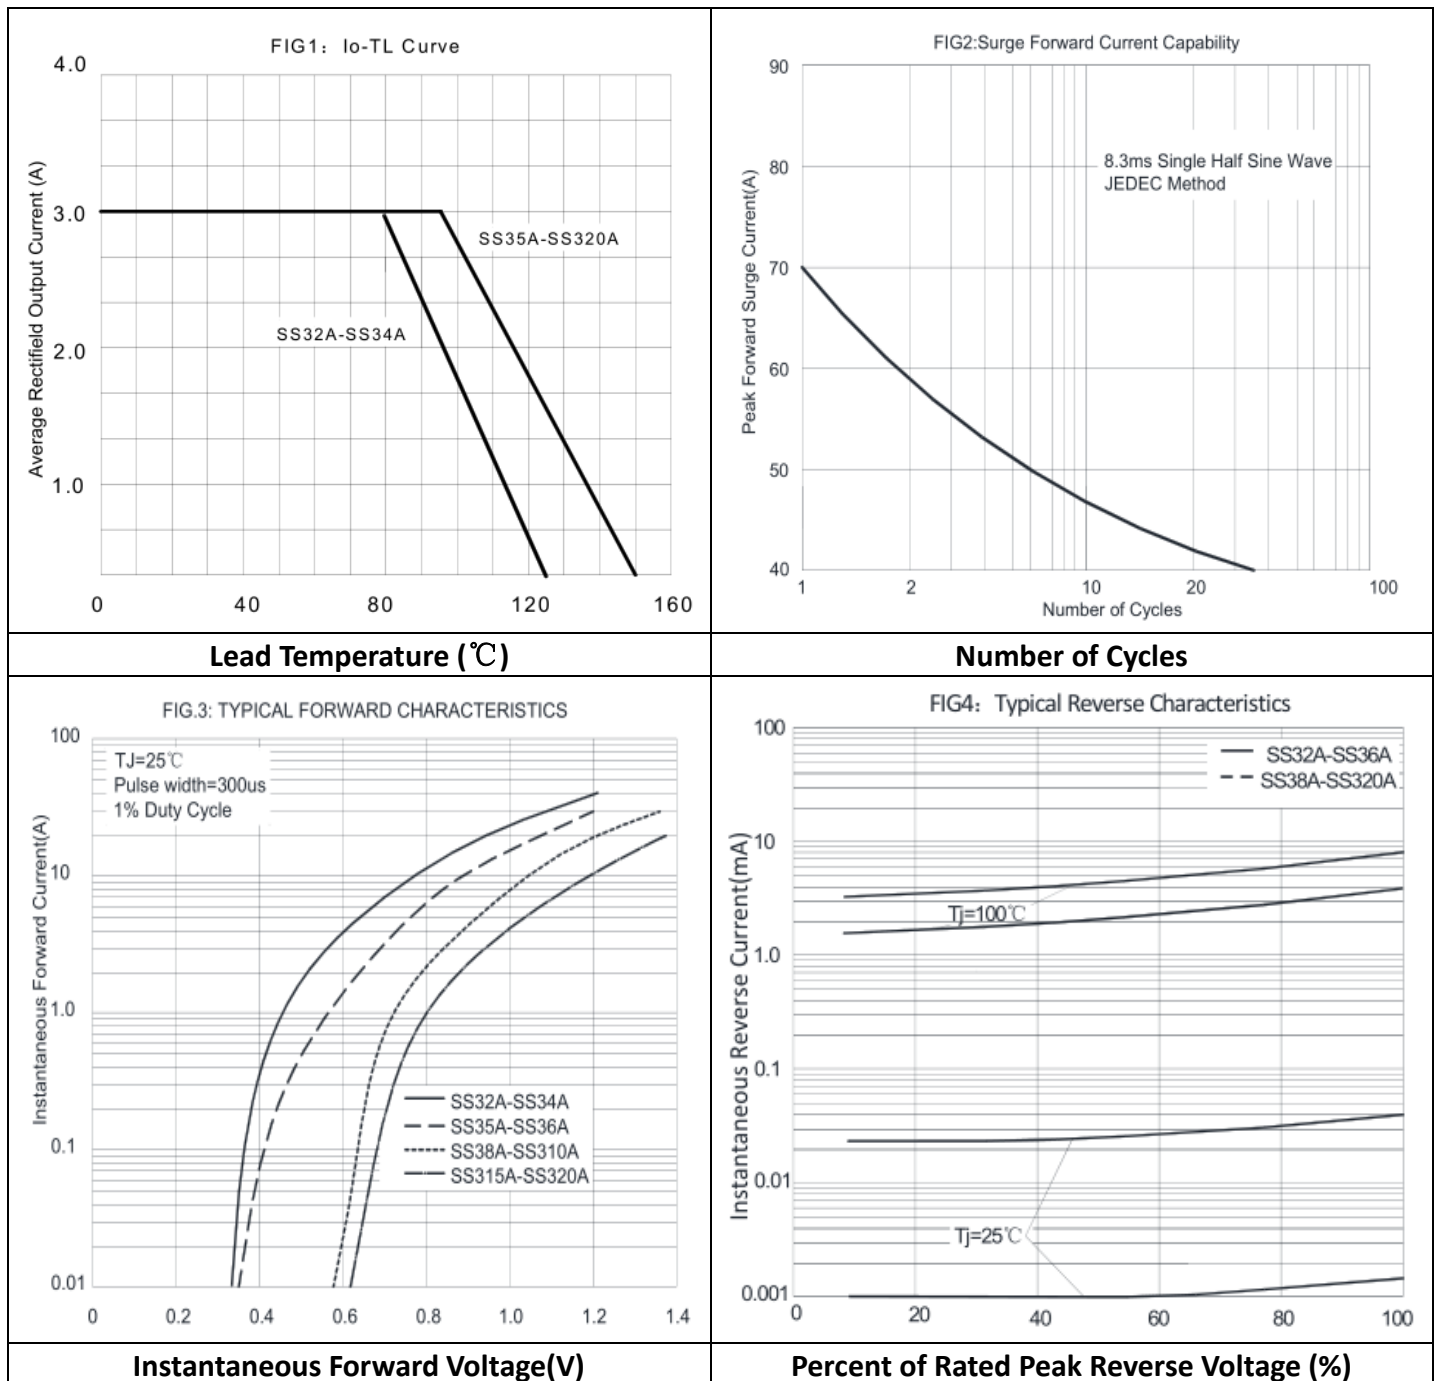

● Ordering Information (Example)

type specification	manner of packin	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS32-SS320 (SMA)	T/B	2000	10000	100000	7" reel
		5000	10000	100000	11" reel
		5000	10000	100000	13" reel

● Outline Dimensions

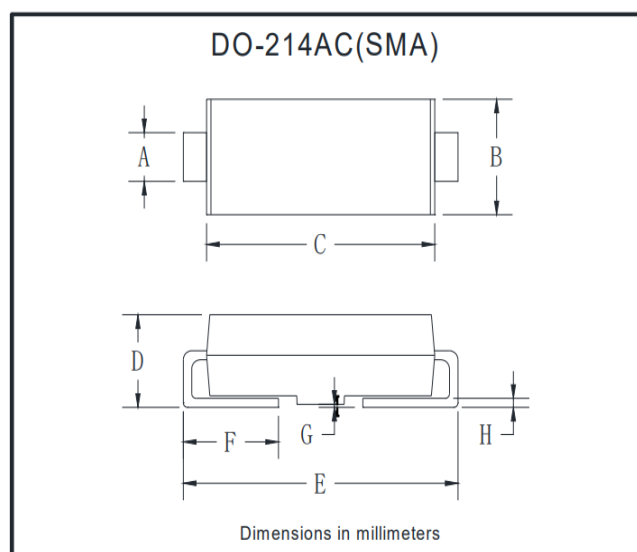

DO-214AC(SMA)		
Dim	Min	Max
A	1.25	1.58
B	2.40	2.83
C	4.06	4.75
D	1.90	2.30
E	4.93	5.28
F	0.76	1.41
G	0.08	0.20
H	0.15	0.31

● Disclaimer

The information presented in this document is for reference only. right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Chenglitai or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. or consult your nearest chenglitai's sales office for further assistance.