

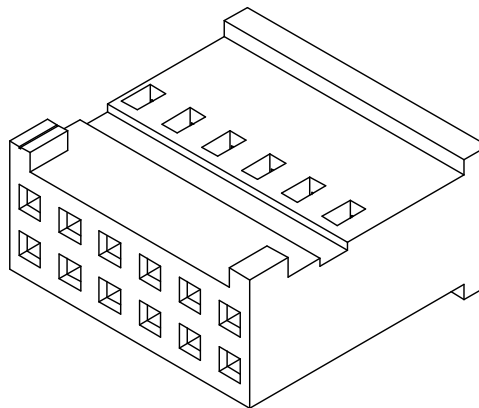
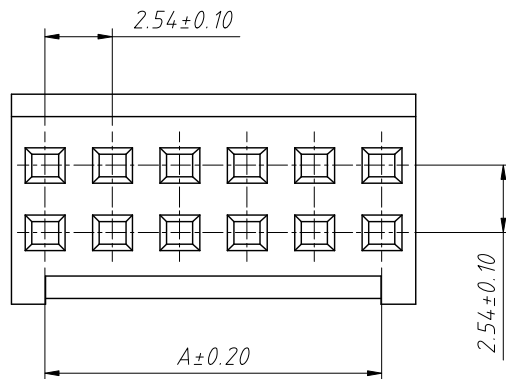


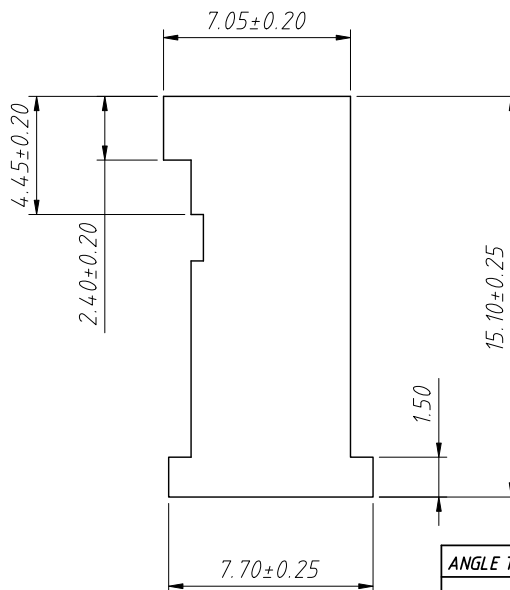

Material:  
Housing:PA66,UL 94 V-0,Black

Electrical Characteristics:  
Rated Current:3.0AMP  
Voltage rating:250V AC,DC  
Temperature range:-45℃~ + 105℃  
Insulator Resistance:1000MΩ Min  
Withstanding Voltage:1000V AC/minute  
Contact Resistance:20mΩ Max

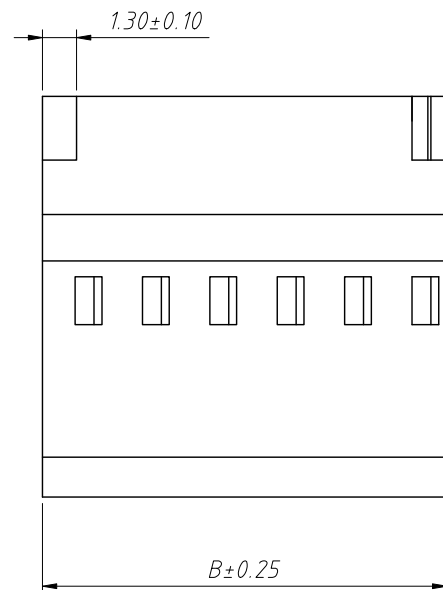

| Pin  | Dimensions(mm) |       |
|------|----------------|-------|
|      | A              | B     |
| 2×02 | 2.54           | 5.08  |
| 2×03 | 5.08           | 7.62  |
| 2×04 | 7.62           | 10.16 |
| 2×05 | 10.16          | 12.70 |
| 2×06 | 12.70          | 15.24 |
| 2×07 | 15.24          | 17.78 |
| 2×08 | 17.78          | 20.32 |
| 2×09 | 20.32          | 22.86 |
| 2×10 | 22.86          | 25.40 |
| 2×12 | 27.94          | 30.48 |
| 2×15 | 35.56          | 38.10 |
| 2×18 | 43.18          | 45.72 |

Order Information:  
L-KLS1-TE-2.54-2-XX-H

L: RoHS  
Pitch:2.54mm  
Row:  
1-Single layer  
2-Double layer  
XX-No. of 02~18 pins  
Type:  
H / HK-Housing T-Terminal  
S-Straight male pin  
R-Right angle male pin

| ANGLE TOLERANCE   | PROJECTION |        | Description:                         |                                |
|-------------------|------------|--------|--------------------------------------|--------------------------------|
| ±3°               |            |        | 2.54mm Pitch Wire To Board Connector |                                |
| GENERAL TOLERANCE | UNITS      | mm     | KLS P/N:                             | L-KLS1-TE-2.54-2-XX-H          |
| x.x ±0.30         | SHEET SIZE | A4     |                                      |                                |
| x.xx ±0.20        | Draw:      | Daniel | 2021-01-11                           | NingBo KLS ELECTRONIC CO.,LTD. |
| x.xxx ±0.10       | Check:     | Daniel | 2021-01-11                           |                                |