



Constant Current Driver

Model: LC40W200-350



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
LC40W200-350	200mA	0.13A	26W	10.0-23.0W	0.93	89%	50- 1 15V	250V
	250mA	0.16A	32W	12.5-28.8W	0.93	90%		
	300mA	0.19A	39W	15.0-34.5W	0.94	90%		
	350mA	0.22A	45W	17.5-40.3W	0.94	91%		

* Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Output Features	Non- isolation
	IP Grade	IP20
	Insulation Class	Class I
Input	Rated Input Voltage	220-240V
	Range of AC Input Voltage	198-264VAC
	Range of DC Input Voltage	176-280VDC
	Frequency	0/50-60Hz
	Power Factor	≥0.94 (230VAC, full Load, see graphs)
	THD	≤20% (230VAC, full Load, see graphs)
	No-load Power Consumption	≤0.5W @230VAC
Output	Current Accuracy	±5%
	Max. Output Voltage	250V
	Started Delay Time	≤0.5S (230VAC , full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin) / (Imax+Imin)
	PstLM	≤1
	SVM	≤0.4

	Emergency output coefficient	1
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	Insulation voltage	O/P to PE , 1.5KVac/1 min I/P to PE , 1.5KVac/1 min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 700μA
Environment	Ta/ Operation Temperature	-20 ...+55C
	Ts/ Storage Temperature	-30....+85C
	Tc/ Enclosure Temperature	7 5 C
	Humidity	10%....90%RH
	Atmosphere	86- 108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Build-in
	PRI Wire preparation	0.5- 1.5□
	SEC Wire preparation	0.5- 1.5□
	Dimension	165*30*21mm (L*W*H)
Standards	Certification	CE 、 ENEC 、 EAC 、 UKCA 、 SAA
	Safety Standards	EN61347- 1:2015 EN61347-2- 13:2014/A1:2017 EN62384:2006/A1:2009 EN62493:2015 AS61347.2. 13:2018 AS/NZS61347 . 1:2016 Inc A1
	EMC Standards	EN IEC 55015:2019 EN61547:2009 EN IEC 61000-3-2:2019 EN 61000-3-3:2013/A1:2019
	Performance	EN62384
	Surge	L-N: 1KV; L/N-PE:2KV;
Others	RoHS	Complied to 2011/65/EU
	Life Time	50000h
	Warranty	5 years

Remark:

- 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25C ambient temperature.
- 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.

2. Output Current Setting

Output Current	Dial 1	Dial 2
350mA	ON	ON
300mA	OFF	ON
250mA	ON	OFF
200mA	OFF	OFF

3. Connected quantities of different current Breaker

TYPE	LC40W200-350 Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B		33	43	53	67	83	@230VAC	18	160us
TYPE C		53	69	85	107	133			
TYPE D		85	111	137	171	213			

4. Label

☐
☐ N
 ☐ L

KGP
 KGP Electronics GmbH
 Hueckstraße 19
 DE-58511 Lüdenscheid
LED Driver
LC40W200-350
 Constant Current Type


PIN1	PIN2	I _{rated} (mA)	P _{rated} (W)	U _{rated} (V)	U _N /f _N	I _N (A)	t _a (°C)	λ
OFF	OFF	200	23.0	50-115	220-240V 0/50-60Hz	0.13	-20...+55	0.93C
ON	OFF	250	28.8			0.16		0.93C
OFF	ON	300	34.5			0.19		0.94C
ON	ON	350	40.3			0.22		0.94C

U_{out} : Max.250VDC For LED modules only Made in China


tc=75°C

wire preparation

5. Lifetime curve

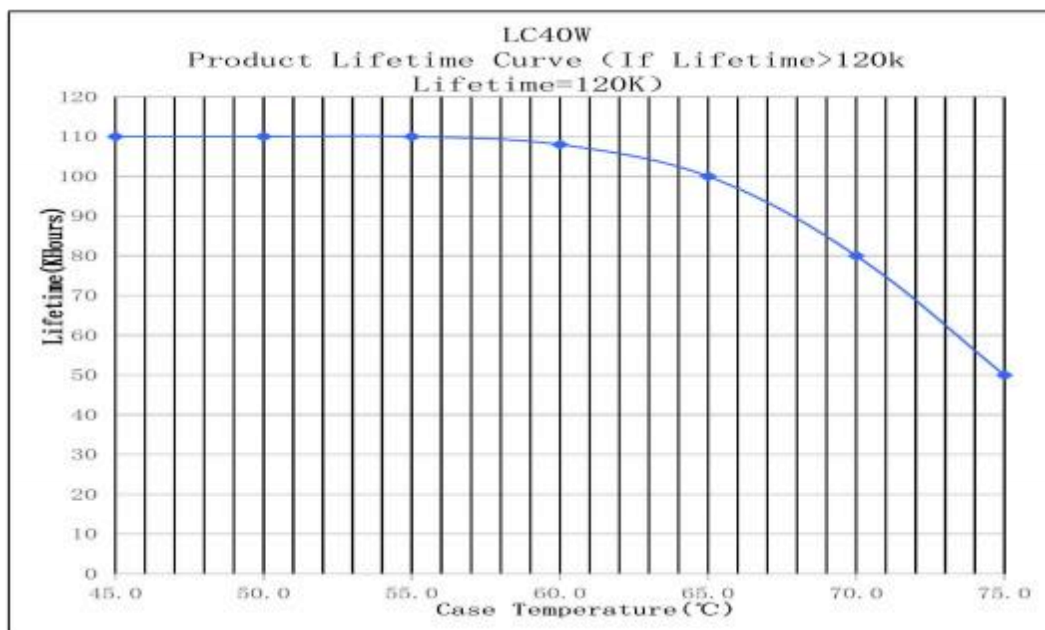


6. Dimension (Unit: mm)

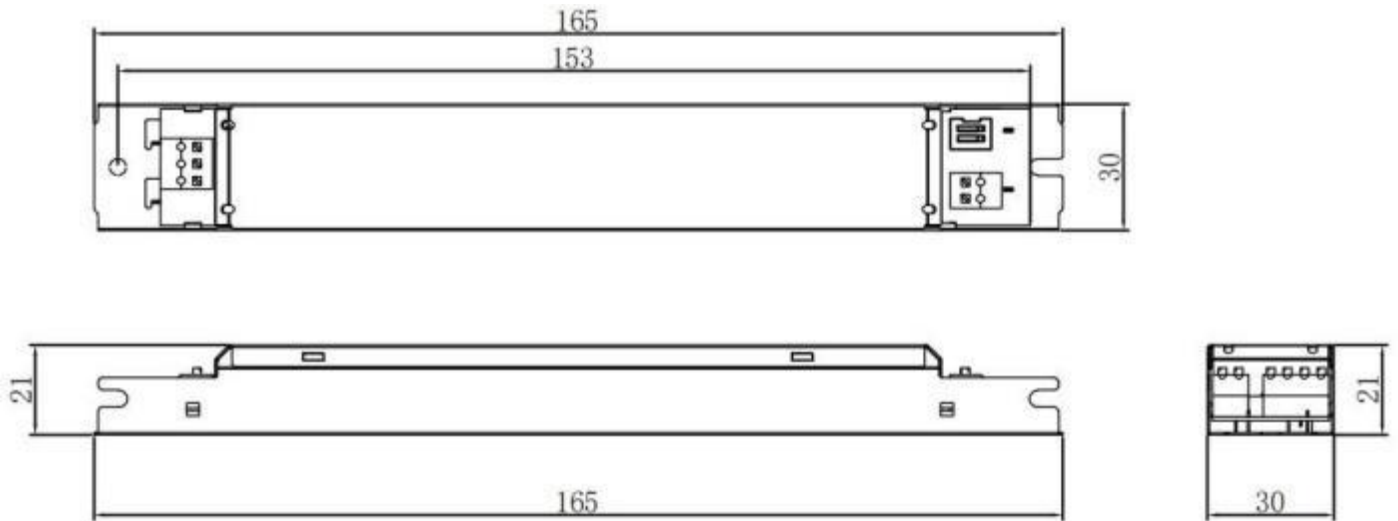

7. Packing information

Carton L*W*H(mm)	Pcs/ Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
410*270*160MM	60PCS	T.B.D	T.B.D	T.B.D

8. Wiring Diagram

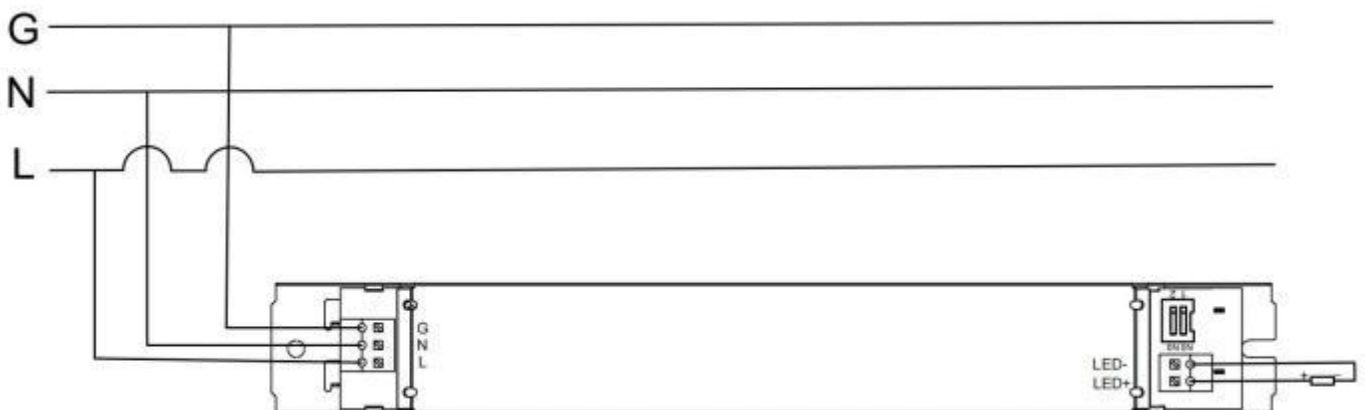

9 . Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.

10. REVISION HISTORY

DATE	REV.	REMARK
2023-3- 1	V1.0	Initial release.