


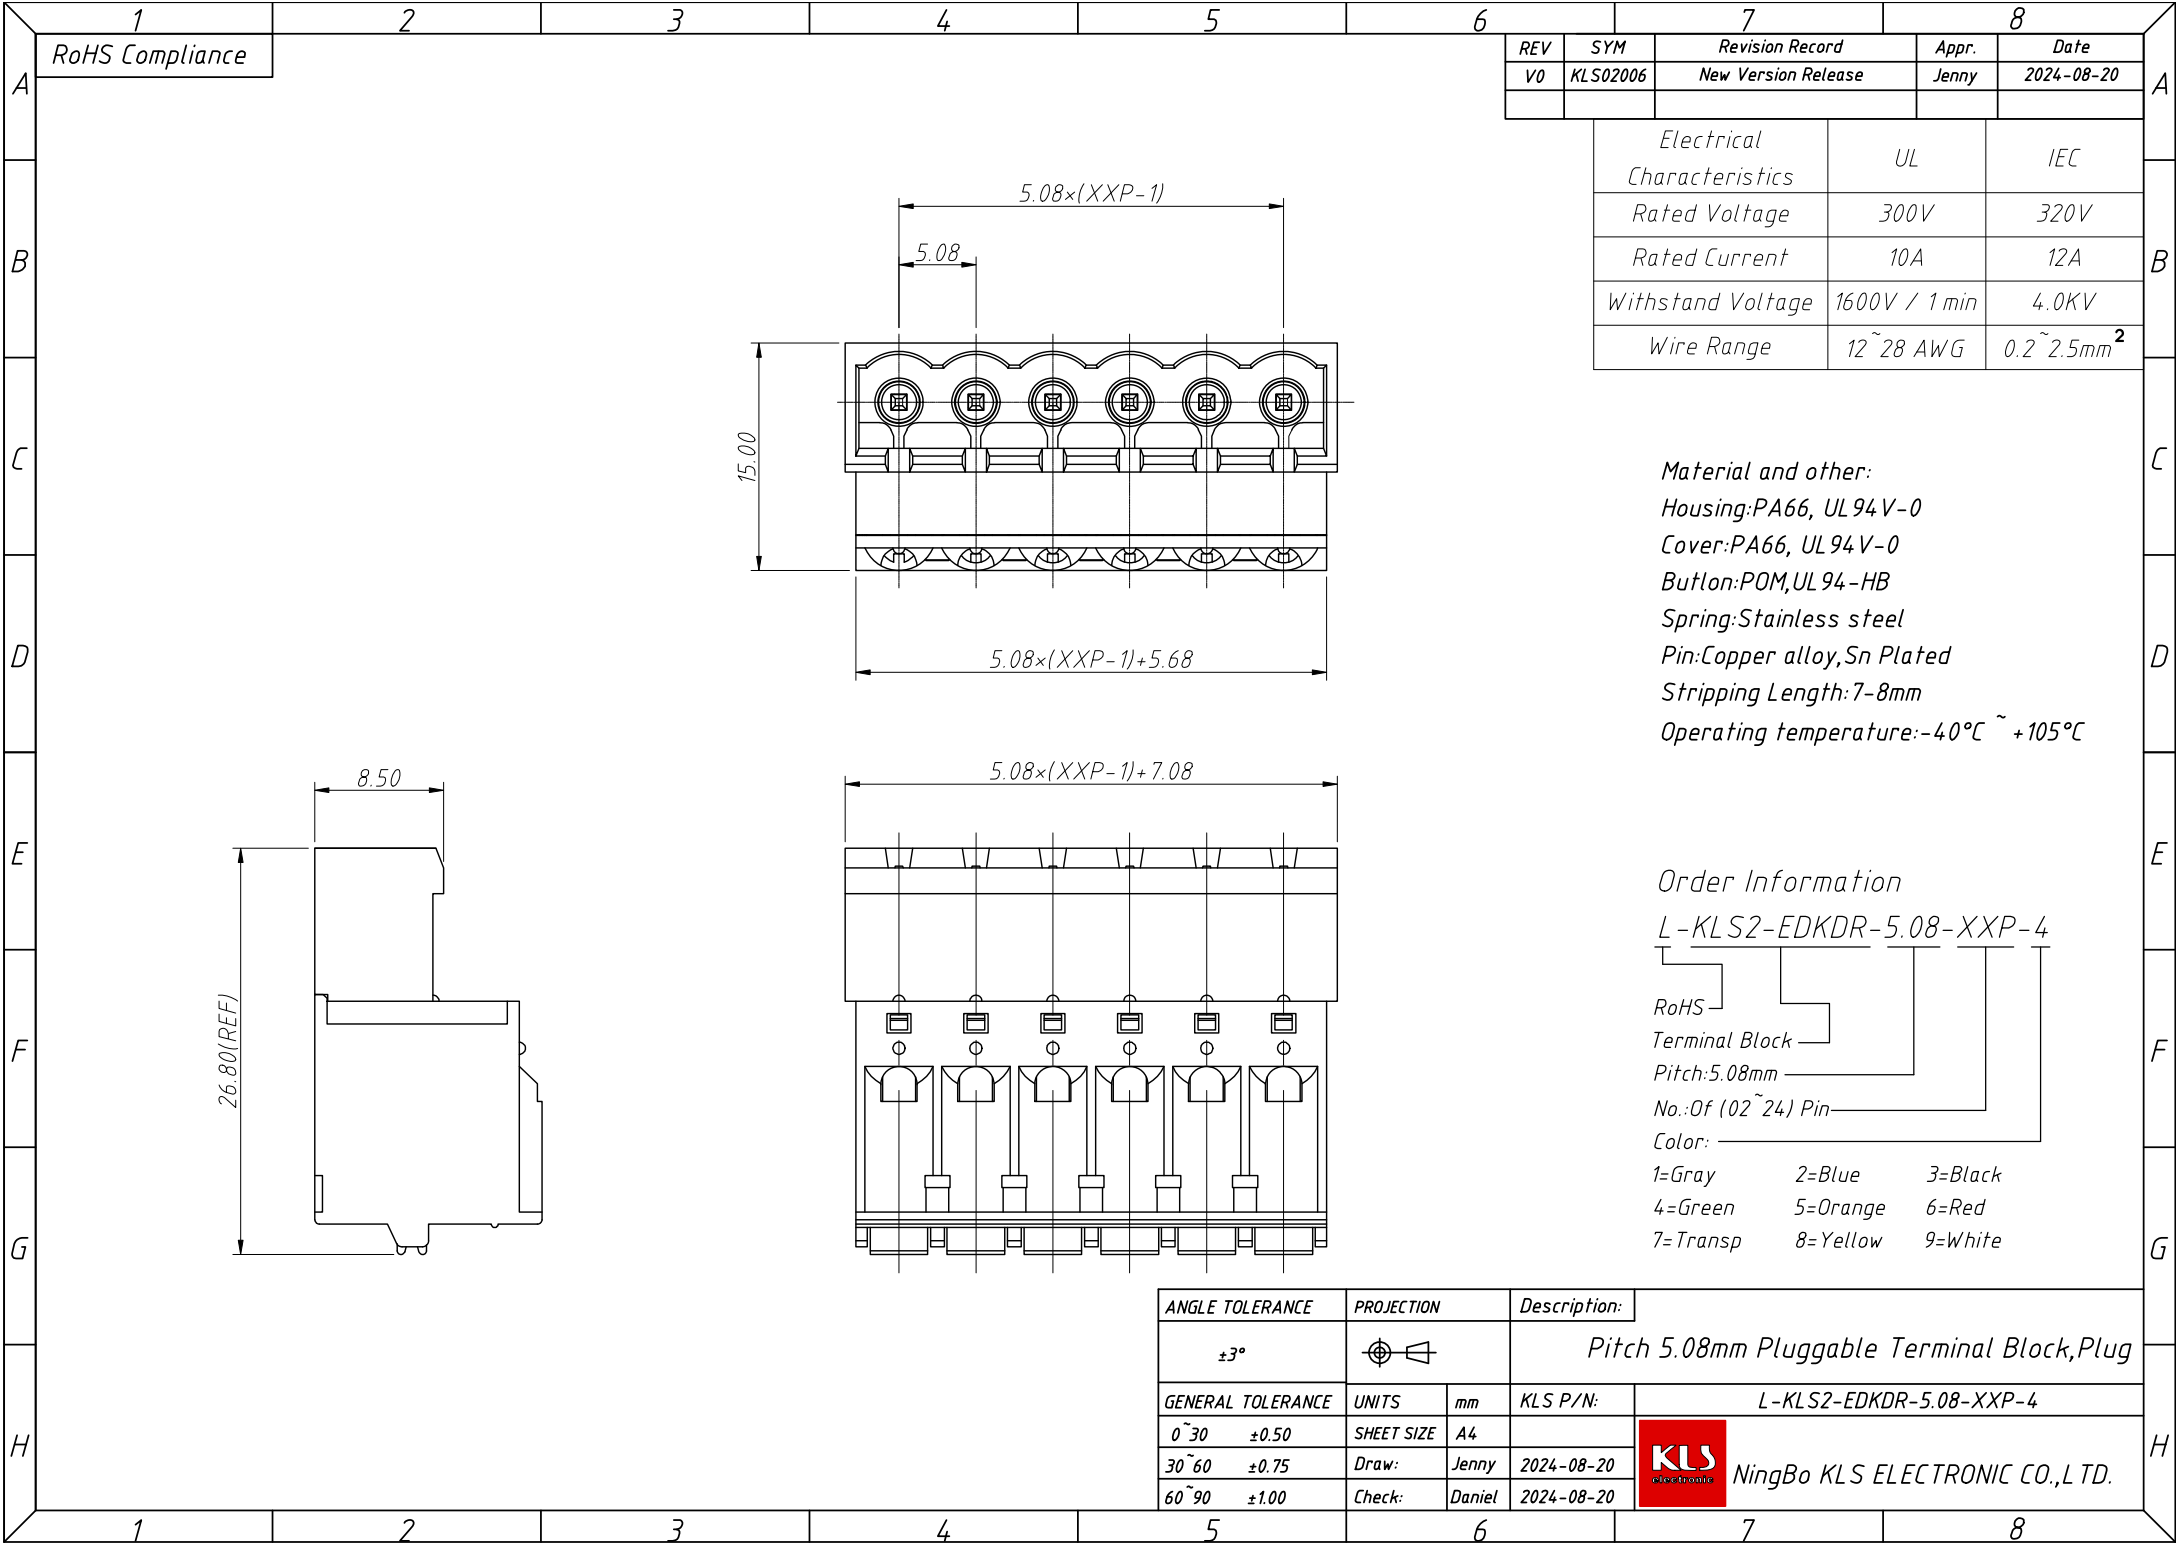

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS02006	New Version Release		Jenny	2024-08-20
		Electrical Characteristics		UL	IEC
		Rated Voltage		300V	320V
		Rated Current		10A	12A
		Withstand Voltage		1600V / 1min	4.0KV
		Wire Range		12~28 AWG	0.2~2.5mm ²

Material and other:
Housing:PA66, UL 94V-0
Cover:PA66, UL 94V-0
Button:POM,UL 94-HB
Spring:Stainless steel
Pin:Copper alloy,Sn Plated
Stripping Length:7-8mm
Operating temperature:-40℃ ~ +105℃

Order Information
L-KLS2-EDKDR-5.08-XXP-4

RoHS
Terminal Block
Pitch:5.08mm
No.:Of (02~24) Pin
Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 5.08mm Pluggable Terminal Block,Plug	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
0~30		±0.50	SHEET SIZE	A4	L-KLS2-EDKDR-5.08-XXP-4
30~60		±0.75	Draw:	Jenny	2024-08-20
60~90		±1.00	Check:	Daniel	2024-08-20



NingBo KLS ELECTRONIC CO.,LTD.