

AST90-2348D



RoHS



3-Year Warranty

- Wide input voltage range:
80 - 305VAC/110 - 430VDC
- Operating ambient temperature range:
-40°C to +85°C
- High I/O isolation test voltage up to
4200VAC
- Up to 93% efficiency
- No-load power consumption < 0.21W
- Compact size, high power density
- Output short circuit, over-current,
over-voltage protection
- 4000m altitude application
- Plastic case meets UL94V-0 flammability

Description

AST90-23XXD series features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced insulation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets UL/IEC/EN/BS EN62368, IEC/EN60335, EN61558 standards. The converters are widely used in industrial, power, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
/	AST90-2312D	80.4W	12V/6700mA	92	6800
	AST90-2315D	85.05W	15V/5670mA	92.5	4500
	AST90-2324D	90W	24V/3750mA	93	3000
	AST90-2348D		48V/1875mA	93	470

Note: * Use suffix "A2S" for chassis mounting and suffix "A4S" for Din-Rail mounting.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Voltage Range	AC input	80	--	305	VAC	
	DC input	110	--	430	VDC	
Input Frequency		47	--	63	Hz	
Input Current	115VAC	--	--	2	A	
	230VAC	--	--	1.1		
Inrush Current	115VAC	--	35	--		
	230VAC	--	65	--		
Leakage Current	277VAC/50Hz	0.25mA RMS Max.				
Built In Fuse		3.15A/300V, slow-blow				
Hot Plug		Unavailable				

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			--	±2	--	%
Line Regulation	Full load		--	±0.5	--	
Load Regulation	0% - 100% load		--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V	--	--	120	mV
		24V	--	--	200	
		48V	--	--	240	
Temperature Coefficient			--	±0.02	--	%/℃
Stand-by Power Consumption			--	--	0.21	W
Short Circuit Protection			Hiccup, continuous, self-recovery			
Over-current Protection			≥110%Io, self-recovery			
Over-voltage protection	12VDC output		≤16VDC (Hiccup or clamp)			
	15VDC output		≤25VDC (Hiccup or clamp)			
	24VDC output		≤35VDC (Hiccup or clamp)			
	48VDC output		≤60VDC (Hiccup or clamp)			
Minimum Load			0	--	--	%
Hold-up Time	115VAC input		--	10	--	ms
	230VAC input		--	30	--	

Note: * The “Tip and barrel method” is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-output	Electric Strength Test for 1min., leakage current <5mA	4200	--	--	VAC
Insulation Resistance	Input - output	At 500VDC	100	--	--	MΩ
Operating Temperature			-40	--	+85	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Temperature	Wave-soldering		260 ± 5°C; time: 5 - 10s			
	Manual-welding		360 ± 10°C; time: 3 - 5s			
Switching Frequency			--	75	--	KHz
Power Derating	-40°C to -30°C		5.0	--	--	% / °C
	+50°C to +70°C		2.50	--	--	
	+70°C to +85°C		1.66	--	--	
	80VAC - 100VAC		1.0	--	--	% / VAC
	2000m - 4000m		10.0	--	--	% / Km
Safety Standard			IEC/UL62368-1, EN60335-1, EN61558-1 safety approved & EN/BS EN62368-1(Report)			
Safety Class			CLASS II			
Vibration			10 - 500Hz, 2G 10min./1cycle, period for 60min. Each along X, Y, Z axes			
MTBF			MIL-HDBK-217F@25°C >500,000 h			


Mechanical Specifications

Case Material		Black plastic, flame-retardant and heat-resistant (UL94V-0)
Dimension	Horizontal package	87.00 x 52.00 x 29.50 mm
	A2 chassis mounting	135.00 x 70.00 x 37.90 mm
	A4 Din-Rail mounting	137.00 x 70.00 x 42.40 mm
Weight	Horizontal package	200g (Typ.)
	A2S chassis mounting	280g (Typ.)
	A4S Din-Rail mounting	350g (Typ.)
Cooling Method		Free air convection

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B
	Harmonic current	IEC/EN61000-3-2 CLASS A
Immunity	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV perf. Criteria A
	RS	IEC/EN61000-4-3 10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2KV perf. Criteria A
	Surge	IEC/EN61000-4-5 line to line ±2KV perf. Criteria A
		IEC/EN61000-4-5 line to line ±2KV/ line to PE ±4KV (See Fig. 2 for recommended circuit)
	CS	IEC/EN61000-4-6 10Vr.m.s perf. Criteria A
	PFM	IEC/EN61000-4-8 30A/m perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11 0%, 70% perf. Criteria B

Product Characteristic Curves

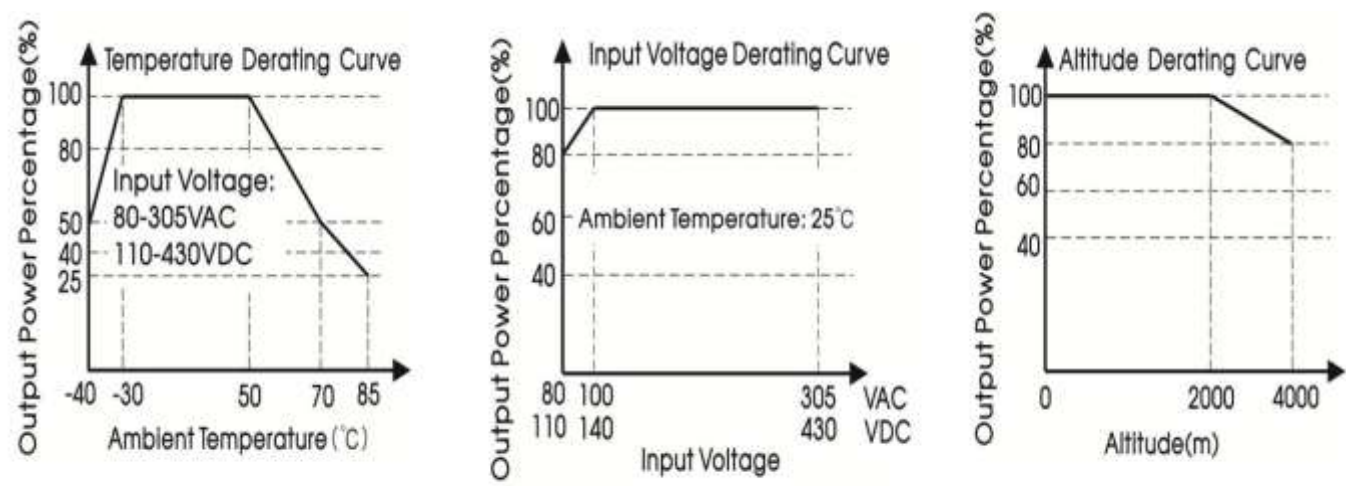

Note: ① With an AC input between 80-100VAC and a DC input between 110-140DC, the output power must be derated as per temperature derating curves;

Product Characteristic Curves

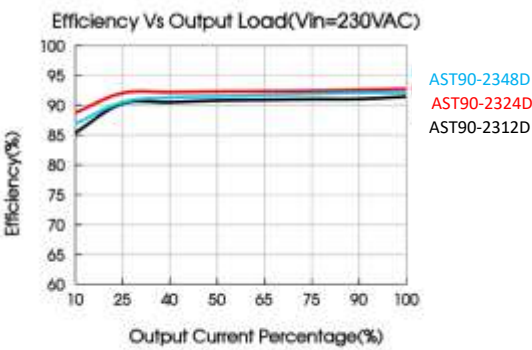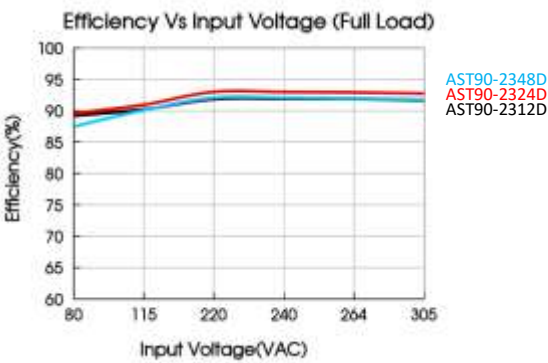

Design Reference

1. Typical application

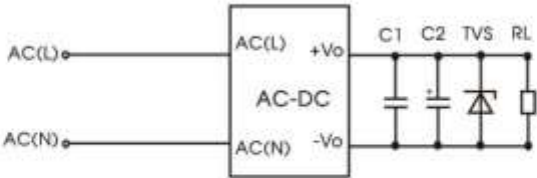


Fig. 1: Typical circuit diagram

Part No.	C1	C2	TVS
AST90-2312D	1uF/100V	330uF/35V	SMBJ20A
AST90-2315D		330uF/35V	SMBJ20A
AST90-2324D		200uF/35V	SMBJ30A
AST90-2348D		100/63V	SMBJ60A

Output Filter Components:
We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

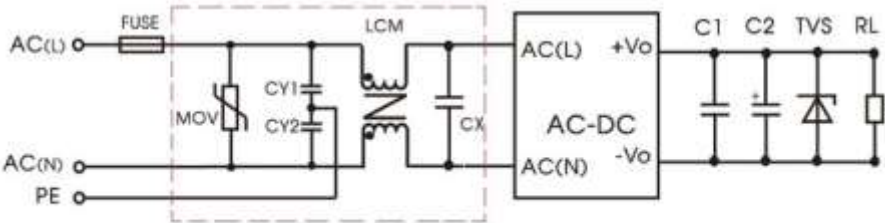


Fig. 2: EMC application circuit with higher requirements


Design Reference

Component	Recommended value
FUSE	6.3A/300V, slow-blow, required
MOV	S14K350
CY1/CY2	1nF/400VAC
CX	684K/310V
LCM	10mH

Dimensions and Recommended Layout

units: mm [inch]
pin diameter tolerance: ± 0.10 [± 0.004]
tolerance: ± 0.50 [± 0.020]

PIN CONNECTIONS	
PIN	Function
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

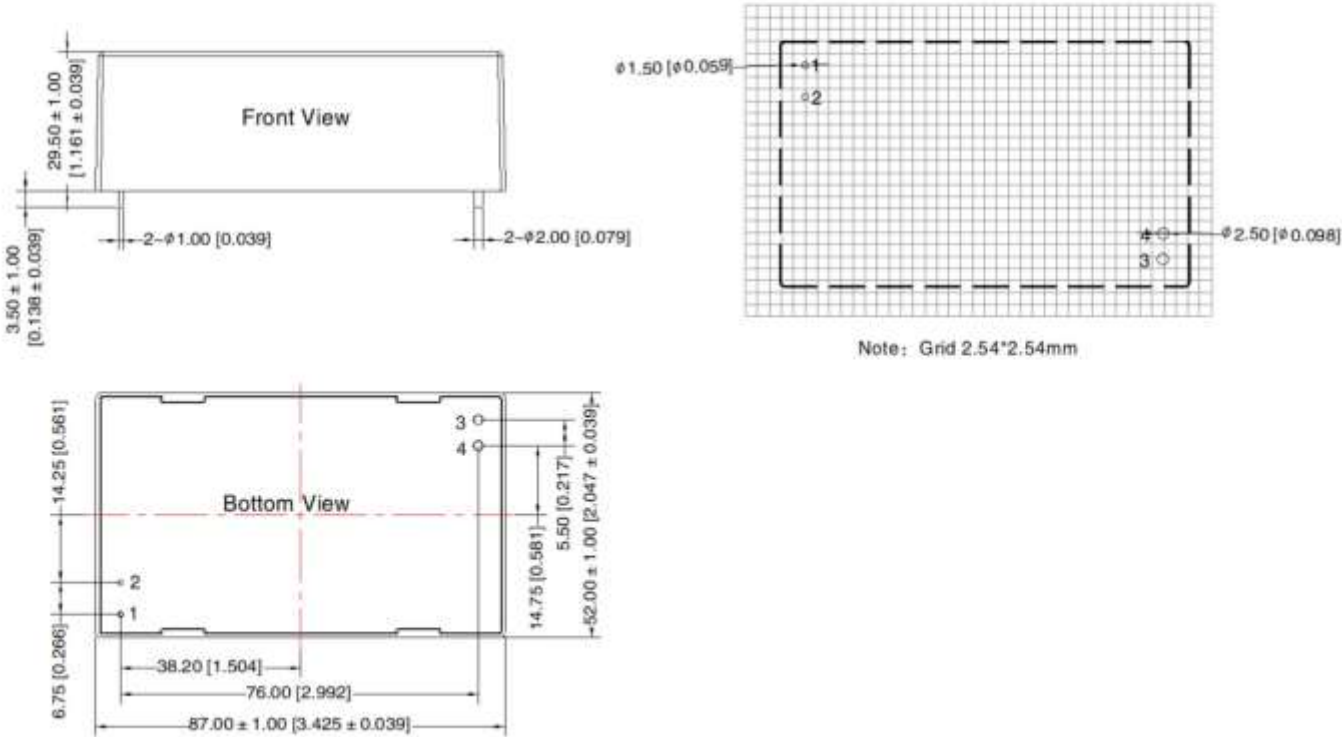

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";