



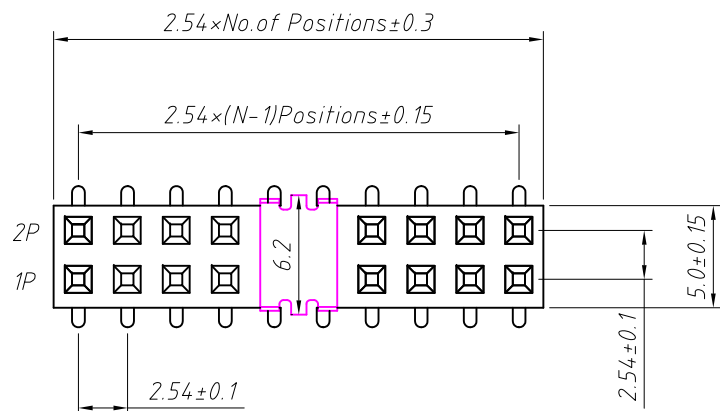

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

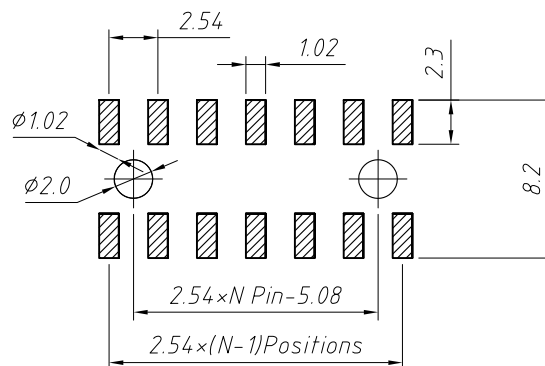

Material:

Standard:PA6T

Contact: Brass

Plating: Au or Sn Over 50u" Ni

Insulator: Polyester, UL 94 V-0

Electrical Characteristics:

Rated Current: 3AMP

Contact Resistance: 20mΩ Max



Withstand Voltage: 1000V AC/DC

Insulator Resistance: 1000MΩ Min


Mechanical:

Operating Temperature: -40°C~+105°C

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

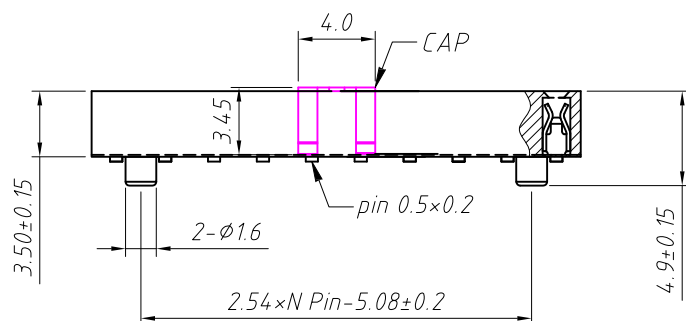

W=With Post



T=W/O Post

Order Information:

L-KLS1-208-3.5-2-XX-T-L1xL2-B-R

L: RoHS

Pin Header Series

208:2.54mm

Plastics Height:3.5mm

Per Row:Double layer

Pin: No. of Pins (02~80)

SMT Pin:

T=Without Post, T3=With Post

Size:L1xL2

Material:A=PBT B=PA6T C=LCP

Packing:

A=Tray

T=Tube

M=Reel+Mylar

P=Tube+Cap

R=Reel+Cap

Dimension antitheses list (mm)

ITEM	L1	L2	Plastic Height
Standard	3.75	7.20	3.50
Nonstandard	---	---	---

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		2.54x3.5mm Female Header Double layer, SMT Mounting type, 2xN Pin	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-208-3.5-2-XX-T-L1xL2-B-R
x.xx ±0.20	Draw:	Daniel	2018-07-10
x.xxx ±0.10	Check:	Daniel	2018-07-10



NingBo KLS ELECTRONIC CO.,L TD.