

SOSEN LED Driver, Your Smart Choice

Specifications

SS-150VP Series LED Driver

Model: SS-150VP-XX

Description: 150W LED Driver

Rev.: V08

Release Date: 2025-06-25

SS-150VP Series LED Driver

SOSEN
LED DRIVER



LED DRIVER

VP Series



Features:

- Efficiency up to 92%
- Dimming: DALI-2, 0-10V, PWM, Resistor, Timing
- Dim-to-Off
- Surge Protection: CM: 10kV, DM: 6kV
- AUX Power: 12V/0.2A
- Constant Lumen, Life Warning
- Optional Standby(STB) Function
- External NTC to Protect LED Module
- Standby Power<0.5W
- IP67
- Communication Function With PC
- Type HL, suitable for hazardous locations
- Protections: SCP/OTP/OVP
- Warranty: 8 years



DALI-2 **CE** **IP67 Class P**

Description:

SS-150VP series are 150W constant current LED Driver with wide O/P voltage range and adjustable O/P current by program. LED luminaries manufactures can easily to design luminaries and reduce cost.

Application:

High bay lighting, Stadium lighting, Square lighting, Plant lighting, Fish lighting

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Working Voltage	Iout	Iout (DALI-2)	THD (Typ.)	PF (Typ.)	Eff. (Typ.)	Max.Tc
SS-150VP-56*	90-305Vac	150W	22-56V	36-56V	0.35-4.2A	2.1-4.2A	10%	0.95	91%	90°C
SS-150VP-143*	90-305Vac	150W	72-143V	100-143V	0.35-1.5A	0.75-1.5A	10%	0.95	92%	90°C
SS-150VP-215*	90-305Vac	150W	108-215V	143-215V	0.1-1.05A	0.525-1.05A	10%	0.95	92%	90°C

Note:

1.Default Tested: at 220Vac, full load, Ta 25°C.

2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module.

1/20

SS-150VP Series LED Driver

“★” Means Additional Function

Model	DALI (suffix:D)	AUX 12V (suffix:H)	NTC (suffix:N)	Timing	0-10V/PWM Dim /Resistor (suffix:B)	Remark
BH		✓		✓	✓	
BHN		✓	✓	✓	✓	
DH	✓	✓				
DHN	✓	✓	✓			

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	100Vac		277Vac	
AC Input Range	90 Vac		305Vac	
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			1.9A	100Vac, full load
Max Input Power			200W	100Vac, full load
Max Inrush Current(120Vac)			100A	Cold Start
Max Inrush Current(220Vac)			125A	Cold Start
Max Inrush Current(277Vac)			150A	Cold Start
Standby Power			0.5W	220Vac/50Hz, Dim to off or Enable STB
Power Factor	0.95	0.97		220Vac/50Hz, full load
	0.90			100-277Vac/50Hz, 70-100% load
THD		8%	10%	220Vac/50Hz, full load
			20%	100-277Vac/50Hz, 70-100% load

SS-150VP Series LED Driver

Output Characteristics(SS-150VP-56*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	22V		56V	Power Derated @22-36V
Rated O/P Voltage	36V		56V	$P_o=V_o \cdot I_o=150W$, full load
Rated O/P Current	2.7A		4.2A	4.2A for 36V, 2.7A for 56V
Adj. O/P Current (AOC) Range	0.35A		4.2A	By Programming
	2.1A		4.2A	For DALI-2
No Load Voltage			60V	
Efficiency @120Vac	87.0%	88.0%		Output 36V/4.2A
Efficiency @220Vac	90.0%	91.0%		Output 36V/4.2A
Efficiency @277Vac	91.0%	92.0%		Output 36V/4.2A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac, Full load
			0.5S	220Vac, Full load
			0.7S	230Vac, For DALI-2
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection			10W	Driver will not be damaged, Hiccup mode
			0.5W	Driver will not be damaged, Shut down for DALI-2

SS-150VP Series LED Driver

Output Characteristics(SS-150VP-143*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	72V		143V	Power Derated @72-100V
Rated O/P Voltage	100V		143V	Po=Vo*Io=150W, full load
Rated O/P Current	1.05A		1.5A	1.5A for 100V,1.05A for 143V
Adj. O/P Current (AOC)Range	0.35A		1.5A	By Programming
	0.75A		1.5A	For DALI-2
No Load Voltage			160V	
Efficiency @120Vac	89.0%	90.0%		Output 143/1.05A
Efficiency @220Vac	91.0%	92.0%		Output 143/1.05A
Efficiency @277Vac	91.0%	92.0%		Output 143/1.05A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac, Full load
			0.5S	220Vac, Full load
			0.7S	230Vac,For DALI-2
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection			10W	Driver will not be damaged, Hiccup mode
			0.5W	Driver will not be damaged, Shut down for DALI-2

SS-150VP Series LED Driver

Output Characteristics(SS-150VP-215*):

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	108V		215V	Power Derated @108-143V
Rated O/P Voltage	143V		215V	$P_o = V_o \cdot I_o = 150W$, full load
Rated O/P Current	0.7A		1.05A	1.05A for 143V, 0.7A for 215V
Adj. O/P Current (AOC) Range	0.1A		1.05A	By Programming
	0.525A		1.05A	For DALI-2
No Load Voltage			230V	
Efficiency @120Vac	89.0%	90.0%		Output 215/0.7A
Efficiency @220Vac	91.0%	92.0%		Output 215/0.7A
Efficiency @277Vac	91.0%	92.0%		Output 215/0.7A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac, Full load
			0.5S	220Vac, Full load
			0.7S	230Vac, For DALI-2
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc: 0°C~90°C
OTP	90°C	100°C	110°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection			10W	Driver will not be damaged, Hiccup mode
			0.5W	Driver will not be damaged, Shut down for DALI-2

SS-150VP Series LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
Aux Power	O/P Voltage	10.8V	12V	13.2V	
	O/P Current	0mA		200mA	
0-10V Dimming (Optional)	Dim Vcc	0V		12V	Negative dimming by programming
	Dim Range	10%loset		100%loset	DIM+ source current 110uA.
	Rec.Dim Range	0V		10V	Dimming prohibits reverse connection.
PWM Dimming (Optional)	PWM High	9.8V		10.2V	Negative dimming by programming
	PWM Low	0V		0.3V	DIM+ source current 110uA.
	Frequency	1KHz		2KHz	Dimming prohibits reverse connection.
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0K		100K	Negative dimming by programming
	Dim Range	10%		100%	DIM+ source current 110uA.
Dim to Off (Optional)	Dim off	7%	8%	9%	By DC voltage, PWM, resistance dimming ratio
	Dim on	8%	9%	10%	By DC voltage, PWM, resistance dimming ratio
DALI Dimming Level		1-170(10%)		254(100%)	Logarithmic dimming curve
Timing Curve(Optional)		By programming			DALI models does not support this function
DALI Dimming(Optional)		Meet DALI-2			
Constant Lumen(Optional)		By programming			DALI models does not support this function
Life Warning(Optional)		By programming			DALI models does not support this function
Life Time($T_c \leq 75^\circ\text{C}$)		71,000 hours			80% Load
MTBF		198,200 hours			220Vac, full load, $T_a = 25^\circ\text{C}$ (MIL-HDBK-217F)
IP Grade		IP67			
T_c		90°C			
Warranty		8 years			$T_c: 75^\circ\text{C}$
Net Weight		1000g			
Dimension		209mm*71mm*39.6mm 8.23in*2.8in*1.56in			L x W x H

NOTE: 1, All the parameters above are tested $T_a 25^\circ\text{C}$ and LED load, unless specified.

2. When using resistor dimming (parallel connection of dimming wires), if the number of parallels is: N, the dimming resistor should be realized 0-100% dimming range, resistance value: $91\text{K}\Omega/\text{N}$.

6/20

SS-150VP Series LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13	✓	
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Radiation Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
	ANSI C82.77-10	
Surge	IEC/EN61000-4-5	DM 6kV,CM 10kV,Criterion B
Ring Wave	IEC/EN 61000-4-12	DM 6kV,CM 6kV,Criterion B

SS-150VP Series LED Driver

Safety Test Items:


Safety Test Items	Technical Indicators			Remark
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Output	1600Vac	3000Vac	3750Vac	Reinforced insulation
Input-Case	1600Vac	1500Vac	1875Vac	Basic insulation
Input-Dim	1600Vac	3000Vac	3750Vac	Reinforced insulation
Output-Dim	1600Vac	1000Vac	1000Vac	Basic insulation
Output-Case	1600Vac	1000Vac	1000Vac	Basic insulation
Dim-Case	500Vac	500Vac	500Vac	Basic insulation
Insulation Resistance	$\geq 10M\Omega$			Input-Output, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$			25A/1min
Leakage Current	$\leq 0.75mA$			277Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short (ACL and ACN), (V+ and V- and NTC+ and NTC-), (Dim+ and Dim - and Vaux+ and Vaux- and STB) when Hi-pot test.
3. The CCC withstand voltage test needs to disconnect the built-in lightning protection tube. According to the IEC 60598-1:14 standard section 10.2, the “built-in lightning protection tube” can be marked on the nameplate to disconnect the discharge tube on testing.

Performance Curves:


Input inrush Current

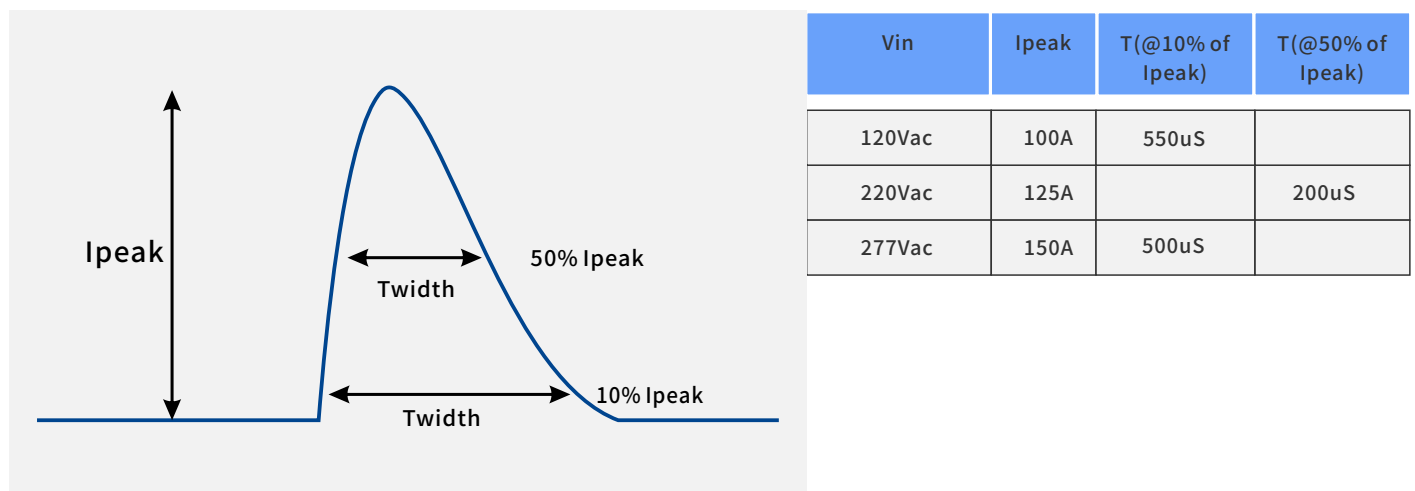

SS-150VP Series LED Driver

Performance Curves:

Output Voltage Vs. Output Current(DIM/AOC Window)

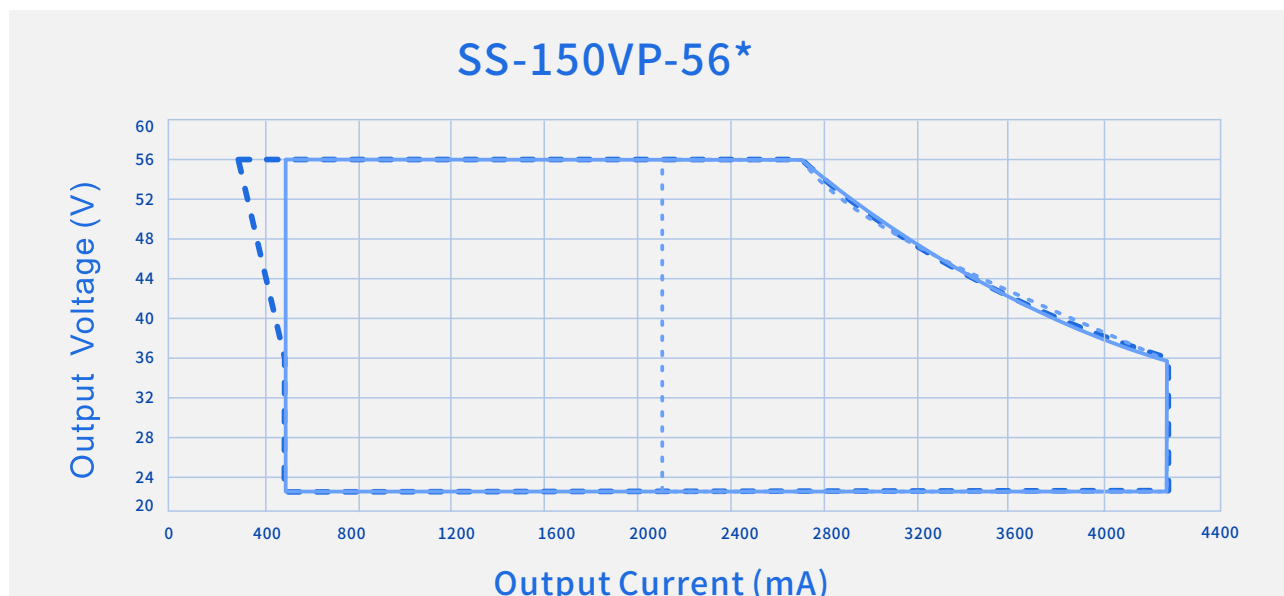


----- Dimming Window

———— AOC Window

..... AOC Window For DALI-2

Output Voltage Vs. Output Current(DIM/AOC Window)

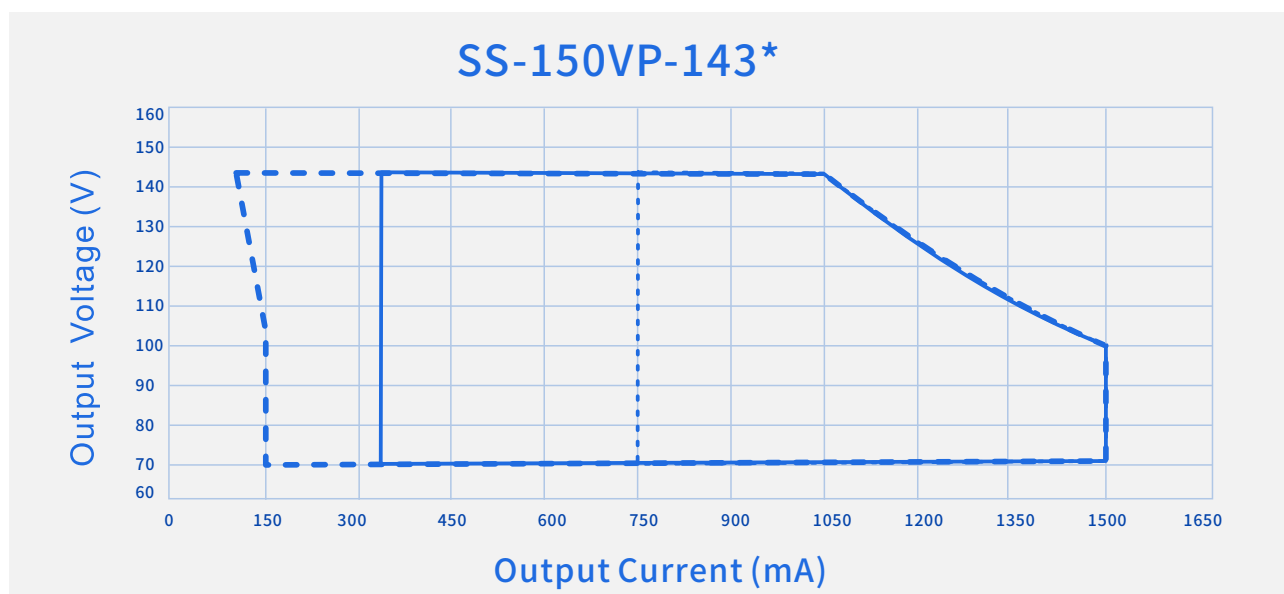

----- Dimming Window


———— AOC Window

..... AOC Window For DALI-2


SS-150VP Series LED Driver

Performance Curves:

Output Voltage Vs. Output Current(DIM/AOC Window)

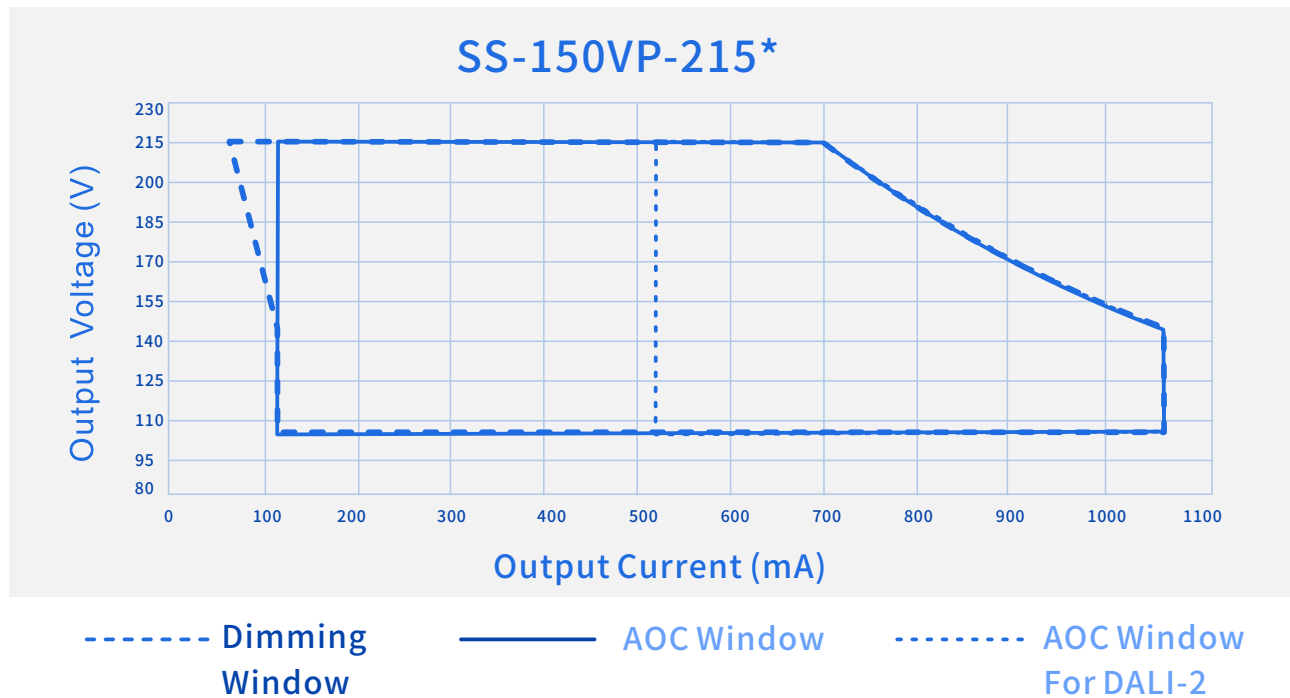


Efficiency Vs. Output Voltage (Vin=120Vac)

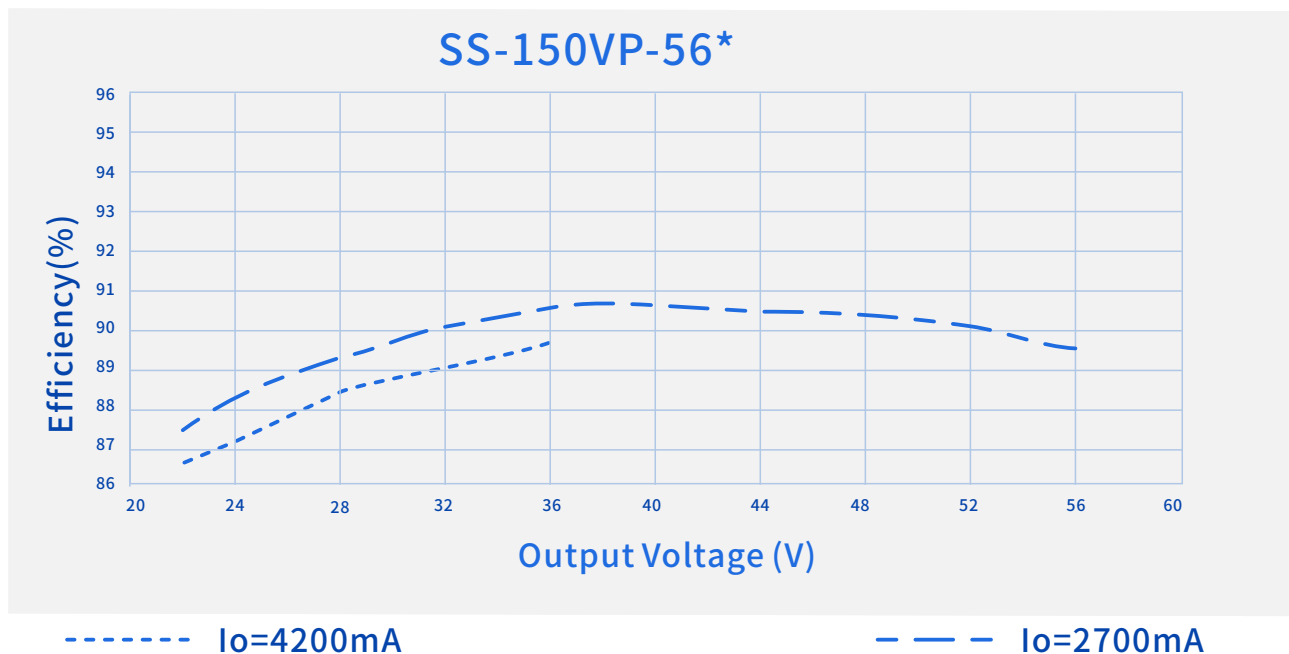


SS-150VP Series LED Driver

Performance Curves:

Efficiency Vs. Output Voltage ($V_{in}=220V_{ac}$)

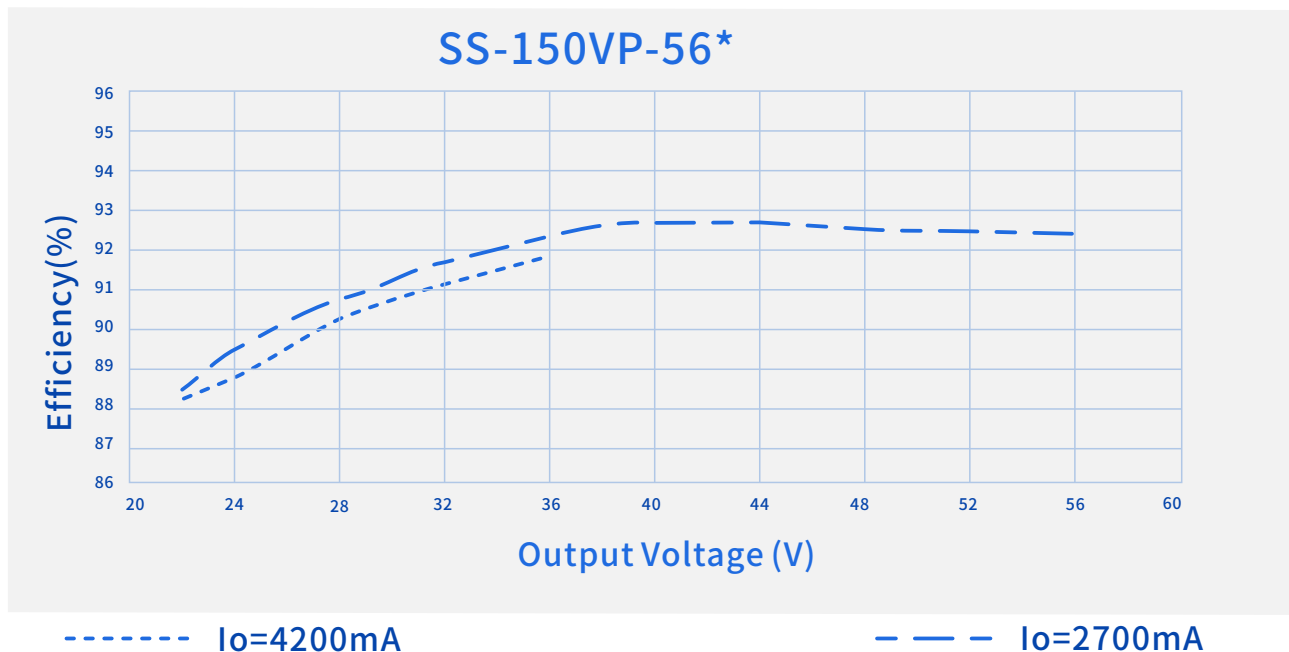


Efficiency Vs. Output Voltage ($V_{in}=277V_{ac}$)

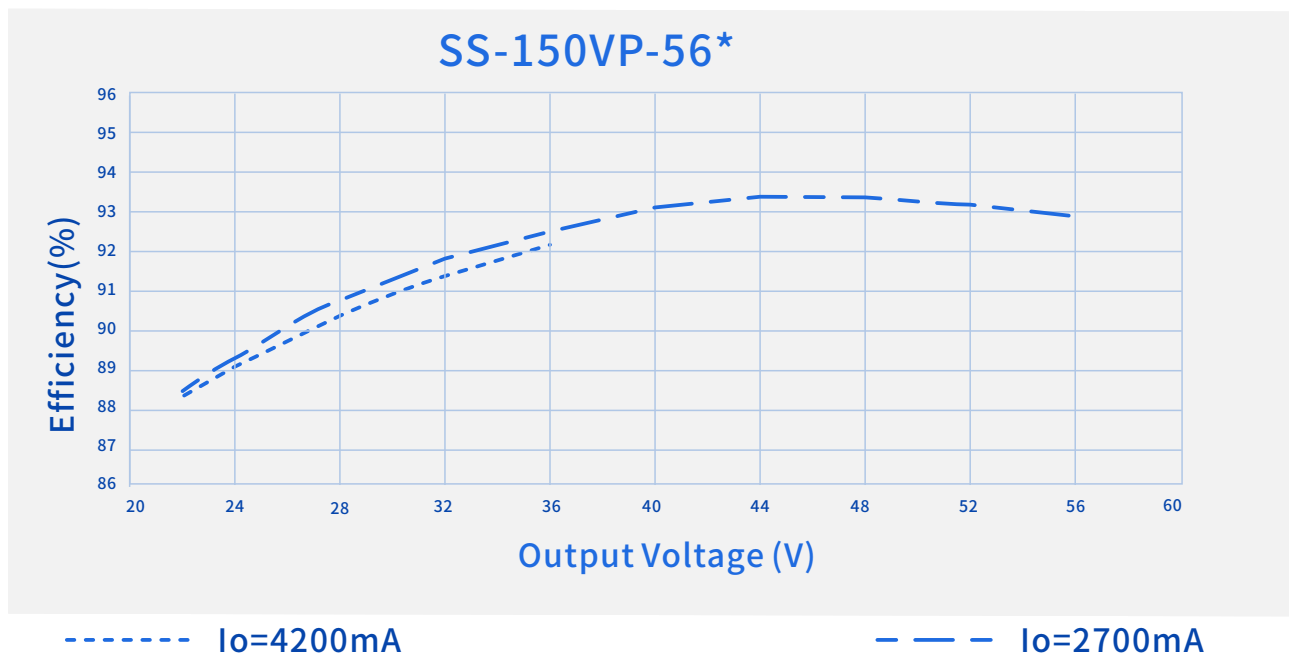


SS-150VP Series LED Driver

Performance Curves:

Efficiency Vs. Output Voltage (Vin=120Vac)

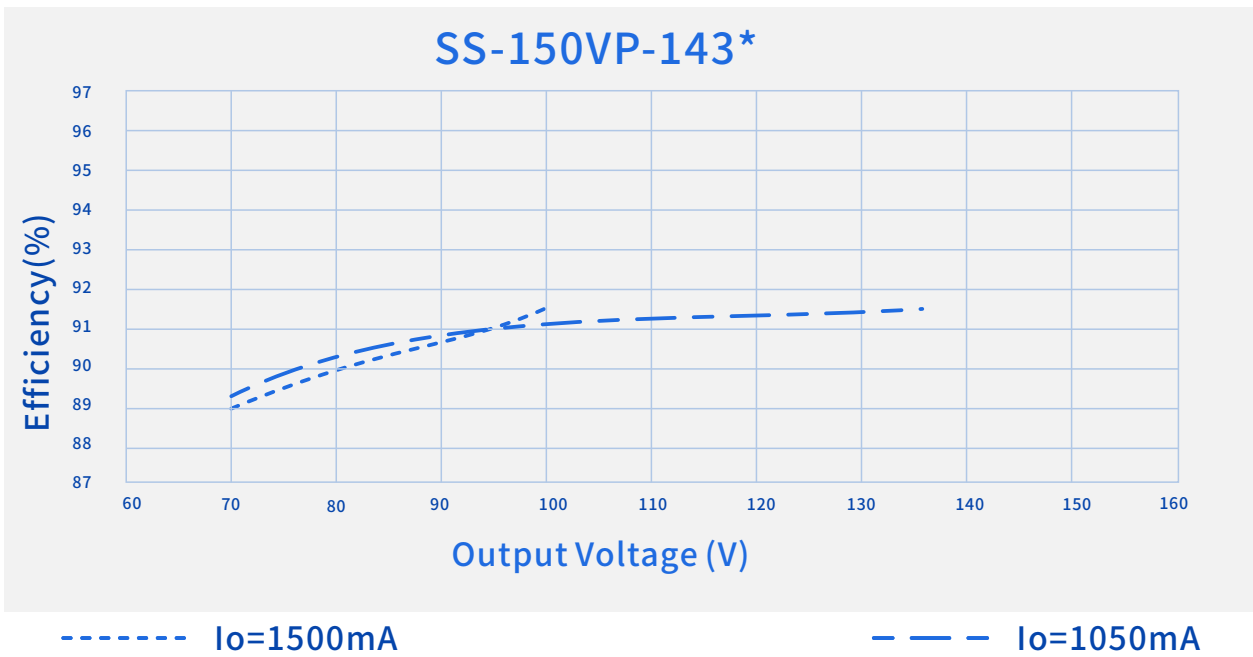


Efficiency Vs. Output Voltage (Vin=220Vac)

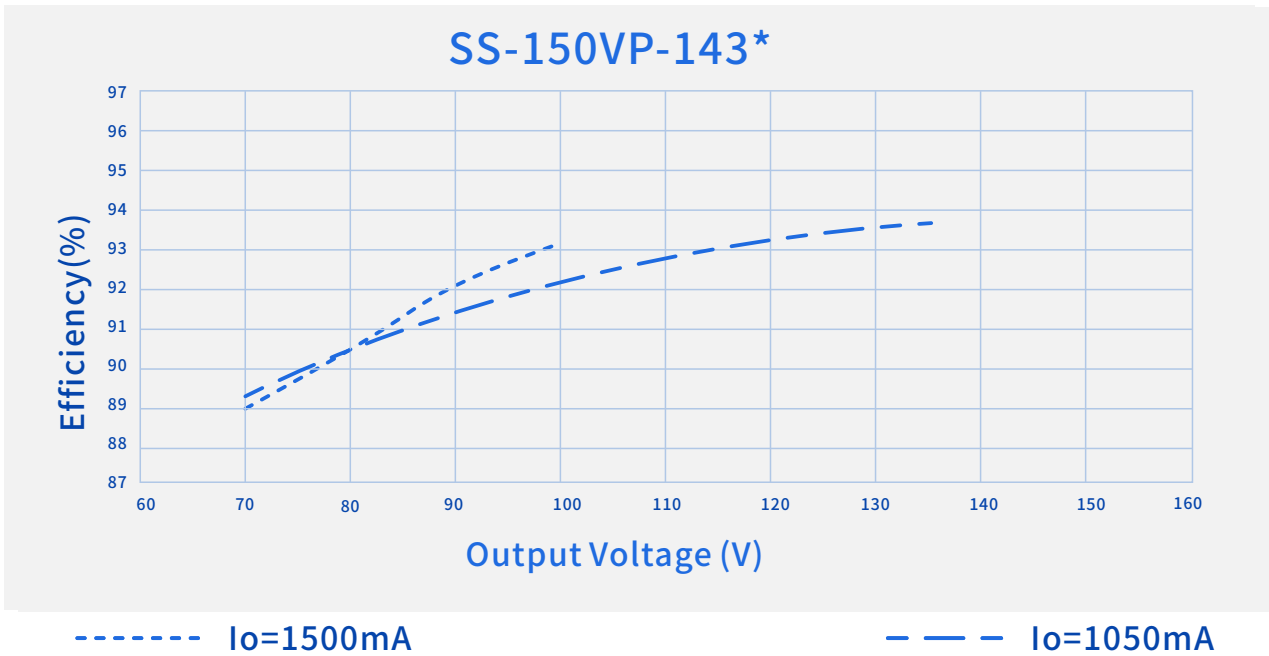


SS-150VP Series LED Driver

Performance Curves:

Efficiency Vs. Output Voltage ($V_{in}=277V_{ac}$)

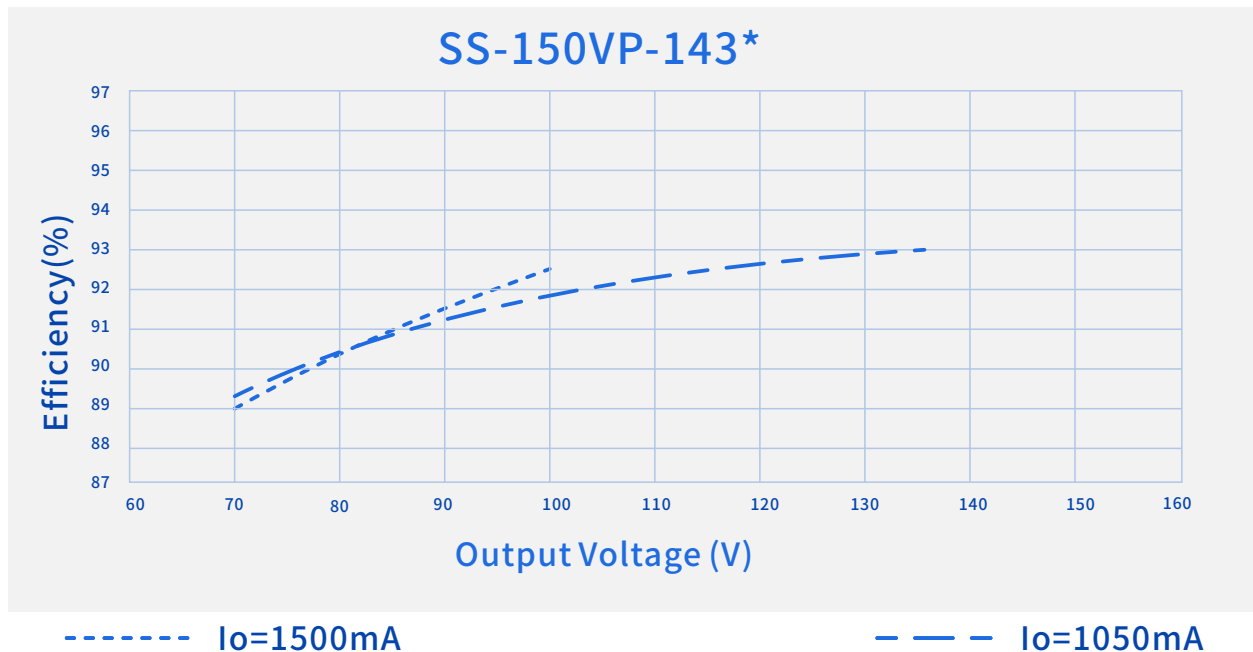


Efficiency Vs. Output Voltage ($V_{in}=120V_{ac}$)

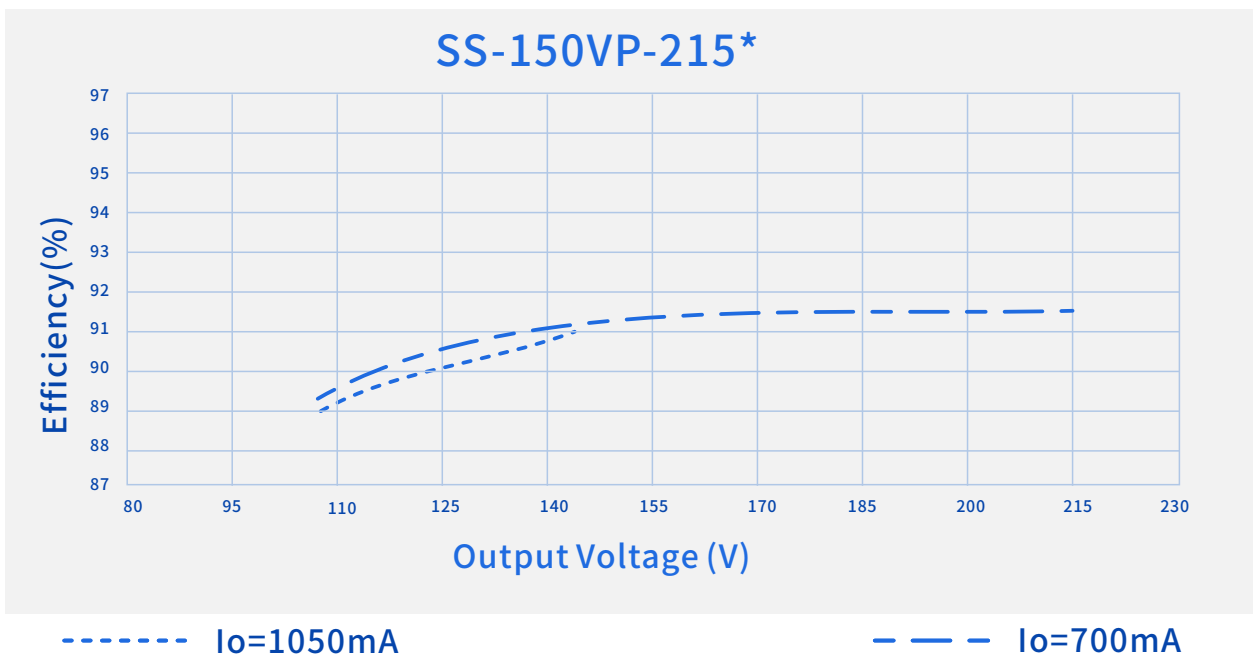


SS-150VP Series LED Driver

Performance Curves:

Efficiency Vs. Output Voltage (Vin=220Vac)

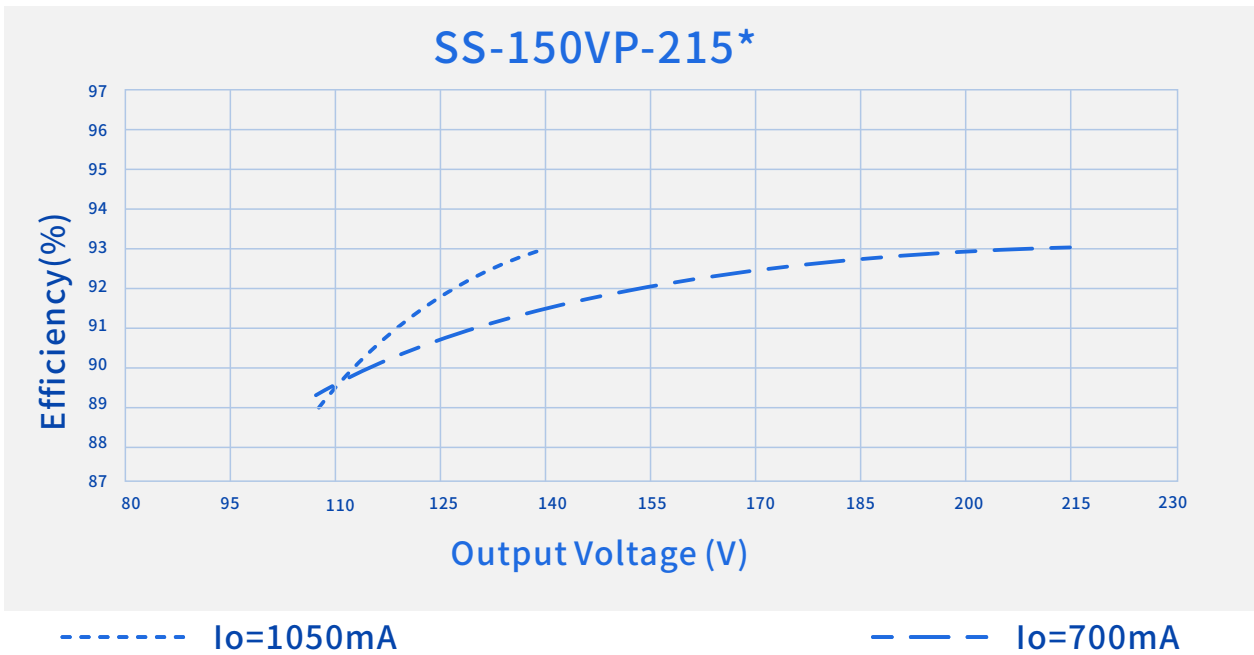


Efficiency Vs. Output Voltage (Vin=277Vac)

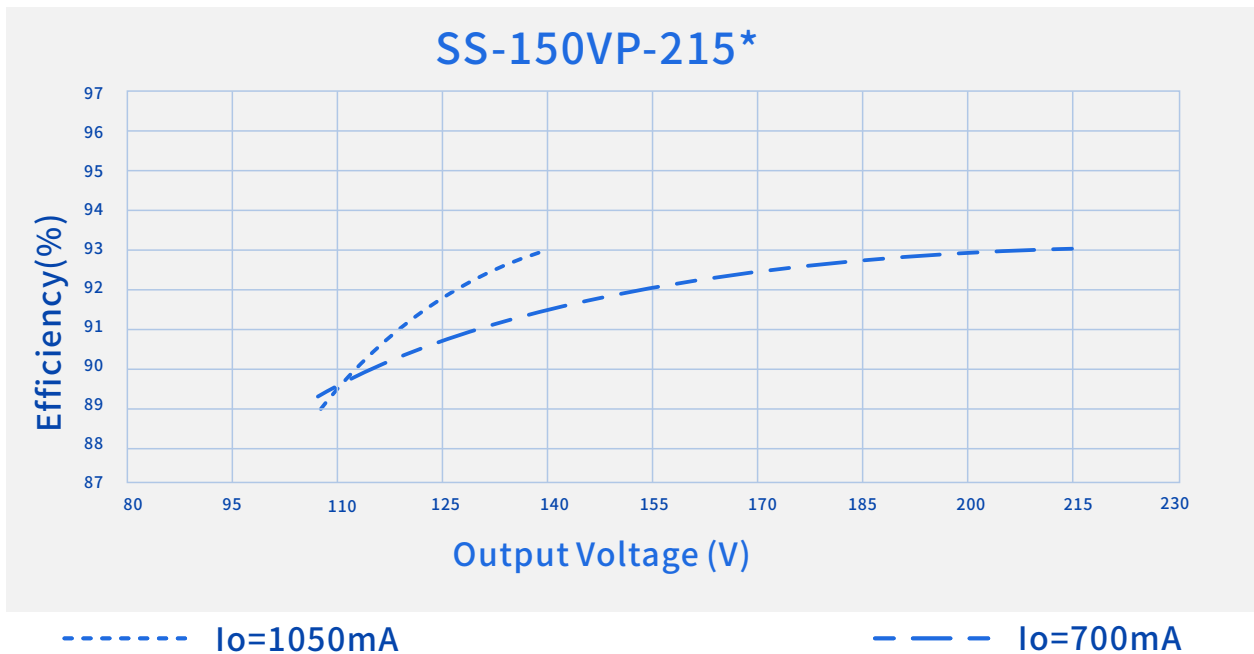


SS-150VP Series LED Driver

Performance Curves:

Power Factor Vs. Output Power

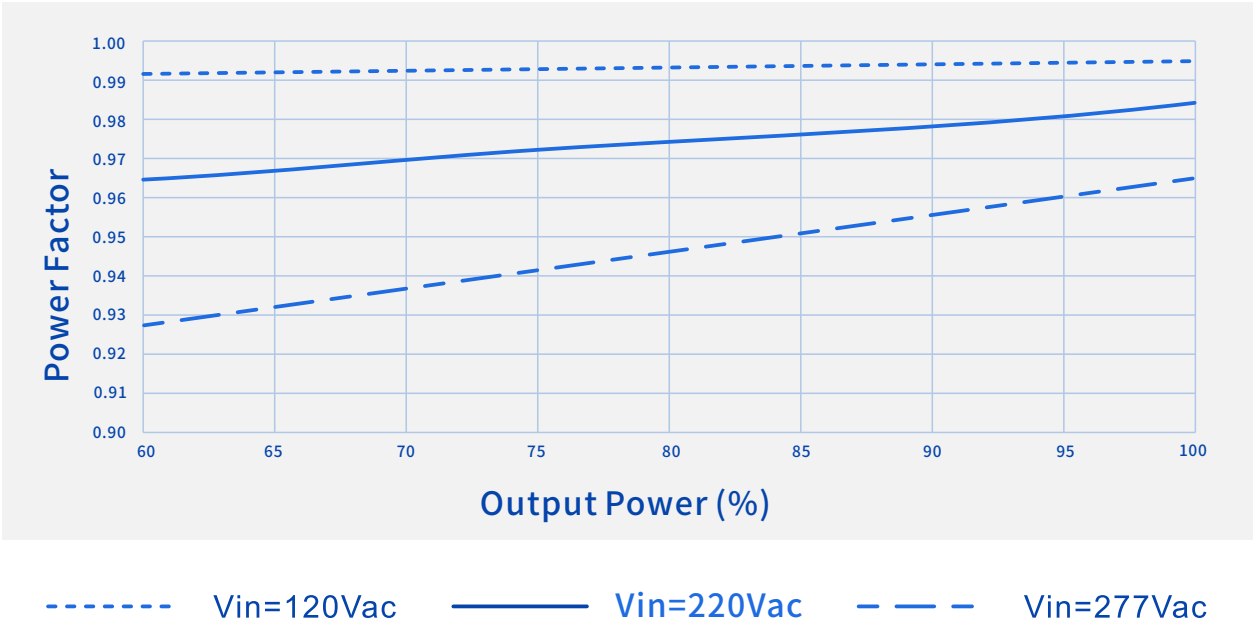


THD Vs. Output Power

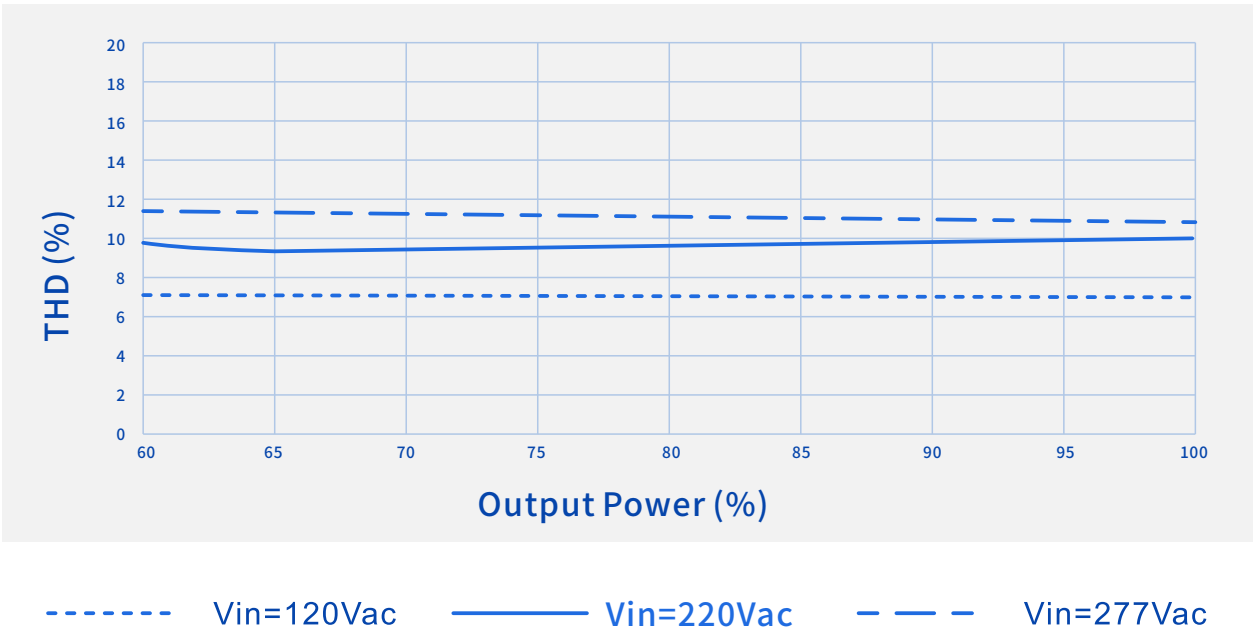


SS-150VP Series LED Driver

Performance Curves:


Output Power Vs. Input Voltage

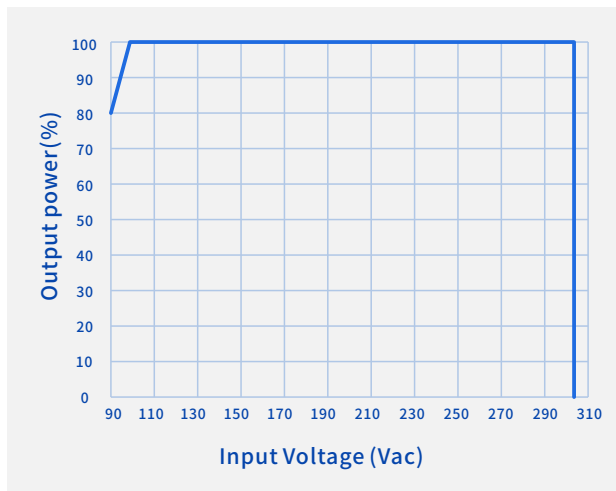


Output Power Vs. Case Temperature

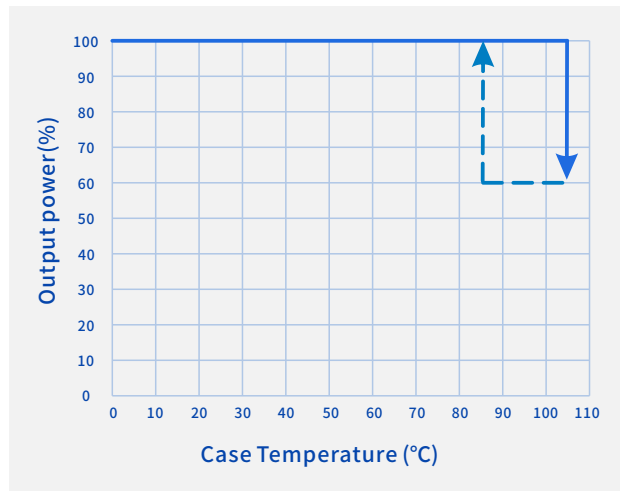

Output Power Vs. Dimming

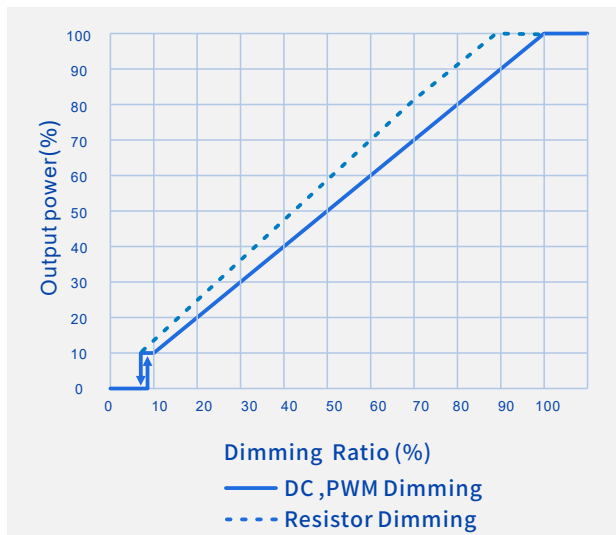

Life Time Vs. Case Temperature

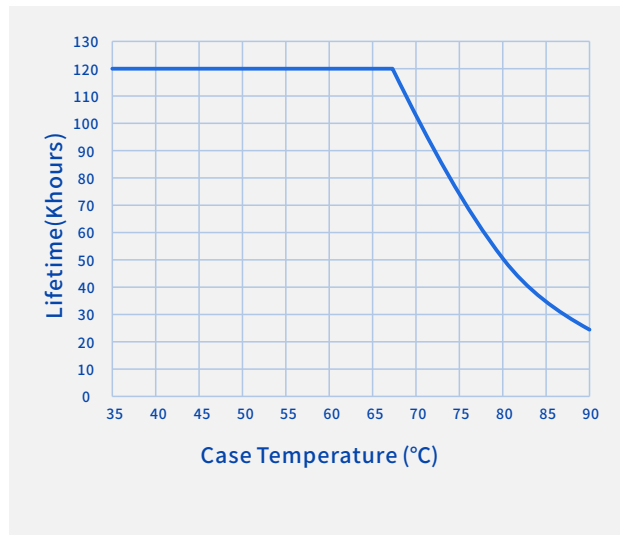

SS-150VP Series LED Driver

Constant Lumen Output


Constant Lumen Output are design to maintain fixture's stable output lumen by increasing driver's output current within driver's life span to counteract LED lumen degradation.

Programming connection diagram:

Legacy Timer: Driver's output follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's output will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's output will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

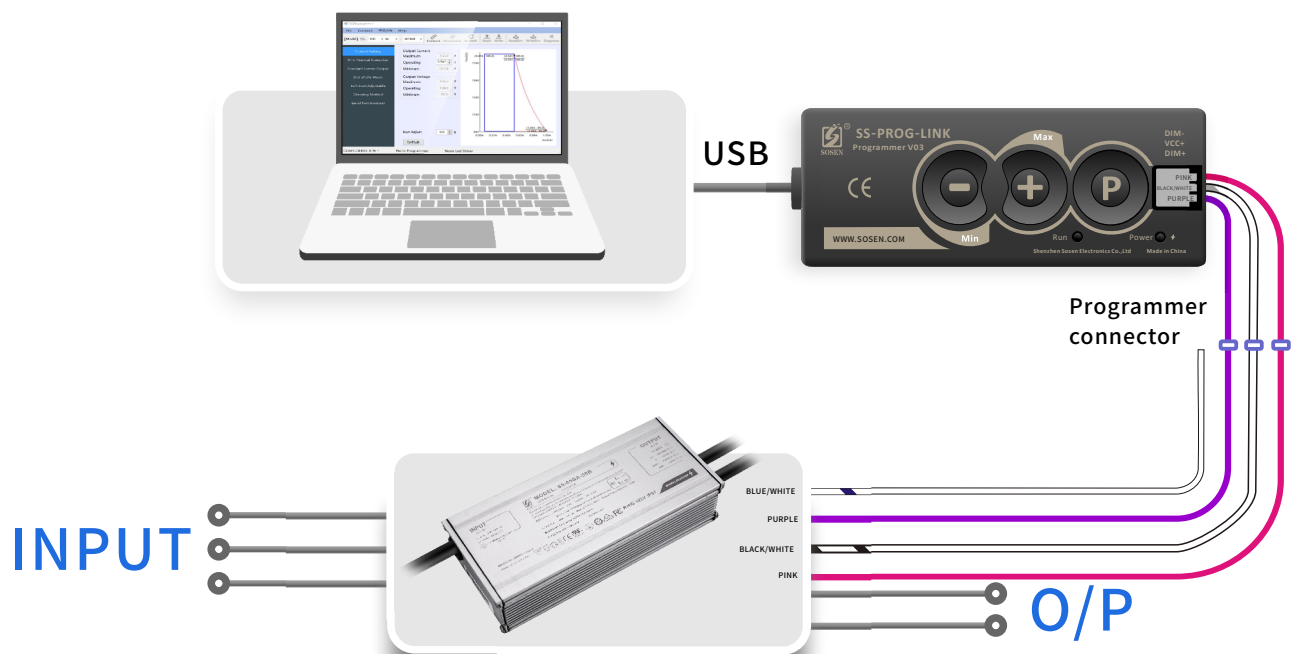


Note:

1. Programming could be completed by off-line mode either without turn on the driver nor without PC, other than the traditional on-line mode.
2. The DALI-2 models only support setting the rated output current through SS-DALI-PUSH and does not support programming through SS-PROG-LINK with PC.

SS-150VP Series LED Driver

Mechanical Characteristics

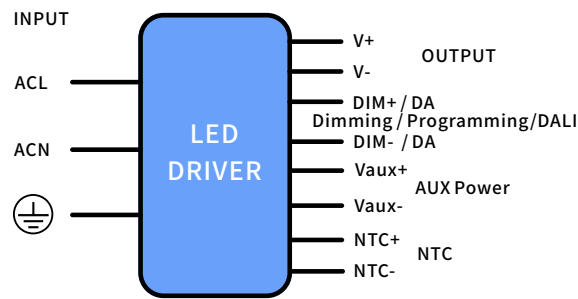

AC Input Cable(Exposed Length 450±10mm):
Global model: SJOW,3*17AWG,O.D: 8.2mm,Brown:L,Blue:N,Yellow/Green:⊕
UL model: SJTW,3*18AWG,O.D: 7.8mm,Black:L,White:N,Green:⊕

DC Output Cable(Exposed Length 250±10mm):
Global model: SJOW,2*17AWG,O.D: 7.7mm,Brown:V+, Blue:V-
UL model: SJTW,2*18AWG,O.D: 7.3mm,Red:V+, Black:V-

DIM/AUX Power/Programming Cable (Exposed Length 220±10mm):
UL model: STYLE 21996#22AWG , O.D: 5.6mm, Purple: DIM+, Pink: DIM-, Black/White: Vaux+, Blue/White: Vaux-


NTC Cable(Exposed Length 300±10mm):
UL model:STYLE 21996#22AWG , O.D: 4.7mm, Red/White: NTC+, Blue/White: NTC-

Name Description	Standard Code	mm(In.)
Case Length	L3	182(7.17)
Case Width	W1	71(2.8)
Case Height	H	39.6(1.56)
Overall Length	L1	209(8.23)
Mounting Hole Length	L2	196(7.72)
Mounting Hole Width	W2	34(1.34)
TC Point Position	X	70(2.76)
TC Point Position	Y	46(1.81)

Note:

1,Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

2,AC Input Cable,DC O/P Cable,DIM/AUX Power/Programming Cable: Peeled length of cable:43±5mm, Tinned length of wire:10±2mm

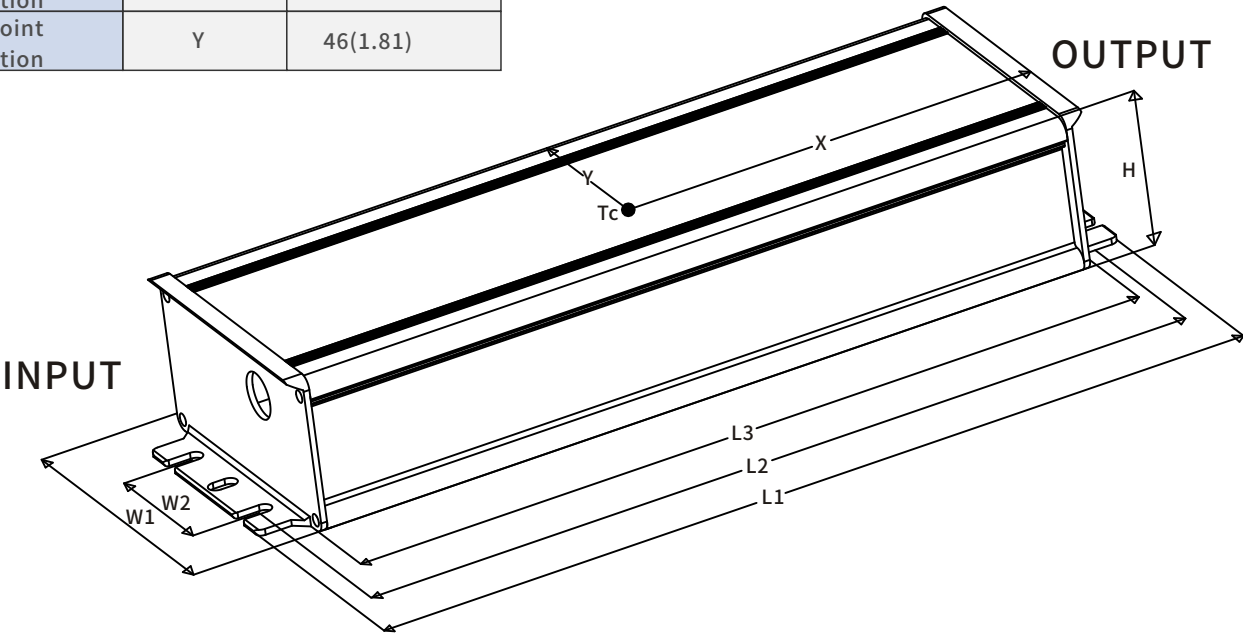

SS-150VP Series LED Driver



Assembly Tips

1. Dimming or AUX Power tinned connectors should be capped if not used to avoid dimming or AUX Power parts damage from external signals.

Package

- Outside carton dimension: $L \times W \times H = 495\text{mm} \times 385\text{mm} \times 162\text{mm}$;
- 14PCS/Carton;
- Net weight/Piece: 1kg;Gross weight/Carton: 15kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation


Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873—83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

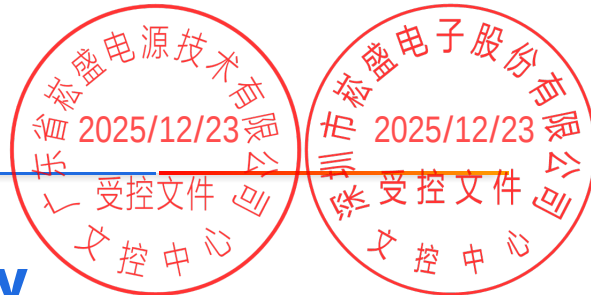

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2019/04/22	
V01	Update Programming Diagram	2020/03/21	
V02	Update Lifetime Curve	2020/06/01	
V03	Update Dim to Off Point	2021/02/24	
V04	Update Tinned Length Of Wire	2021/07/02	
V05	Update DIM Cable Color	2021/09/02	
V06	Increase The Content Of DALI-2	2022/01/18	
V07	Add Page Number	2023/02/01	
V08	Updated harmonics standards	2025/11/19	