
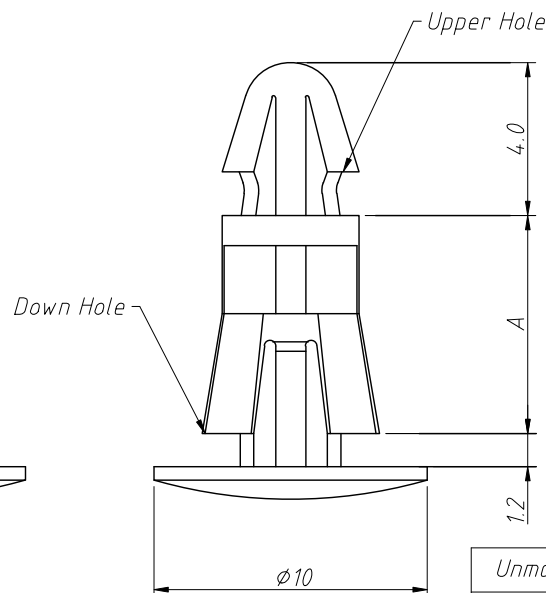
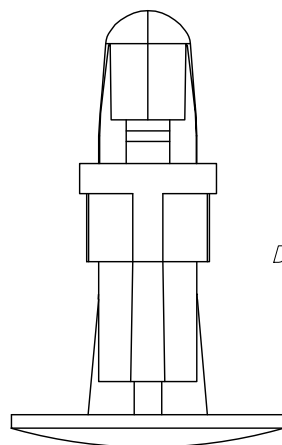
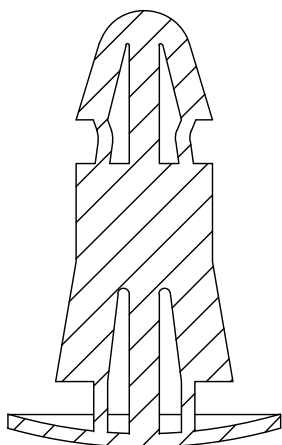


REV	SYM	Revision Record	Appr.	Date
V0	KLS08011	New Version Release	Song	2024-03-05

ITEM NO.	A	Upper Hole		Down Hole	
		Ø Hole	Thickness	Ø Hole	1.2~1.8
L-KLS8-0209-BSD-03	3.5	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-05	5.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-06	6.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-07	7.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-08	8.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-10	10.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-12	12.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-14	14.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8
L-KLS8-0209-BSD-18	18.0	Ø4.0	1.2~1.7	Ø5.5	1.2~1.8



<i>Unmarked</i>	$0 \sim 4$	$4 \sim 15$	$15 \sim 30$	$30 \sim 50$	$50 \sim 100$	$100 \sim$
<i>Tolerance</i>	± 0.15	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PCB spacing column	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS8-0209-BSD-XX
x.x	±0.30	SHEET SIZE	A4		 NingBo KLS ELECTRONIC CO.,L TD.
x.xx	±0.20	Draw:	Song	2024-03-05	
x.xxx	±0.10	Check:	Daniel	2024-03-05	