
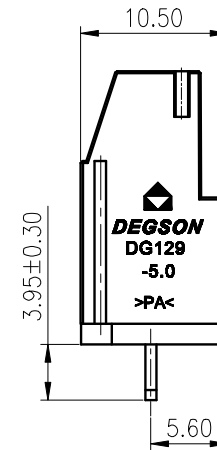
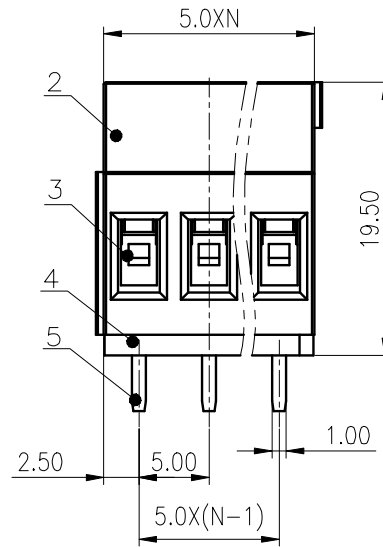
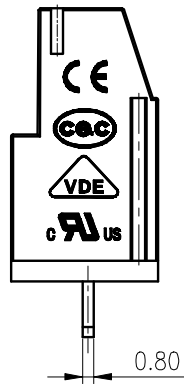
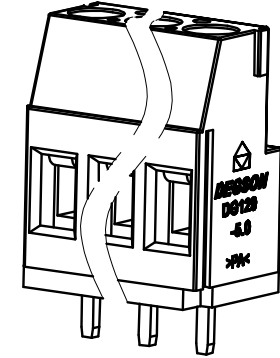


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	



5	Pin header	Copper alloy	Sn Plated
4	Cover	PA66	UL94V-0
3	Cage	Copper alloy	M3/Ni Plated
2	Housing	PA66	UL94V-0
1	Screw	Steel	M3/Zn Plated

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard: B C D

额定电压/电压/Rated Voltage(V)/Current(A) 300/20 / 300/10

IEC 标准/IEC Standard: III/2

过压类别/Overvoltage Category/污染等级/Pollution Degree

额定电压/电压/Rated Voltage(V)/Current(A) 250/20

工频耐压/Withstanding voltage(KV/1Min) AC2.0

螺丝扭矩/Torque Tightening(N·m/Lb.in) M3, 0.5/4.43

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 0.5~2.5/26~12


间距/Pitch(mm)/线数范围/Poles 5.0/N=02~24P

剥线长度/Stripping length(mm) 8

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

PCB LAYOUT

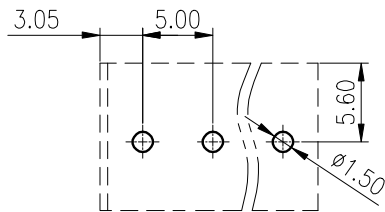

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET	1/1
-----	-----	-------------	------	------	----------	------------------------	------------	-------	-----

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: LanChH 2020.08.10 NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

CHKD: YuJZ 2020.08.10

DRFT: ChenZ 2019.04.04

DRAWING NO.: 10001396

REV TO

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1