

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C




D

E

F




G

H

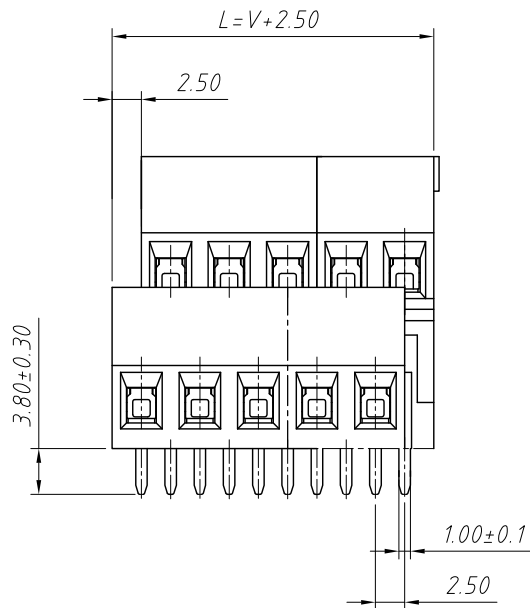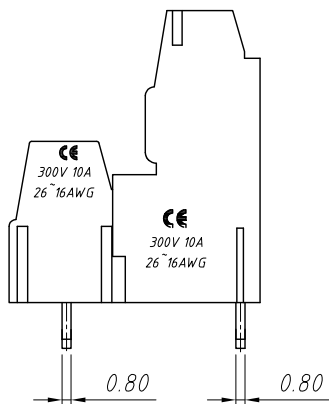

NOTES:
Rating:300V 10A
Insulation Withstands Voltage:
AC2000V/Min
Insulation Resistance:
≥500MΩ Or More At DC500V
Using Temperature Range: -40℃ ~ +105℃
Screw Torque Viaue:0.4N.m
Suitable Electric Wire: 16-26AWG

Order Information
L-KLS2-128IB-5.00-06P-4 C
RoHS
Terminal Block
Pitch:5.00mm
No.: of Pole 06
Color: 4- Green
Screw:C-Cross Screw

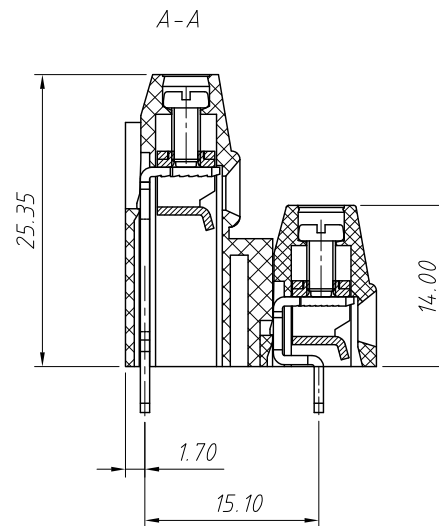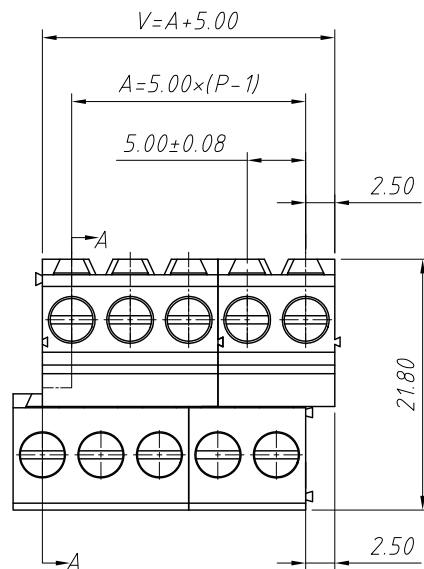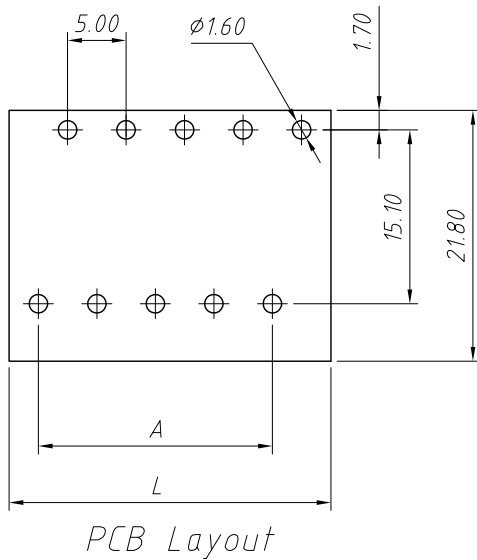

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Terminal Block Rising Clamp	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-128IB-5.00-06P-4C
x.x	±0.30	SHEET SIZE	A4	XX	
x.xx	±0.20	Draw:	Daniel	2023-03-30	
x.xxx	±0.10	Check:	Daniel	2023-03-30	



NingBo KLS ELECTRONIC CO.,L TD.