

Product Specification

Number: L-KLS7-KW10-3Z3L030

Name: Micro Switches

Customer: _____

Date: 2024-11-22

Customer Signature:




NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566







Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

Compi	Check	Review	Approva
Jenny	Jack.C		

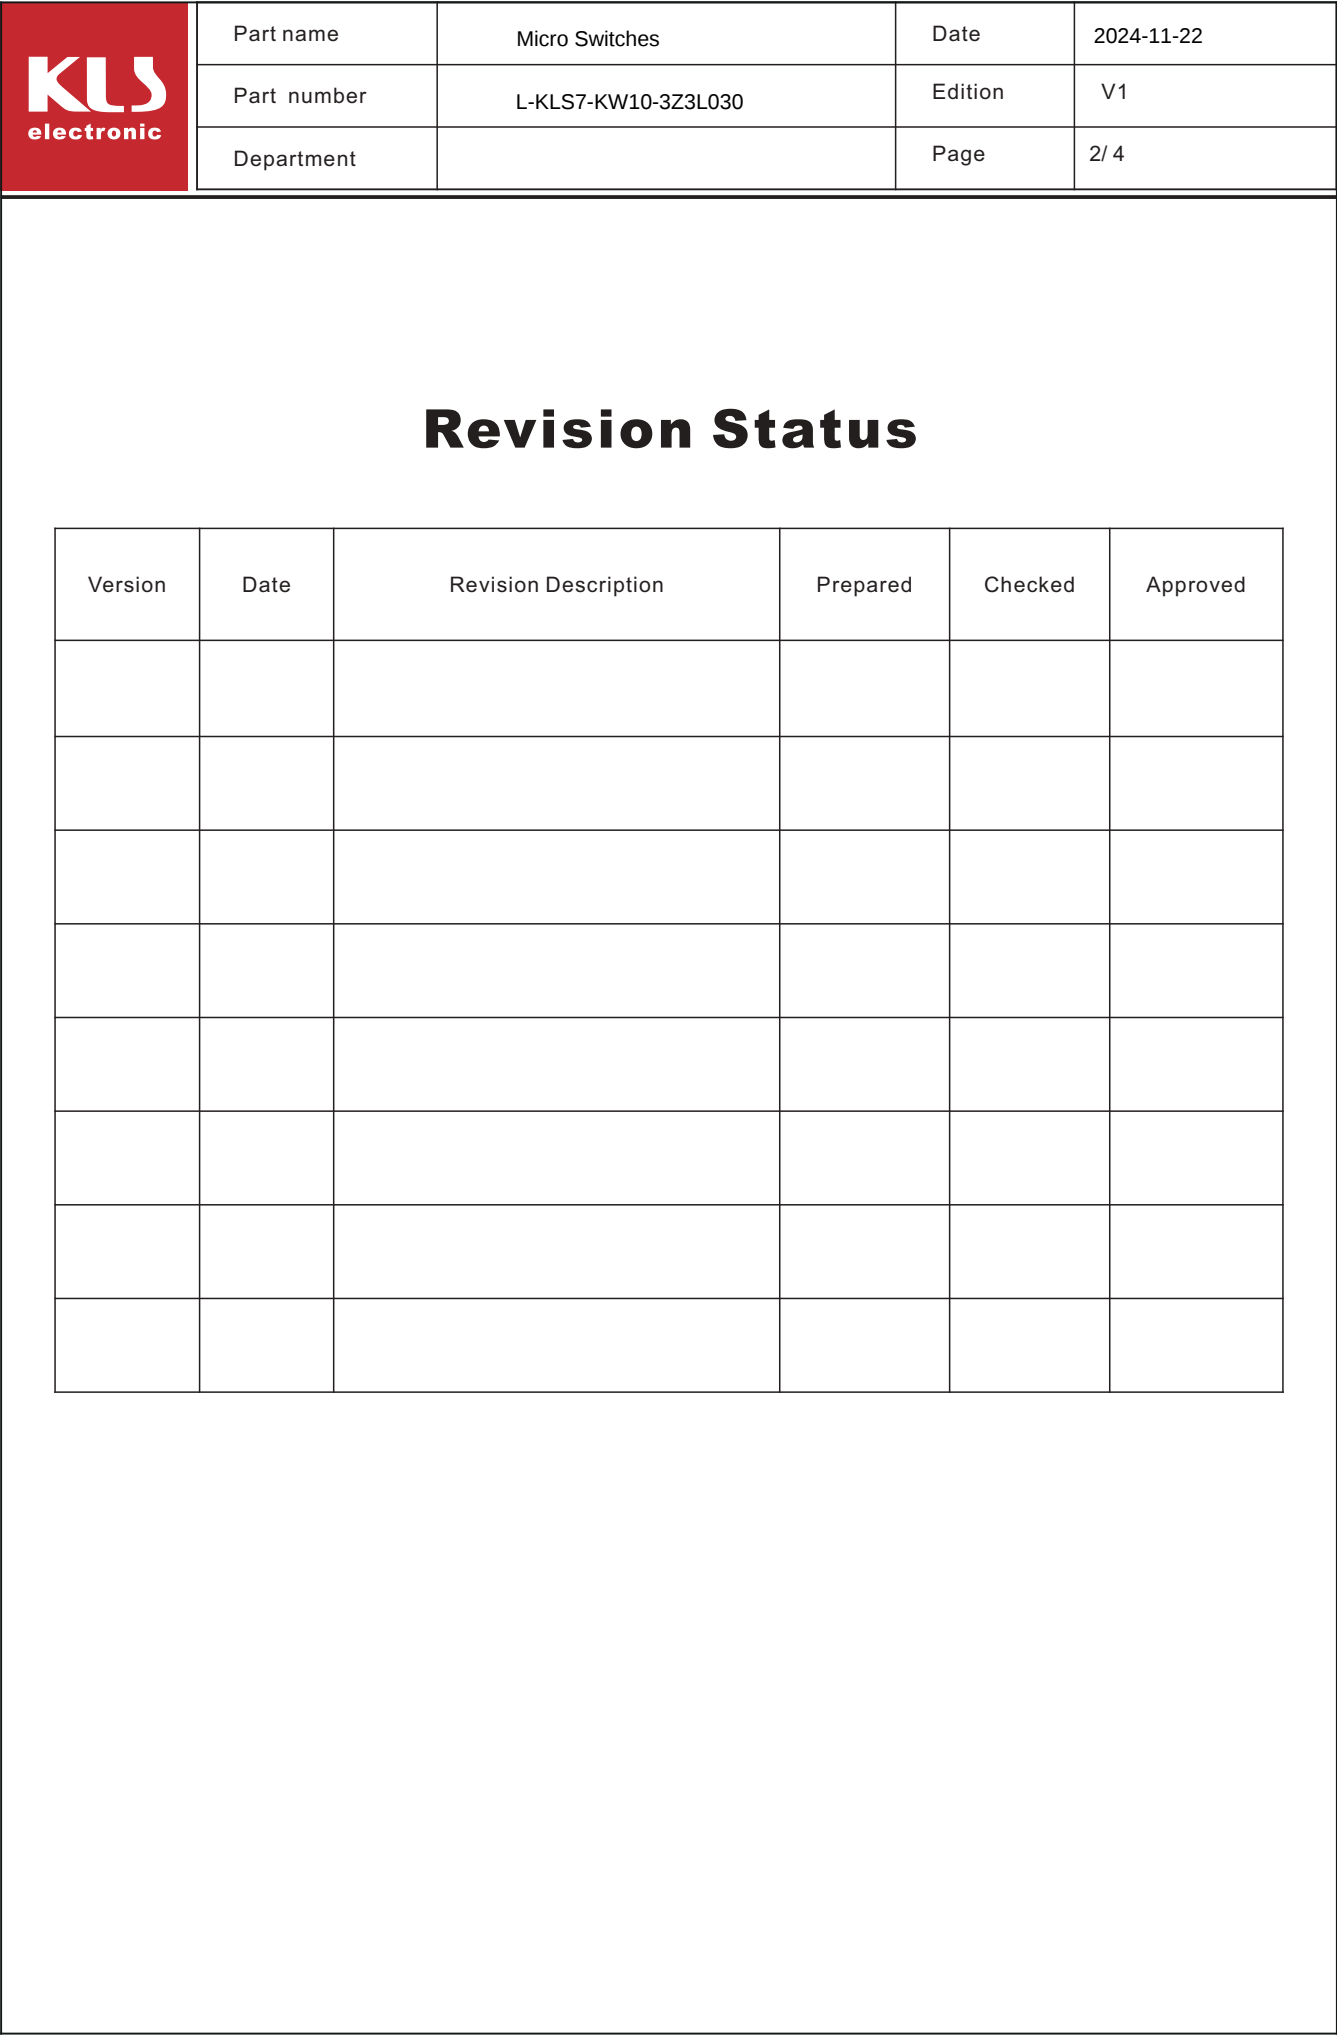

Part name	Micro Switches	Date	2024-11-22
Part number	L-KLS7-KW10-3Z3L030	Edition	V1
Department		Page	3 / 4

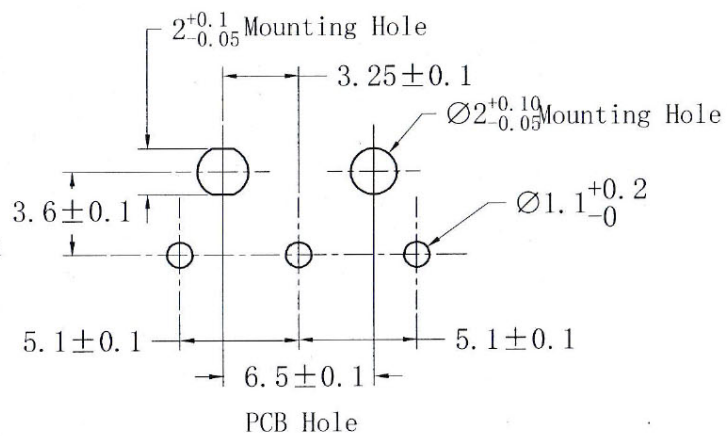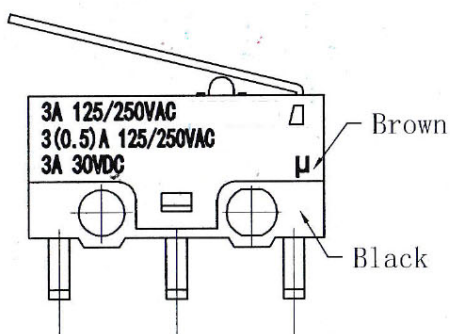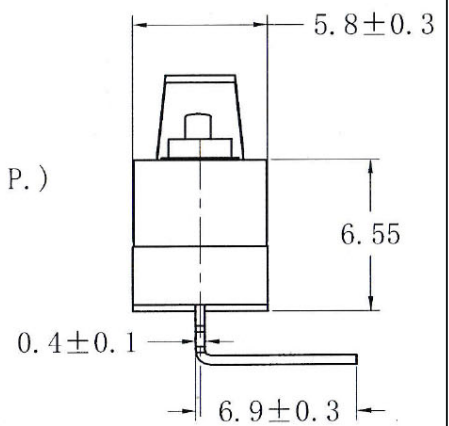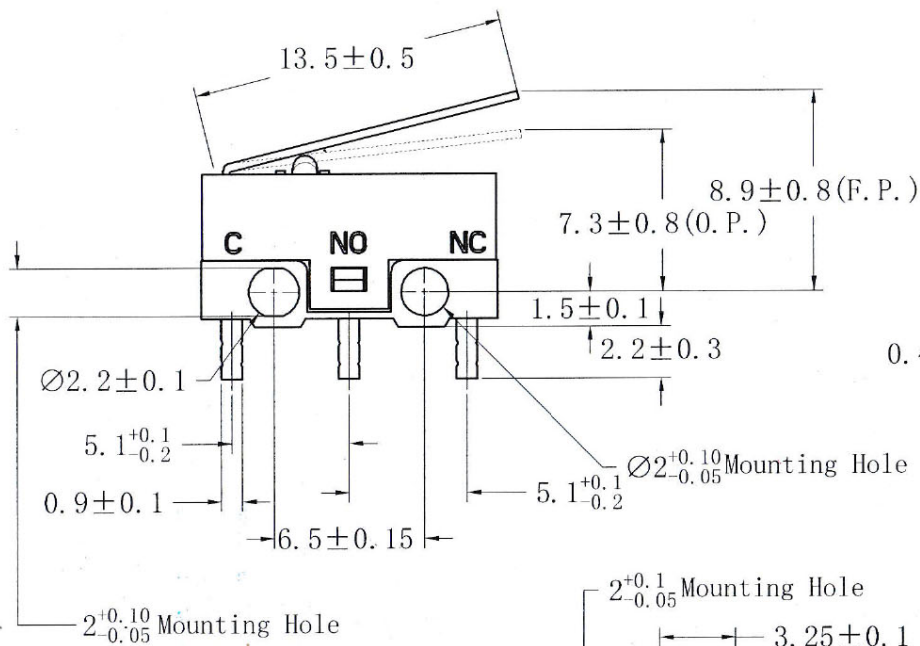

Part name	Micro Switches	Date	2024-11-22
Part number	L-KLS7-KW10-3Z3L030	Edition	V1
Department		Page	4 / 4

Mechanical Characteristics		
Item		Standard
OF	Operating Force	30±15gf
RF	Release Force	5gf min
OP	Operating Position	7.3±0.8mm
DT	Differential Travel	/
FP	Free Position	8.9±0.8mm
TTP	Total Travel Position	/
Circuit	COM NC NO SPDT	
Electrical Characteristics		
Load	3A 125/250VAC 3(0.5)A 125/250VAC 3A 30VDC	
Contact Resistance		100mohm Max.
Insulation Resistance		100Mohm Min.
Dielectric Strength(50-60HZ)	500VAC Between Terminals	
	1500VAC Between Terminals and Housing	
Other Characteristics		
Item		Standard
Mechanical Life		100,000cycles
Operating Temperature		-40℃ to +85℃
Protection class		IP40

Tolerance Unless Otherwise Specified
 $X. \pm 0.30$. $X \pm 0.2$. $XX \pm 0.15$ $\angle \pm 2^\circ$ (Unit:MM)