




REVISION RECORD				
REV	ECN	QTY	DESCRIPTION	DFT DATE
T1	009-0122	增加UL刻字参数		Mickey 11/07/09

Notes:


1. Pitch:5.08mm, Ploes:2-24P
2. Rated voltage/current:UL 300V 15A
- VDE 320V 12A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

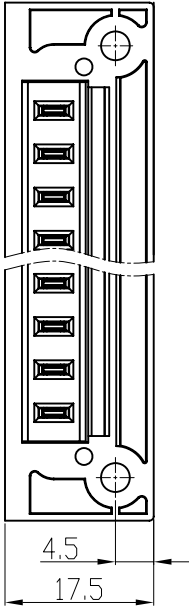

Pitch range in mm		Nominal dimension range in mm					
over	over	over	over	over	over	—	
6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	C	
6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	D	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

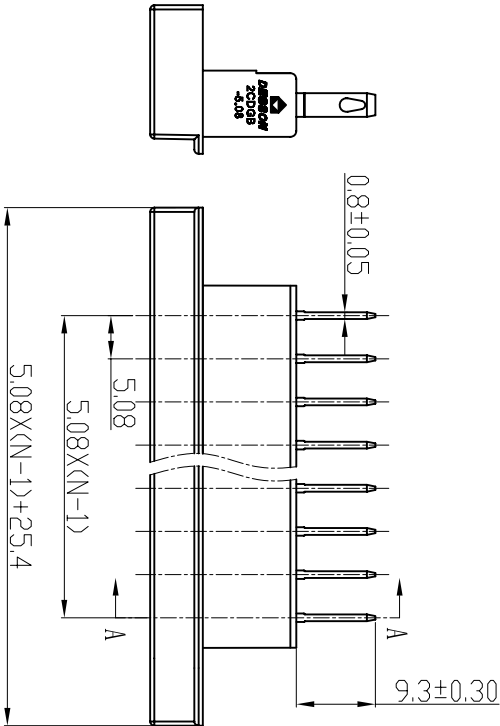

SECTION A-A

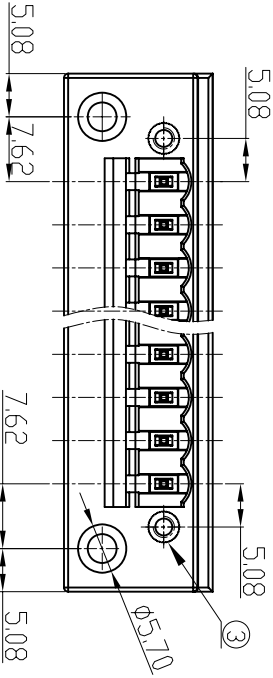

3	2DDG-Screw cap	S000000040	2	Brass	
2	2CDBG-5.08 PIN	1154B00010 (H)	XX	Brass	SnCe
1	2CDBG-5.08 HOUSING	1154A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS					
TOLERANCES EXCEPT AS NOTED		DETD L/N	CHKD	DATE	NAME DEGSON  ® DEGSON ELECTRONICS CO., LTD 宁波德正电子有限公司
MM		DATE	DATE	DATE	
APPLY		DATE			
ANGLES ± 1°		G.E			
FINISH:		DRAWING NO. 2CDBG-5.08-E01			
THIRD ANGLE PROJECTION		/PART NO.			
SCALE :		DD NDT SCALE DRAWING			
SHEET 1		OF 1			