

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Barrier Series





KLS2-45A-9.50 Series

Electrical

Voltage rating : 300V
Current rating : 20A
Wire range : 12-22AWG
Operation temperature : -40°C to +105°C
Torque : 4kg/cm
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC2000V/Min

MATERIAL

Housing : PA 66 UL94V-0
Terminal : Brass 0.8t, Tin plated
Screws : M4 Steel, Nickel Plated

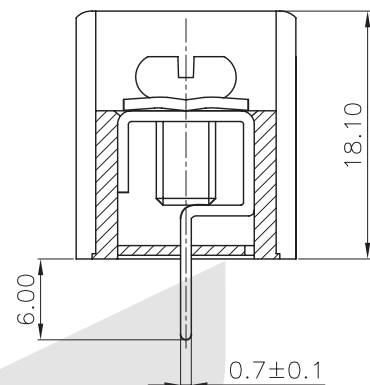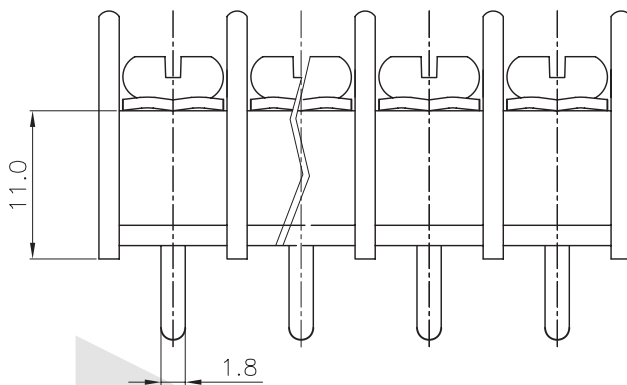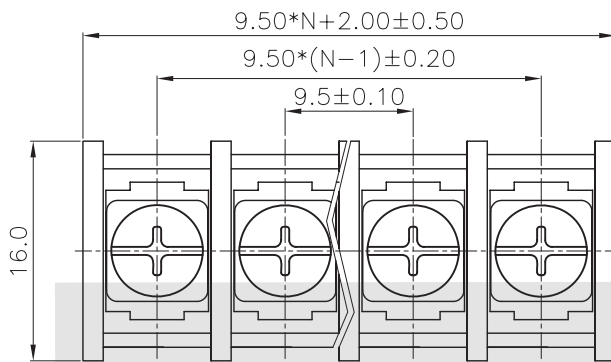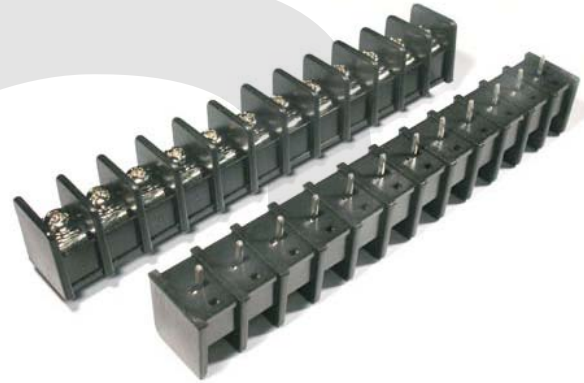

ORDER INFORMATION

Product NO.: KLS2-45A-9.50 XXP B

Pos. NO. _____

Series No. _____

Pitch 9.50=9.50mm _____

A=Mount Ends B=Barrier Ends

Pin Number _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

II

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Barrier Series

KLS2-45A-9.50 Series

Electrical




Voltage rating : 300V
Current rating : 20A
Wire range : 12-22AWG
Operation temperature : -40°C to +105°C
Torque : 4kg/cm
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC2000V/Min

MATERIAL

Housing : PA 66 UL94V-0
Terminal : Brass 0.8t, Tin plated
Screws : M4 Steel, Nickel Plated



II

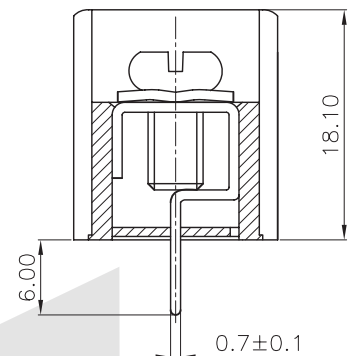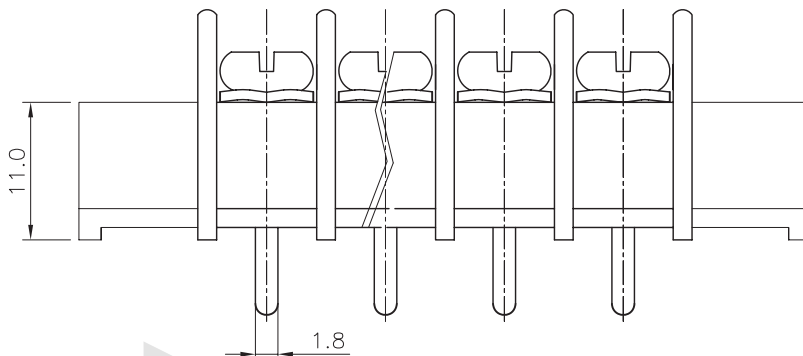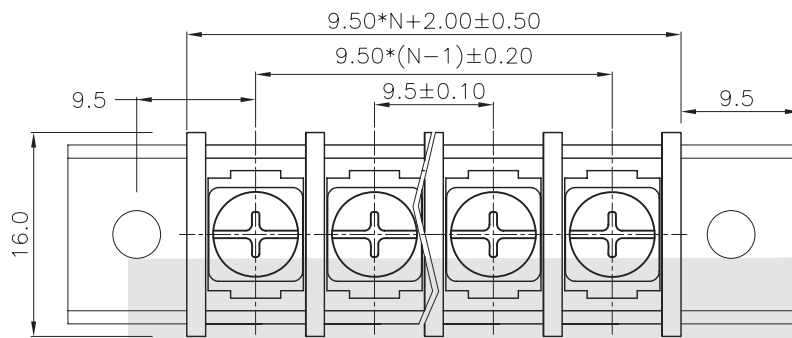

ORDER INFORMATION

Product NO.: KLS2-45A-9.50 XXP A

Pos. NO.

Series No.

Pitch 9.50=9.50mm

A=Mount Ends B=Barrier Ends

Pin Number

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information