

SPECIFICATION

受 控


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	2.8± 0.3KHz
2.2 Resonant Resistace	:	150 Ω max
2.3 Capacitance	:	130000pF± 30% at 100Hz
2.4 Input Voltage	:	30Vp-p max
2.5 Operating Temperature	:	-20~+50°C
2.6 Storage Temperature	:	-20~+60°C
2.7 Wires Length	:	2-80+5mm
3. DIMENSION	:	as per figure

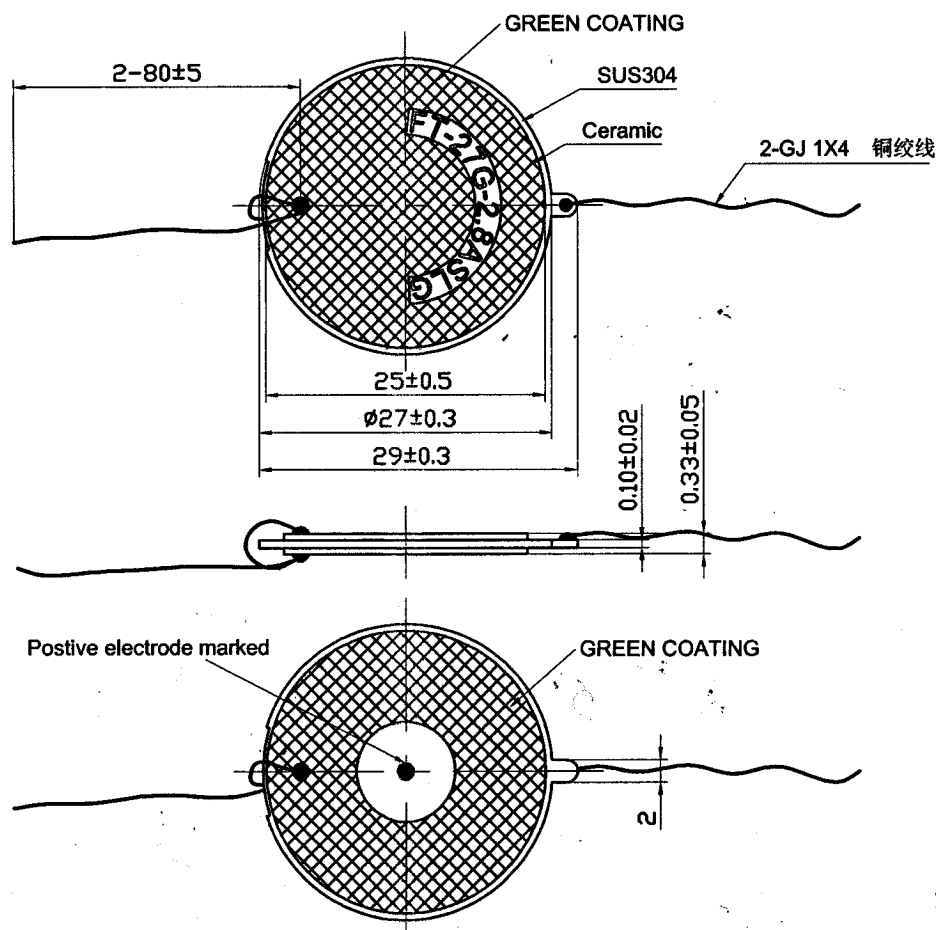

TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

汪逸

DESIGN

CHECKED

APPROVED

徐锦生

DATE

12.06.05

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

FT-27G-2.8ASLG-2408

DWG NO.

OEM2408G

KEPO CO.,LTD.

CUSTOMER

CUSTOMER NO.

VER

1.3

SCALE

UNIT

mm

SHEET

TEL: (+86)574-88370330
FAX: (+86)574-88370329