


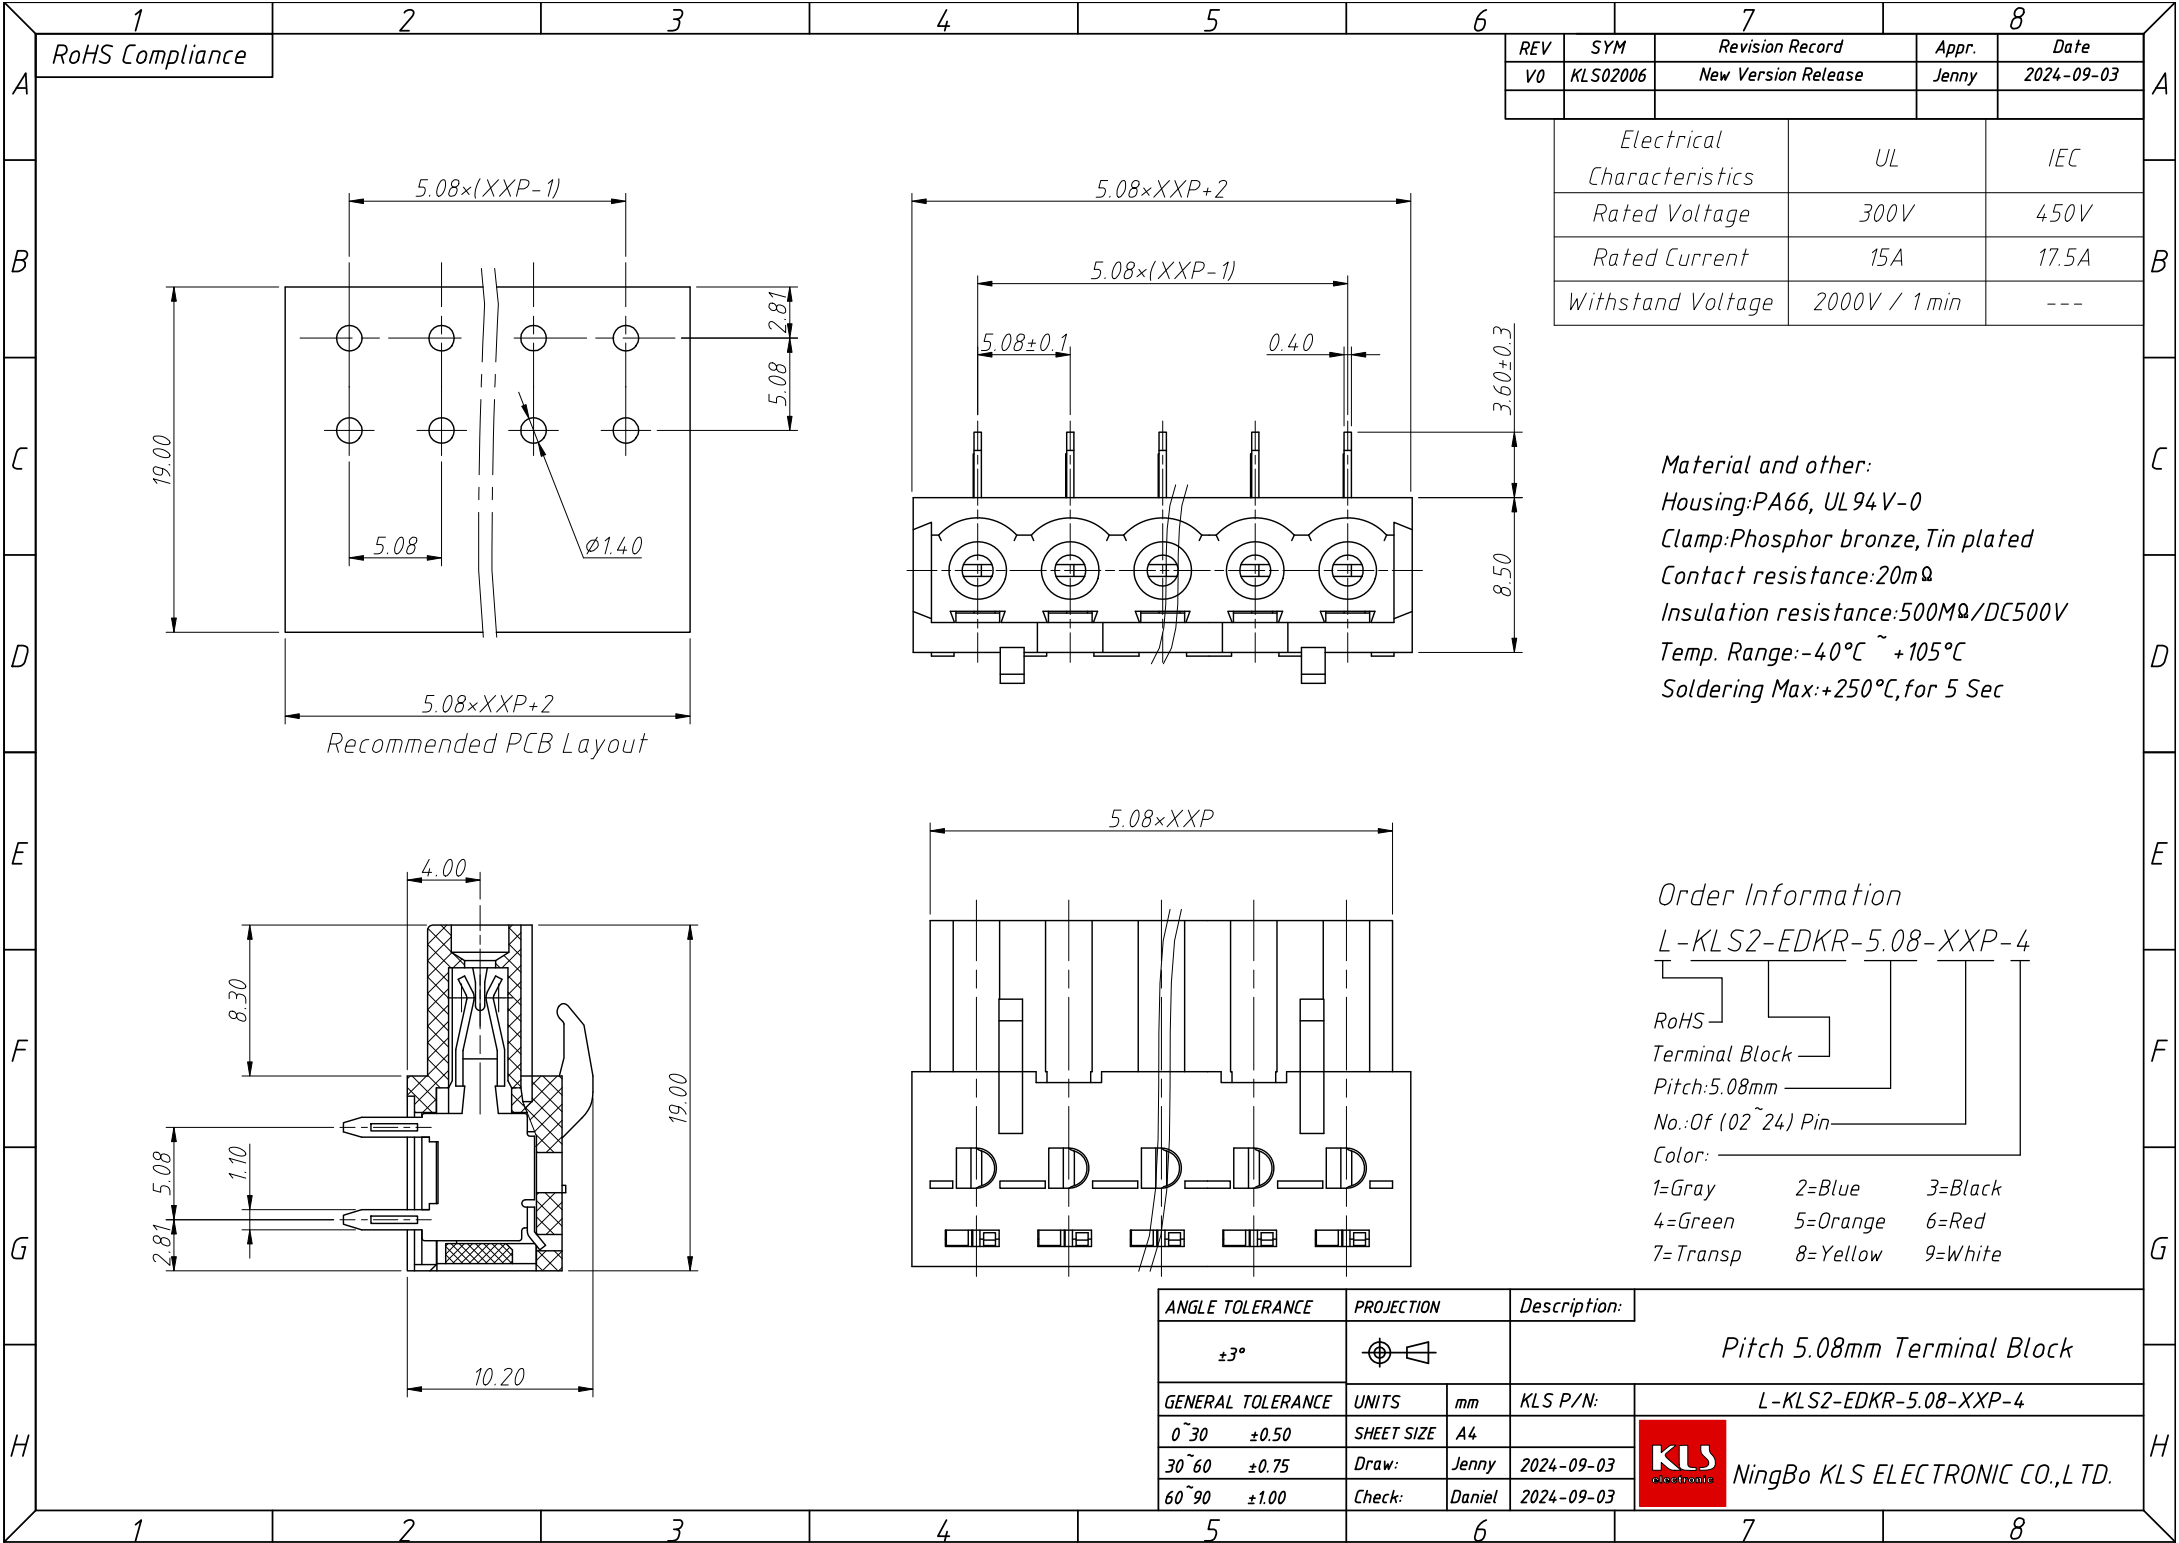

REV		SYM	Revision Record		Appr.	Date
V0		KLS02006	New Version Release		Jenny	2024-09-03
Electrical Characteristics			UL		IEC	
Rated Voltage			300V		450V	
Rated Current			15A		17.5A	
Withstand Voltage			2000V / 1 min		---	

Material and other:
Housing:PA66, UL94 V-0
Clamp:Phosphor bronze,Tin plated
Contact resistance:20mΩ
Insulation resistance:500MΩ/DC500V
Temp. Range:-40℃ ~ +105℃
Soldering Max:+250℃,for 5 Sec

Order Information
L-KLS2-EDKR-5.08-XXP-4

RoHS
Terminal Block
Pitch:5.08mm
No.:Of (02~24) Pin
Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				Pitch 5.08mm Terminal Block	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
0~30		± 0.50	A4	L-KLS2-EDKR-5.08-XXP-4	
30~60		± 0.75	Draw:	Jenny	2024-09-03
60~90		± 1.00	Check:	Daniel	2024-09-03



NingBo KLS ELECTRONIC CO.,LTD.