RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS17048	New Version Release	Jenny	2024-04-07

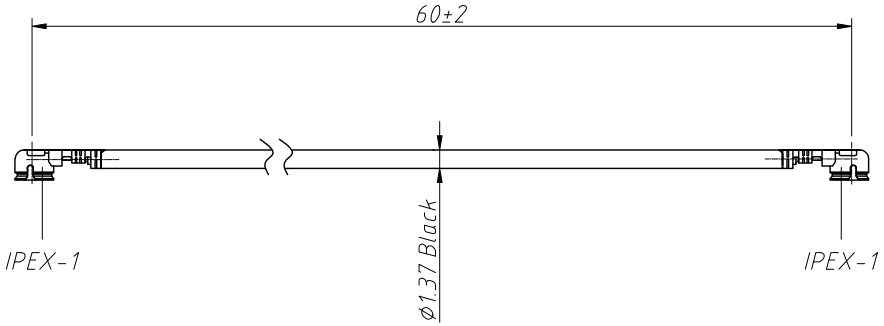

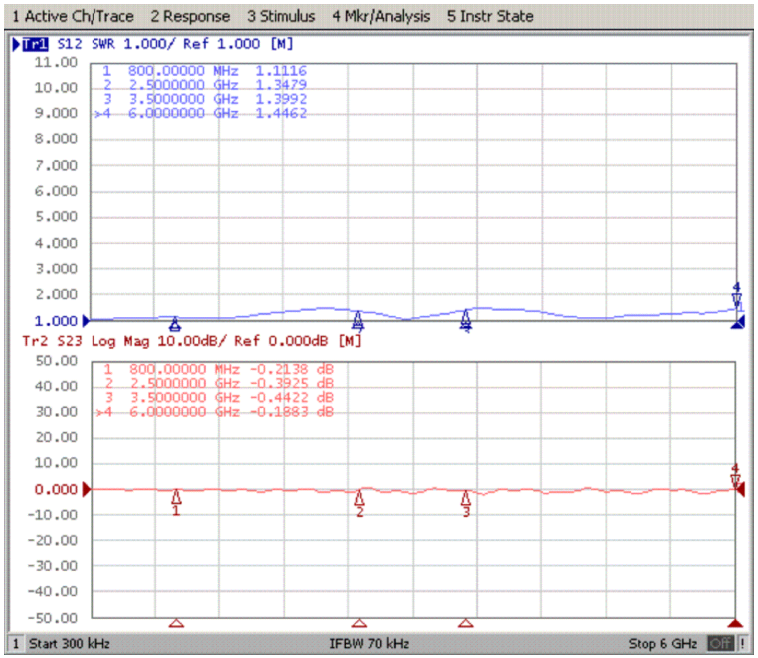

Material:
Connector:Brass, Gold Plating

Electric:
Frequency Range:0~5G
Impedance:50 OHM
Vswr:≤1.5 MAX
Conduction Impedence:0.5 OHM
Insulation Resistance:≥5000MΩ
Max power:10 W
Operating Voltage:335V MAX
Mechanical Durability:500 Cycles
Withstand Voltage:1000Vrms
Temperature:-35°~+80°

Notes:
1.The finished product requires 100% electrical testing
2.The product parts must not have scratches,deformation, oil stains or other defects
3.Conduction test requires a voltage withstand of over 500V and must be conducted
4.Salt Spray Test:48H Min

ANGLE TOLERANCE	PROJECTION		Description:	
±5°			IPEX1 double headed coaxial connector L=60mm	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-RFCA16-50Ω-OD1.37-60MM-B
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Jenny	2024-04-07	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2024-04-07	