


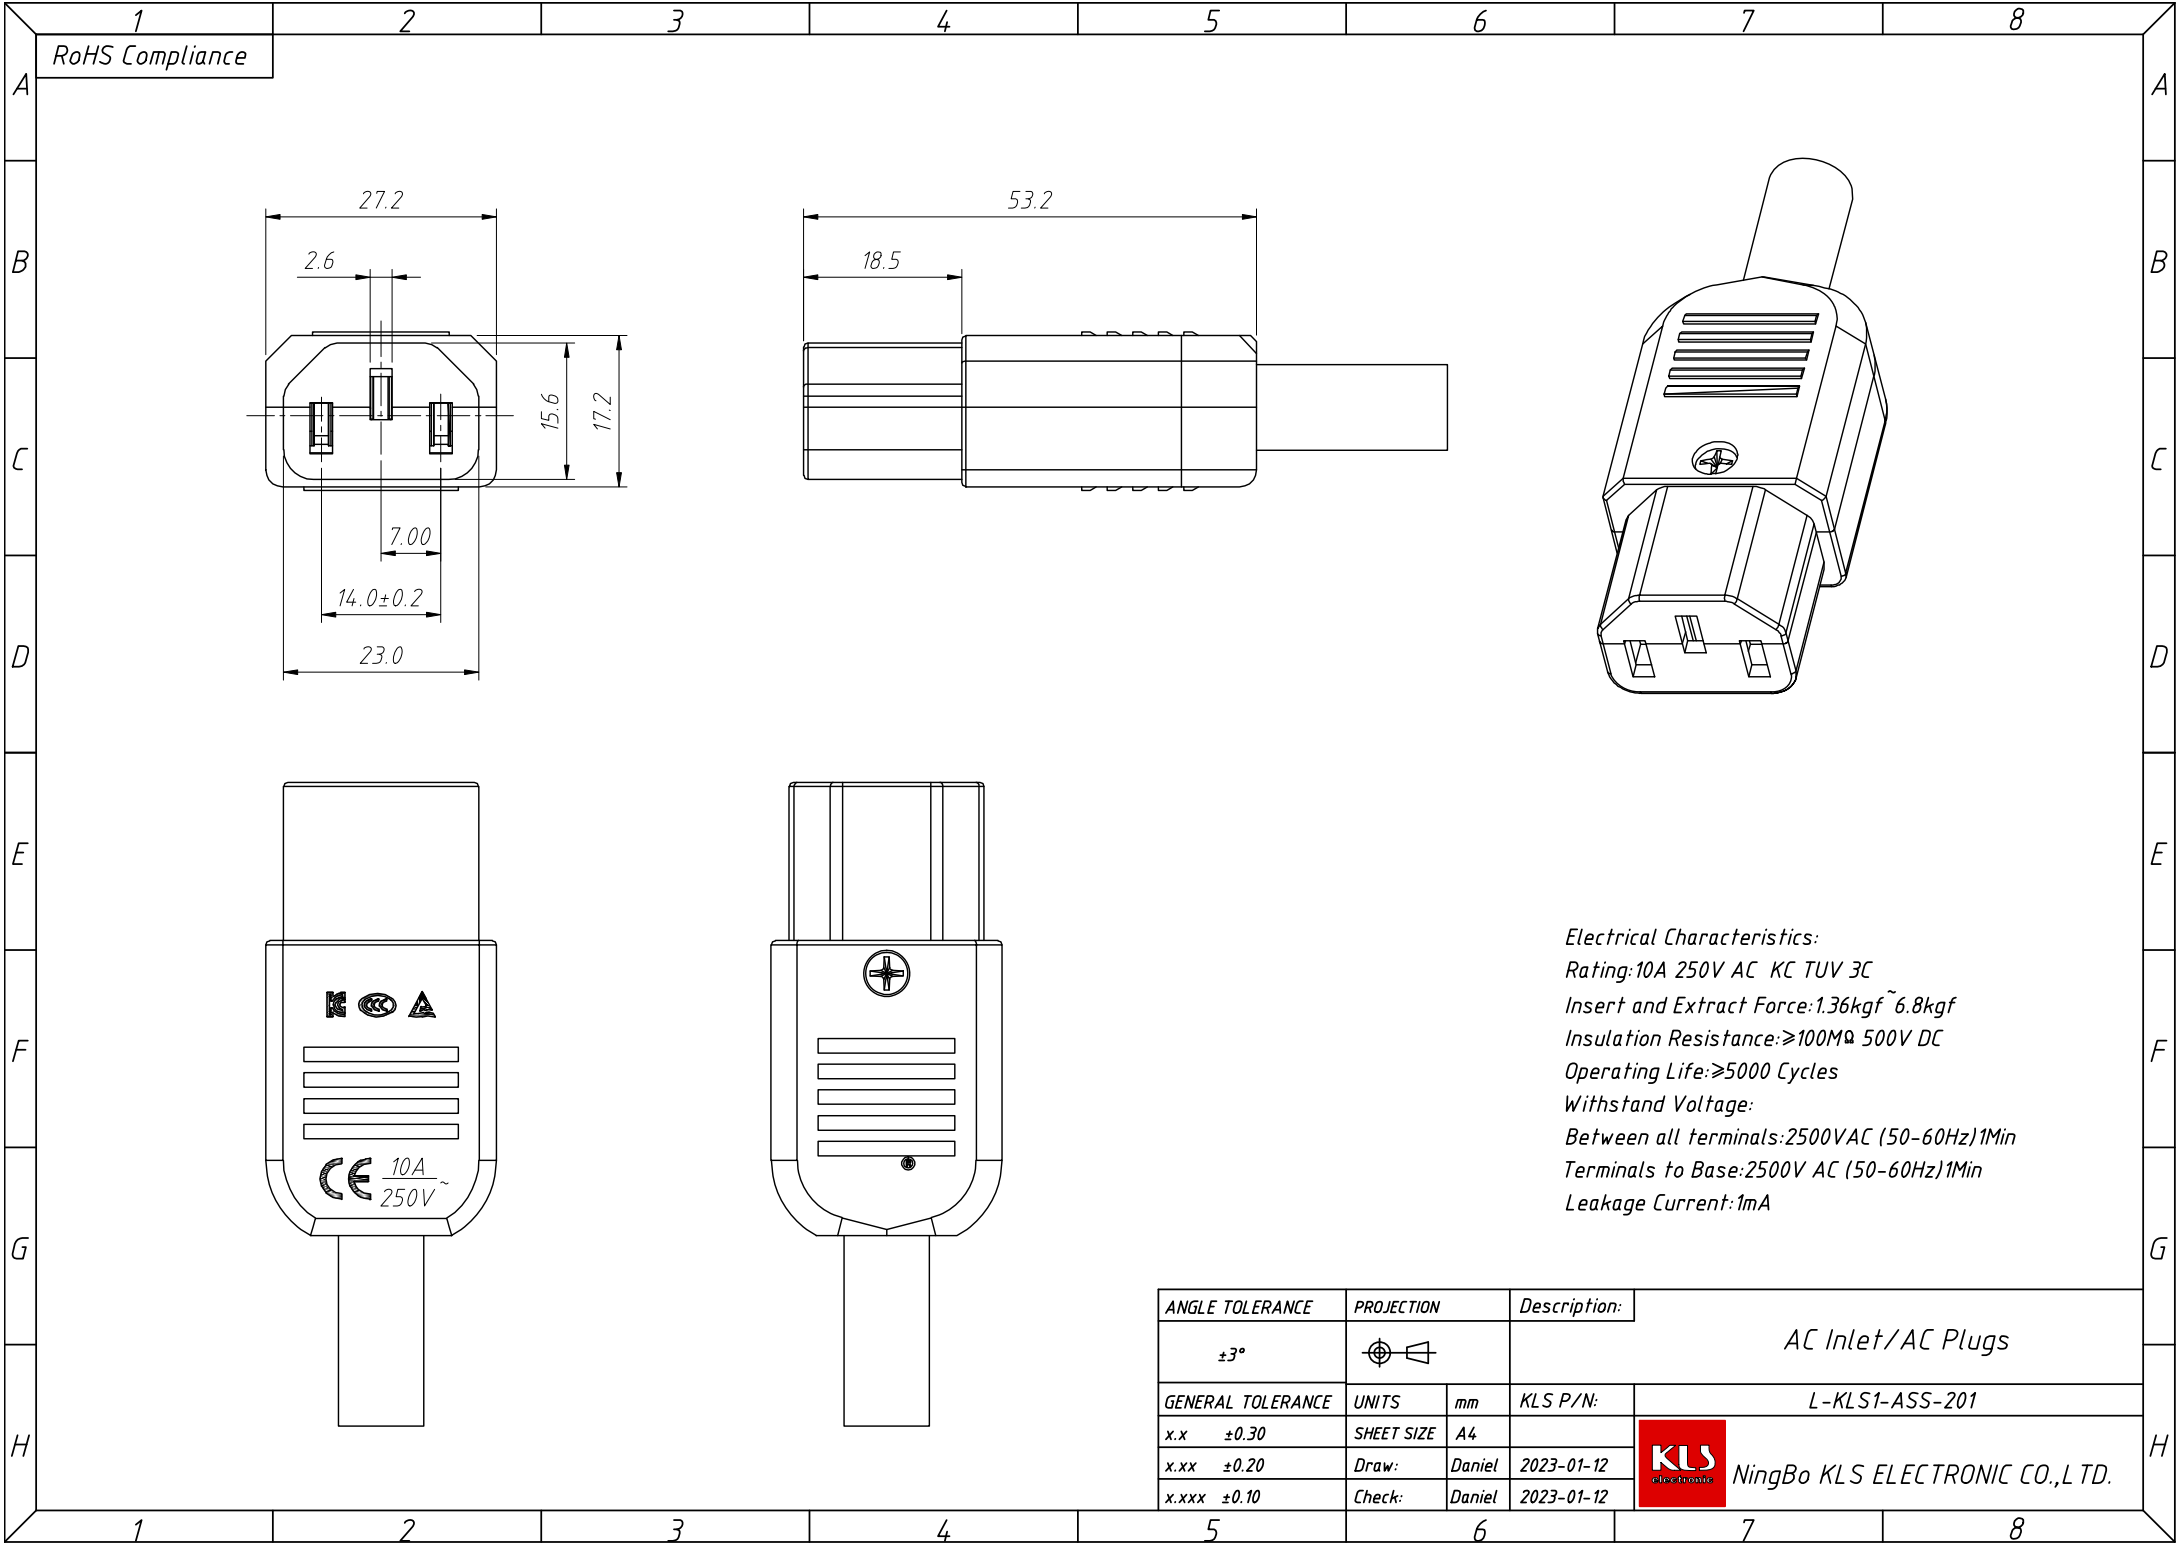

Electrical Characteristics:
Rating:10A 250V AC KC TUV 3C
Insert and Extract Force:1.36kgf~6.8kgf
Insulation Resistance:≥100MΩ 500V DC
Operating Life:≥5000 Cycles
Withstand Voltage:
Between all terminals:2500VAC (50-60Hz)1Min
Terminals to Base:2500V AC (50-60Hz)1Min
Leakage Current:1mA

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			AC Inlet/AC Plugs	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
x.x	±0.30	SHEET SIZE	A4	L-KLS1-ASS-201
x.xx	±0.20	Draw:	Daniel	2023-01-12
x.xxx	±0.10	Check:	Daniel	2023-01-12

NingBo KLS ELECTRONIC CO.,LTD.