We Power Your Technology

Primary Lithium Battery CR14505H

3.0V [Li-MnO_2]

AA-size spiral cell

BENEFITS

- High Voltage Response, Stable During Most of the Lifetime of the Application
- Energy Density up to 830Wh/L
- Wide Operating Temperature Range (-40℃~+70℃)
- Low Self-discharge Rate (less than 1% per year after 1 year of storage at +25℃)

KEY FEATURES

- Optimized Battery Structure, Full Discharge Capacity
- Long Endurance
- No Passivation
- RoHS

MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

References Data

Electrical characteristics

Open circuit voltage (at 23±2°C)	≥3.00V
Nominal capacity	1600mAh

(At +25°C, battery discharged at continuous current 10mA until voltage reaches cut-off voltage 1.5V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current	1500mA

(At +25°C, 1.5V cut-off, battery discharged for minimum 50% of rated capacity.)

Maximum pulse discharge current	2000mA

(Maximum pulse discharge current is 2000mA. Discharge capacity of the battery will change with the pulse characteristics and ambient temperature as well as storage situation. For more detail, please inquiry HCB.)

Storage (recommended)	≤+30°C
(For more severe conditions. Consult HCB)	≤75%RH
Operating temperature range	-40°C~+70°C

(Operation above ambient temperaure may lead to reduced capacity and lower voltage readings at the beginning of pulses, consult HCB.)

HCB BATTERY CO., LTD
Add：37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China
P.O.：430040
Tel：+86(0)27 83248452
Fax：+86(0)27 83248455
Email：haocheng@cnhcb.com
Web：www.cnhcb.com
No.: HCB-MKT.PM-S[V2.0 2024 04]

Primary Lithium Battery
CR14505H

3.0V [Li-MnO_2]

AA-size spiral cell


Physical characteristics	
Diameter	14.2±0.3mm
Height	50.0±0.5mm
Typical weight	17.0g
Li metal content	0.46g

MSDS as per request

Diode (1N4007, 1N5819)


PTC (SRS175...)

Tag, wire, connector, etc. available

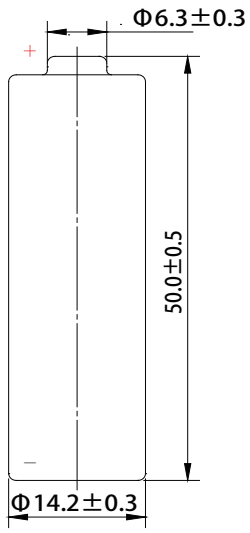


Dimensions in mm（GB1804-m）


1. Typical discharge profiles at 23±2°C (at mid-discharge)

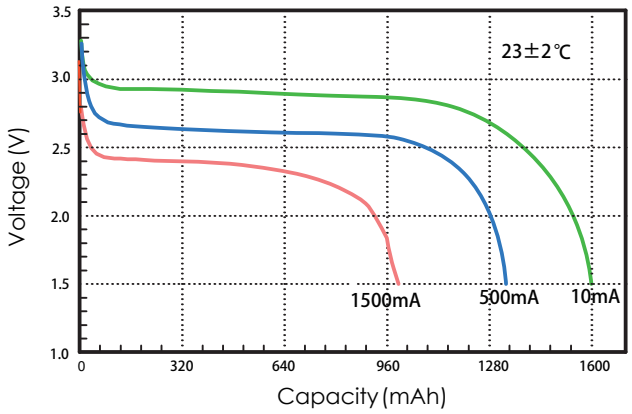

2. Voltage plateau versus Current and Temperature (at discharge stable phase)

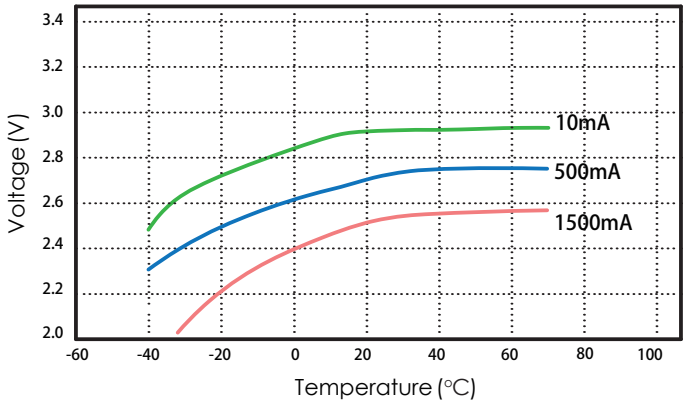

3. Storage characteristics

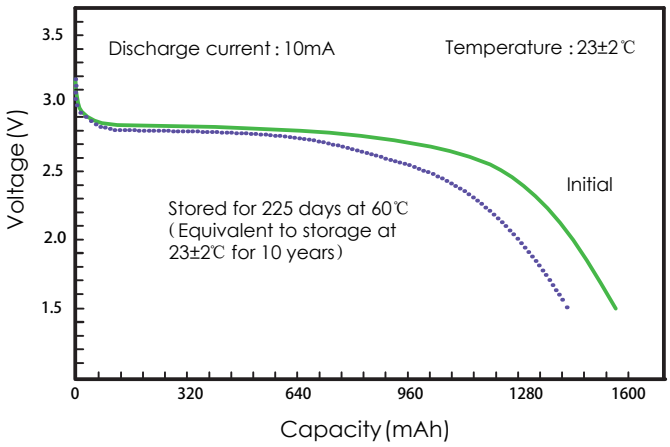

WARNING:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries . Cell and battery designs/specifi -cations are subject to modification withour notice.
Contact HCB for the latest information

HCB BATTERY CO., LTD

Add：37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China

P.O.：430040
Tel：+86(0)27 83248452
Fax：+86(0)27 83248455

Email：haocheng@cnhcb.com
Web：www.cnhcb.com

No.: HCB-MKT.PM-S[V2.0 2024 04]