We Power Your Technology

Primary Lithium Battery ER14505

3.6V Lithium-thionyl chloride[Li-$SOCl_2$]
AA-size bobbin cell



Benefits

- High and Stable Voltage
- Energy Density up to 590Wh/kg
- Low Self-discharge Rate (less than 1% per year after 1 year of storage at +25℃)
- Wide Operating Temperature (-55℃~+85℃)

Key Features

- Stainless Steel Container
- Glass to Metal Hermetic Sealing
- Non-flammable Electrolyte
- UL(MH10060) and UN38.3 Certified

Main Applications

- Security System
- Smart Metering
- RFID / IoT System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

New cell:*
Refer to the cells that are stored within two months at no higher than +25℃.

Electrical Characteristics

Nominal voltage	3.6V
Nominal capacity	2700mAh

(At +25°C, battery discharged at continuous current 1mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current	50mA

(New cell*, at +25°C, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity.)

Maximum pulse discharge current	150mA

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of nominal capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions.)

Storage temperature (recommended)	≤30°C
Storage humidity ((recommended)	≤75%RH
Operating temperature range	-55°C~+85°C


(Operation above ambient temperature may lead to reduced capacity and lower voltage readings at the beginning of pulses.)

HCB BATTERY CO., LTD
Add：37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China
P.O.：430040
Tel：+86(0)27 83248452
Fax：+86(0)27 83248455
Email：haocheng@cnhcb.com
Web：www.cnhcb.com
No.: HCB-MKT.PM-S[V2.2 2025 03]

Primary Lithium Battery
ER14505


3.6V Lithium-thionyl chloride[Li-$SOCl_2$]
AA-size bobbin cell

Physical Characteristics	
Diameter	Max 14.5mm
Height	Max 50.5mm
Weight	20.0g

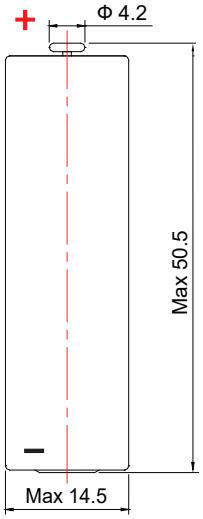


Dimensions in mm

1. Typical discharge profiles at 25°C (median of capacity)

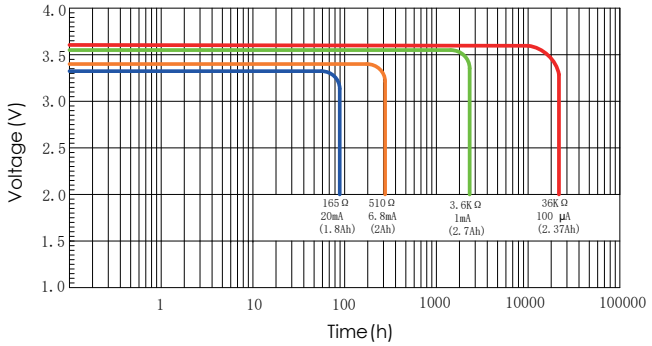

2. Voltage plateau versus Current and Temperature (at the mid-discharge)

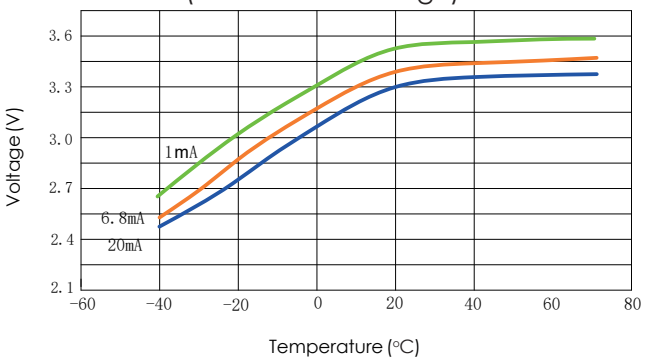


WARNING:

- Do not short circuit
- Do not recharge
- Do not puncture
- Do not crush
- Do not dismantle
- Do not incinerate
- Do not mix new and used batteries
- Do not heat above 100°c

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries . Cell and battery designs/specif -ications are subject to modification without notice.
Contact HCB for the latest information

3. Storage characteristics

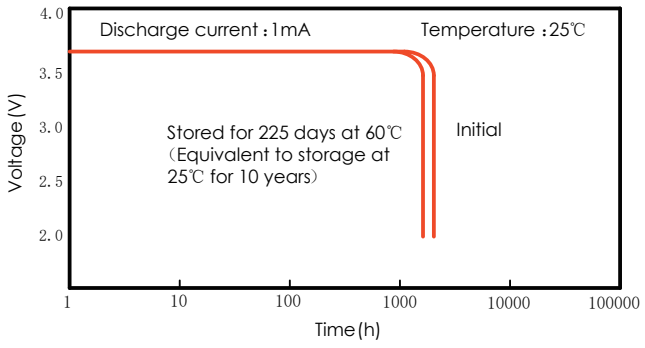

HCB BATTERY CO., LTD
Add：37 Tianyuan Street, Dongxihu District, Wuhan, Hubei, China
P.O.：430040
Tel：+86 (0) 27 83248452
Fax：+86 (0) 27 83248455
Email：haocheng@cnhcb.com
Web：www.cnhcb.com

Version No.: HCB-MKT. PM-S[V2.2 2025 03]