

© 2023 TE Connectivity. All Rights Reserved.

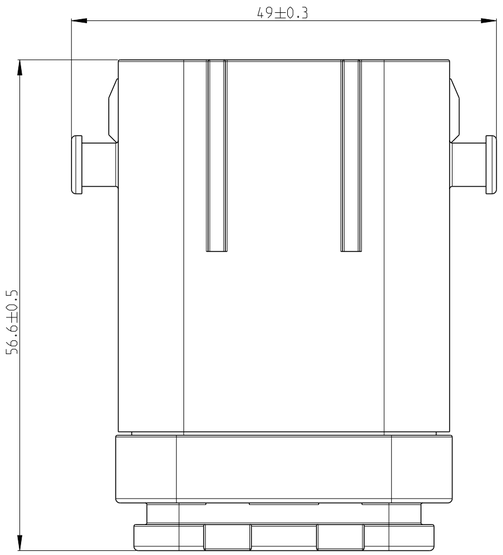


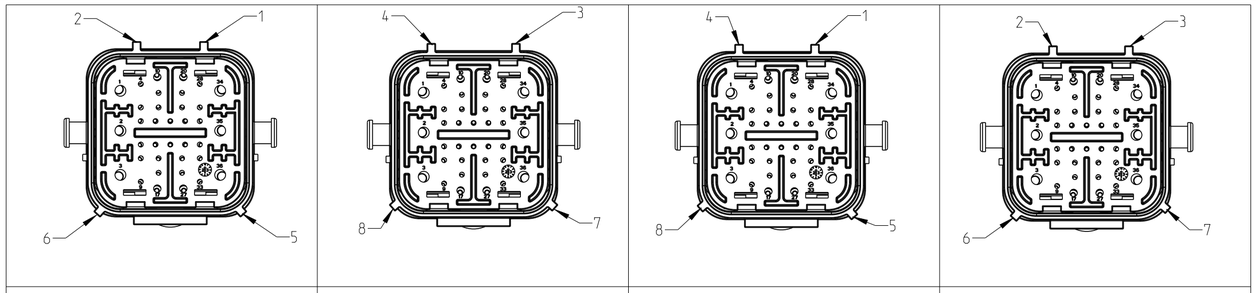



CODING A	CODING B	CODING C	CODING D


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	10JAN2023	J.S	Z.Z
	A1	ECN-24-258780	03APR2024	J.S	Z.Z
	A2	ECN-25-359904	18DEC2025	J.S	C.W
	A3	ECN-26-409006	08OCT2026	K.M	C.W

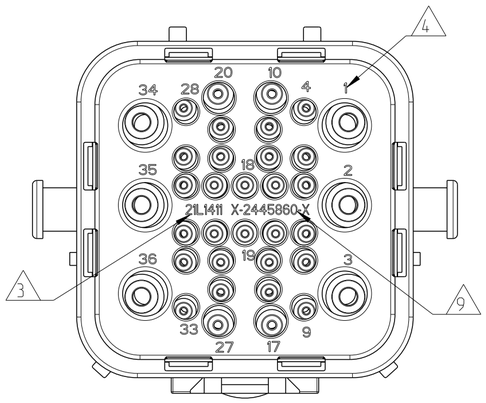

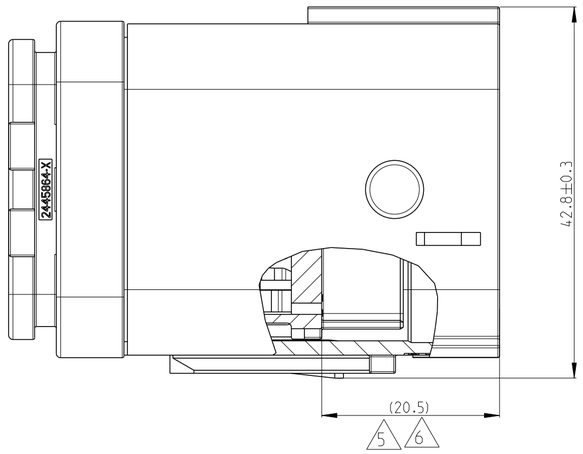

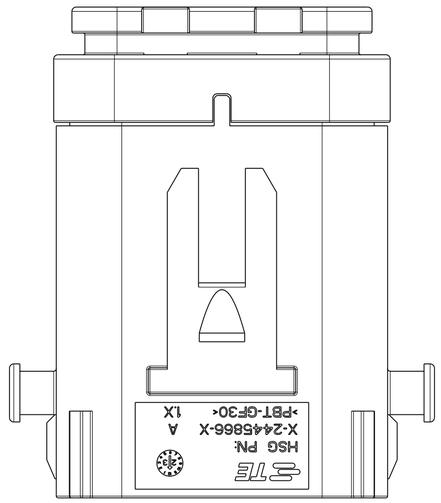

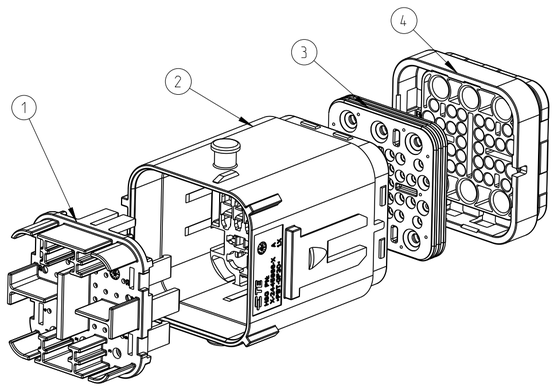

NOTE:

1. THIS REC HSG ASSEMBLY MATES WITH PLUG ASSEMBLY PN 2445859-X (X=1, 2, 3, 4 FOR VARIOUS CODE).

△2 FOR FLANGE VERSION, NEED MATE WITH FIX RING PN 2366517-X.SEE DRAWING 2366517 FOR APPLICABLE WALL THICKNESS.

△3 DATE CODE: INDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS(21=2021)
MONTH: THIRD DIGIT , EXCLUDING I , A=JAN, B=FEB, C=MARCH...(M=DECEMBER)
DAY: FOURTH AND FIFTH DIGITS(14=14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS(11=11AM)

△4 IDENTIFICATION FOR CABLE PINOUT.

△5 TPA SEATED ON PRE-LOCK POSITION FOR DELIVERY.

△6 PULL TPA TO PRE-LOCK BEFORE TERMINAL INSERTION IN CASE OF TPA BEING HIT TO END-LOCK POSITION.

7. REFER TO 114-151006 FOR DT SIZE 12 TERMINAL APPLICATION SPECIFICATION.
REFER TO 114-151001/114-151000 FOR DT SIZE 16 TERMINAL APPLICATION SPECIFICATION.
REFER TO 114-151003 FOR DT SIZE 20 TERMINAL APPLICATION SPECIFICATION.
APPLICABLE TERMINAL PART NUMBERS AND WIRE SIZE:

TERMINAL PN	WIRE SIZE (MM2)	INSULATION WIRE (MM)	PINOUT NUMBER
12#	4.0-6.0	Ø3.4-Ø4.3	1.2.3.34.35.36
16#	0.75-2.5	Ø1.7-Ø3.0	10.17.20.27
20#	0.5-1.5	Ø1.4-Ø2.4	OTHER PINS

△8 FOR FLANGE VERSION THE FACIAL SEAL SEATED IN THE RIGHG POSITION WITH CORRECT DIRECTION.

△9 LASER PRODUCT PN. SUCH AS "--1"MEANS 2445860-1. "1--1" MEANS 1-2445860-1.

QTY. REQUEST PER ASSY				COLOR	MATERIAL	DESCRIPTION	ITEM NO
1	-	-	-	BLUE	PBT-GF30	REAR CAP	4
-	1	-	-	GREEN			
-	-	1	-	GREY			
-	-	-	1	BLACK			
1	1	1	1	RUST RED	VMQ	GROMMET	3
1	-	-	-	BLUE	PBT-GF30	HOUSING CODING D	2
-	1	-	-	GREEN		HOUSING CODING C	
-	-	1	-	GREY		HOUSING CODING B	
-	-	-	1	BLACK		HOUSING CODING A	
1	1	1	1	YELLOW	PBT-GF30	TPA	1
A	A	A	A	REVISION OF EACH ASSY PN			
--4	--3	--2	--1	TE ASSEMBLY PN			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH -

DWN J.SHANG 10JAN2023
CHK C.WAN 10JAN2023
APVD Z.ZHOU 10JAN2023
PRODUCT SPEC 108-101662
APPLICATION SPEC 114-32209
WEIGHT -


TE Connectivity


NAME NTS 36P REC HSG ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2445860	-


CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 2 | REV A3

© 2023 TE Connectivity. All Rights Reserved.

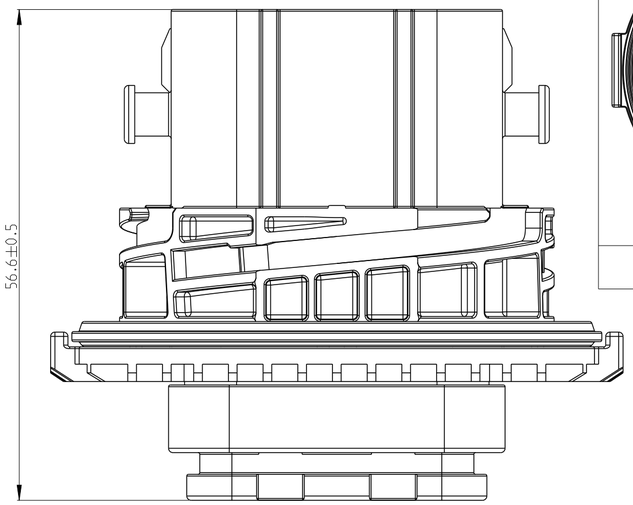





CODING A



CODING B




CODING C





CODING D

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

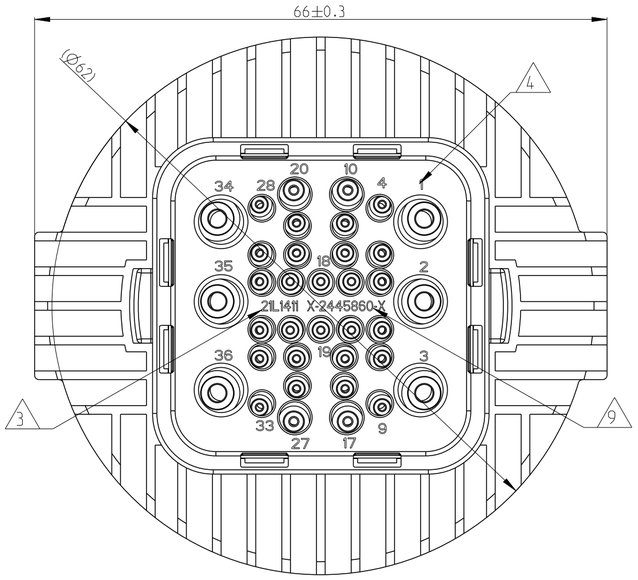


A3

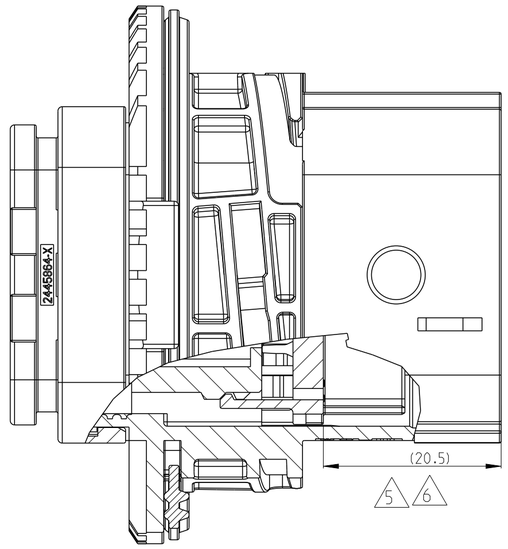

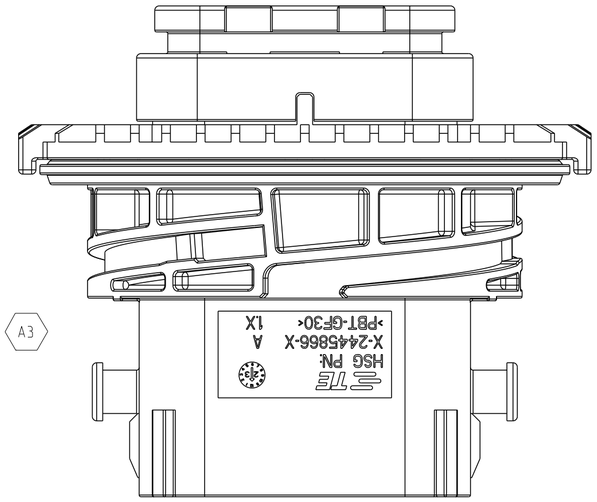

A3

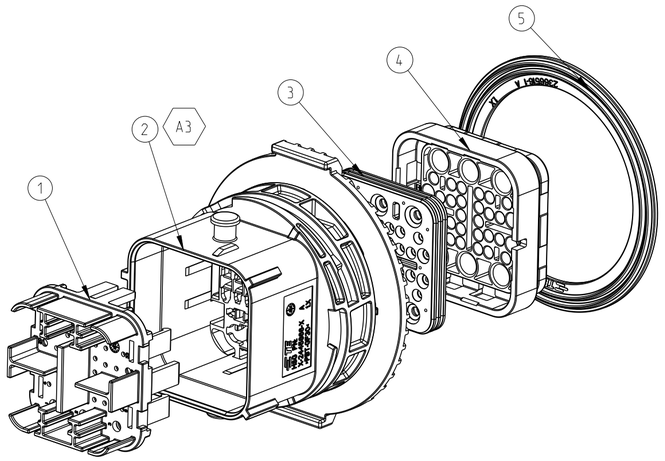

10. FOR FLANGE VERTION 1-2445860-1/2/3/4.THE RECOMMENDED FIX RING AND PANEL CUTOUT DIMENSIONS REFER TO C-DRAWING 2366517.

4.0	2366517-4
3.5	2366517-3
3.0	2366517-2
1.5	2366517-1
WALL THICKNESS DIM A	PN OF FIX RING

1	1	1	1	RUST RED	VMQ	FACIAL SEAL	5
1	-	-	-	BLUE	PBT-GF30	REAR CAP	4
-	1	-	-	GREEN			
-	-	1	-	GREY			
-	-	-	1	BLACK			
1	1	1	1	RUST RED	VMQ	GROMMET	3
1	-	-	-	BLUE	PBT-GF30	HOUSING CODING D	2
-	1	-	-	GREEN		HOUSING CODING C	
-	-	1	-	GREY		HOUSING CODING B	
-	-	-	1	BLACK		HOUSING CODING A	
1	1	1	1	YELLOW	PBT-GF30	TPA	1
QTY. REQUEST PER ASSY				COLOR	MATERIAL	DESCRIPTION	ITEM NO
A	A	A	A	REVISION OF EACH ASSY PN			
1--4	1--3	1--2	1--1	TE ASSEMBLY PN			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH -

DWN J.SHANG 10JAN2023
CHK C.W AN 10JAN2023
APVD Z.ZHOU 10JAN2023
PRODUCT SPEC 108-101662
APPLICATION SPEC 114-32209
WEIGHT -

TE Connectivity

NAME NTS 36P REC HSG ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2445860	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 2 OF 2 | REV A3