



Product Features

- ◆ Universal input voltage 90~305Vac;
- ◆ Constant voltage output;
- ◆ High power factor >0.96(230Vac& full load);
- ◆ Overall protection: SCP, OVP, OTP, OCP;
- ◆ Surge immunity: line-line 5KV, line-earth 10KV;
- ◆ IP67 design for indoor and outdoor applications;
- ◆ Suitable for dry / damp / wet locations;
- ◆ 5 years warranty.

Application

- ◆ Suitable for landscape lighting.

DESCRIPTION

LSV-320 series is constant voltage led driver, designed for lighting used for landscape illumination. The driver has built-in active PFC, multiple protections, and 10KV surge immunity. It's an excellent design with high reliability and long lifetime. 12V, 24V, 36V, 48V output voltage.

MODELS

Model Number	Max Output Power (W)	Output Voltage Range (Vdc)	Output Current Range (A)	Output Mode	Typical Efficiency	Power Factor	
						115Vac	230Vac
LSV-320B012	264	12	0~22.00	CV	91%	0.99	0.96
LSV-320B024	320	24	0~13.33	CV	92%	0.99	0.96
LSV-320B036	320	36	0~8.90	CC+CV	92%	0.99	0.96
LSV-320B048	320	48	0~6.67	CC+CV	92%	0.99	0.96

Notes:

All performance parameters are measured at 25°C ambient temperature, 230VAC input, full load conditions, except for those specified

INPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90Vac	100-277Vac	305Vac	
Input Frequency	47HZ	50/60	63Hz	
Leakage Current	-	-	0.75mA	277Vac/50Hz
Input AC Current	-	-	4.0A	100-277Vac & full load
Inrush Current(A)	-	-	75A	Cold start, 230Vac & full load
Power Factor	0.95	0.97	-	230Vac, 100% load
THD	-	-	20%	277Vac, 75~100% load

OUTPUT SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%	-	5%	Full load
Output Ripple Voltage	-	-	6%	Full load, Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor.
Output overshoot	-	-	10%	When the power is on
Line Regulation	-	-	3%	25°C±10°C ambient temperature, input voltage changes from 90Vac to 305Vac.
Load Regulation	-	-	3%	25°C±10°C ambient temperature, 230Vac input, load changes from 50% to 100%.
Turn-on Delay Time	-	-	3S	115Vac, 100% load
	-	-	3S	230Vac, 100% load

GENERAL SPECIFICATIONS

Parameter		Min.	Typ.	Max.	Notes
Efficiency @115Vac Vo=12V Vo=24V Vo=36V Vo=48V		87% 88% 88% 89%	89% 90% 90% 91%		Measured at full load and 25°C ambient temperature
Efficiency@230Vac Vo=12V Vo=24V Vo=36V Vo=48V		89% 90% 90% 92%	91% 92% 91% 94%		Measured at full load and 25°C ambient temperature
Efficiency@277Vac Vo=12V Vo=24V Vo=36V Vo=48V		89% 90% 90% 92%	91% 92% 91% 94%		Measured at full load and 25°C ambient temperature
Dielectric Strength	Input-Output	-	3750Vac	-	10mA/60S
	Input-PE	-	1650Vac	-	
	Output- PE	-	1650Vac	-	
Grounding Resistance		-	-	0.1Ω	25A/60S
Insulation Resistance		10MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60S/25°C / 70%RH
MTBF		-	200000 Hours	-	230Vac, 80% load (MIL-HDBK-217F)
Lifetime		-	50000 Hours	-	230Vac & 100% load, 70°C case temperature, refer to lifetime VS Tc curve for details
Operating Case Temperature for Safety Tc_s		-40°C	-	+85°C	
Operating Case Temperature for Warranty Tc_w		-40°C	-	+70°C	
Storage Temperature		-40°C	-	+85°C	Humidity: 20% to 95% RH
Dimensions (L×W×H)mm		234*98*40mm			
Net Weight		1750±50g/PCS			
Package		L500*W370*H160mm; 8PCS/Ctn,			

SAFTY STANDARDS

Safety Category	Country / Territory	Standards	Approved
CCC	China	GB19510.1, GB19510.14	√
CE	Europe	EN61347-1, EN61347-2-13	√
		EN62493	√
ENEC		EN62384	√
CB	CB Countries	IEC61347-1, IEC61347-2-13	√
BIS	India	IS 15885(PART 2/SEC 13)	√
UL	USA	UL 8750	√
CUL	Canada	CSA C22.2 No.250.13	√
KC	South Korea	K61347-1, K61347-2-13	
PSE	Japan	J61347-1, J61347-2-13	
SAA	Australia	AS/NZS IEC 61347.2.13	√
		AS/NZS 61347.1	√


EMC COMPLIANCE

EMC Category	Country / Territory	Standards	Approved
CCC	China	GB/T 17743, GB 17625.1	√
CE	Europe	EN 55015	√
		EN 61000-3-2, EN 61000-3-3	√
		EN61000-4-2,3,4,5,6,11	√
		EN 61547	√
KC	South Korea	K61547	
		K00015	
PSE	Japan	J55015	
FCC	USA	FCC part 15	

NOTE:


This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

INRUSH CURRENT WAVEFORM

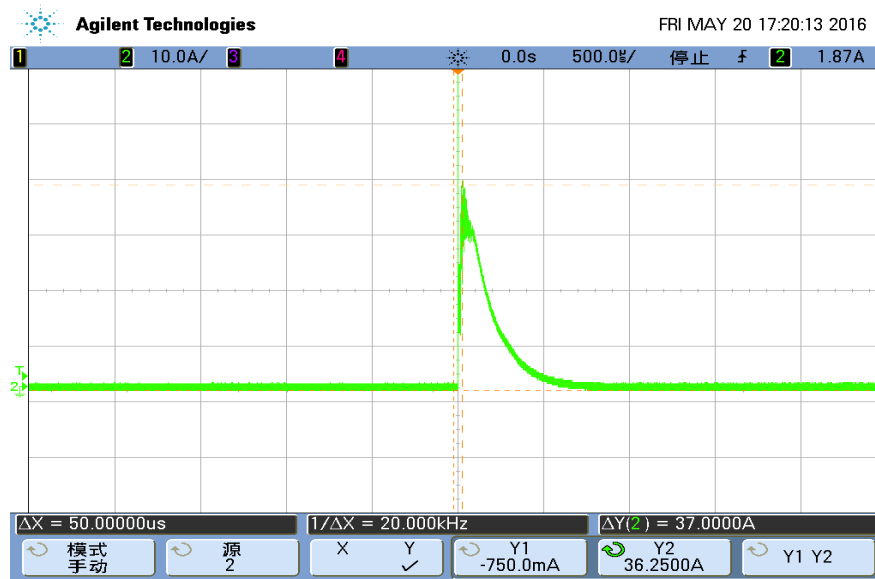


Derating Curve


Temperature vs. Load curve

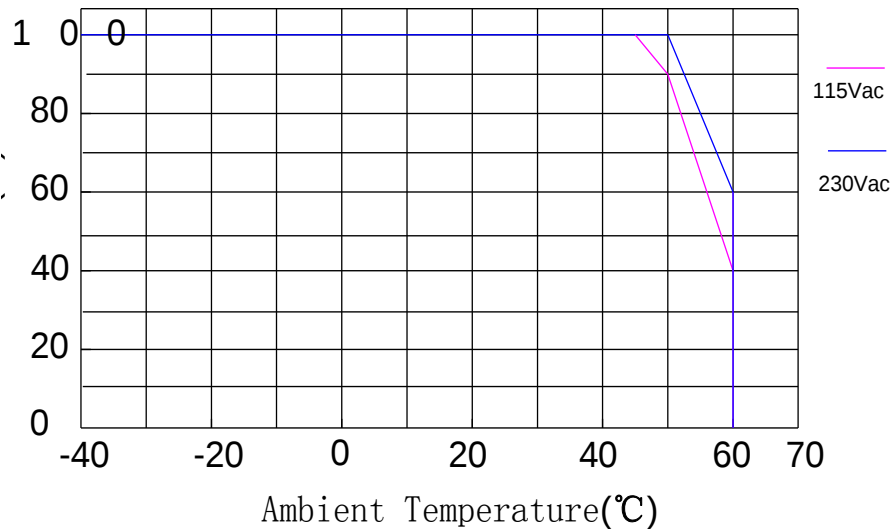

OUTPUT POWER VS INPUT VOLTAGE

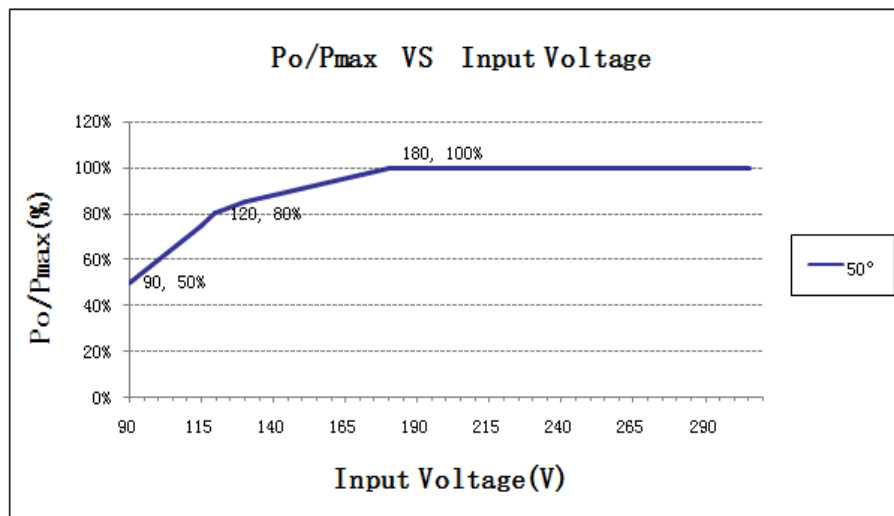


LIFETIME VS CASE TEMPERATURE

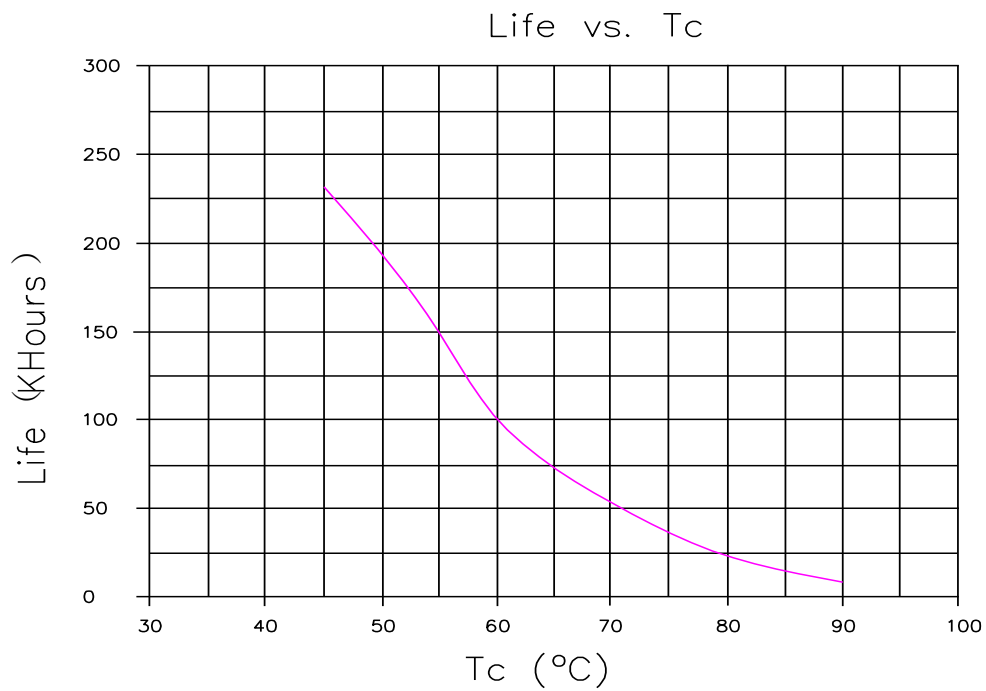


EFFICIENCY VS LOAD


LSV-320B012

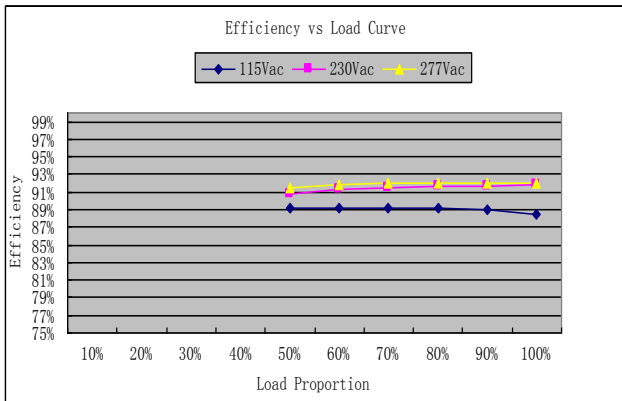


LSV-320B024

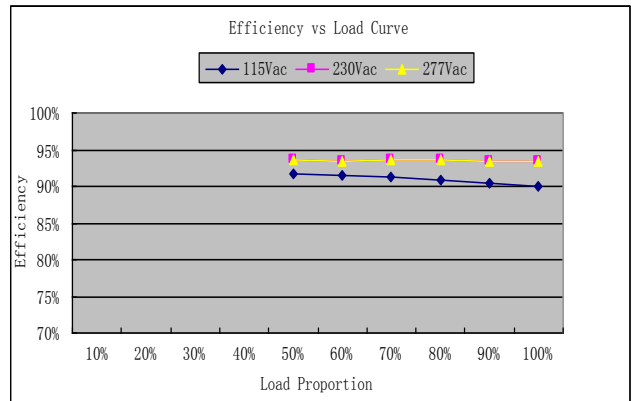


LSV-320B036

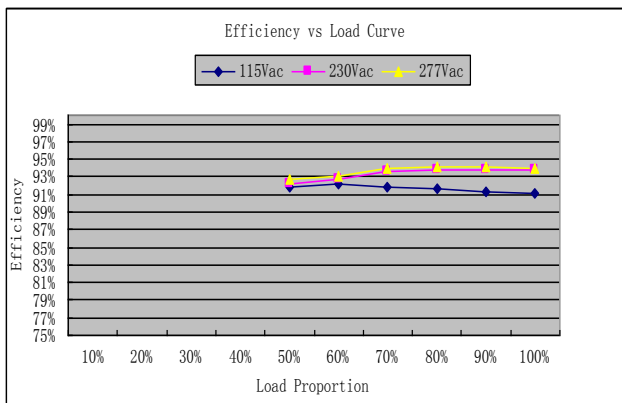


LSV-320B048

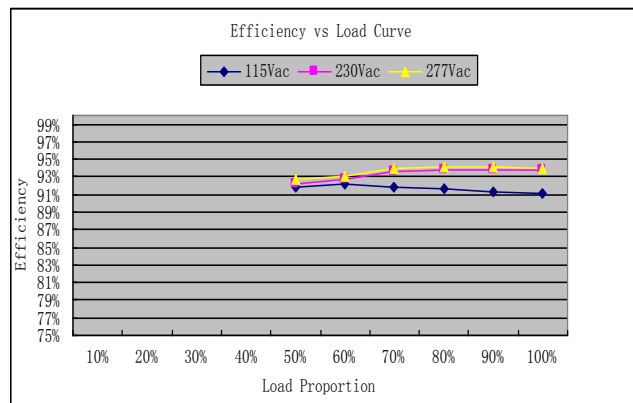

POWER FACTOR VS LOAD

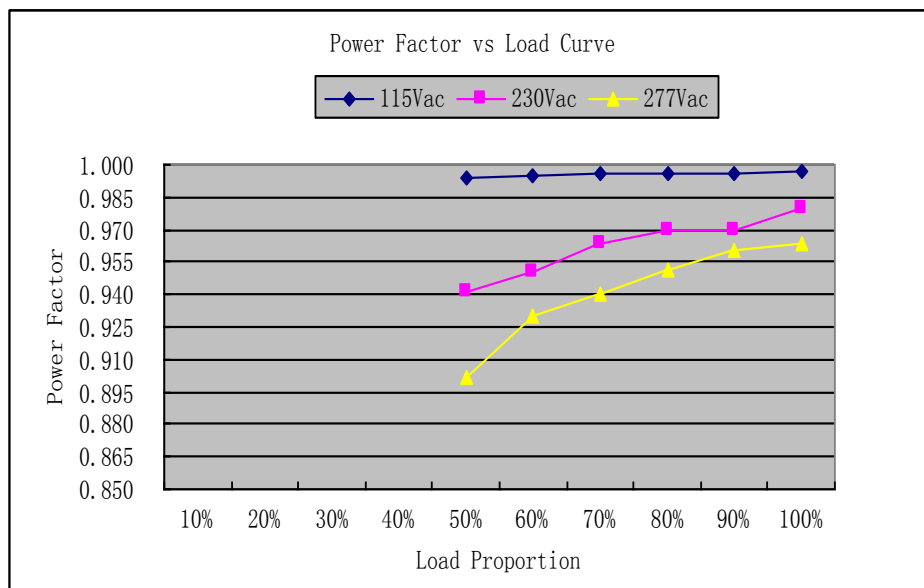


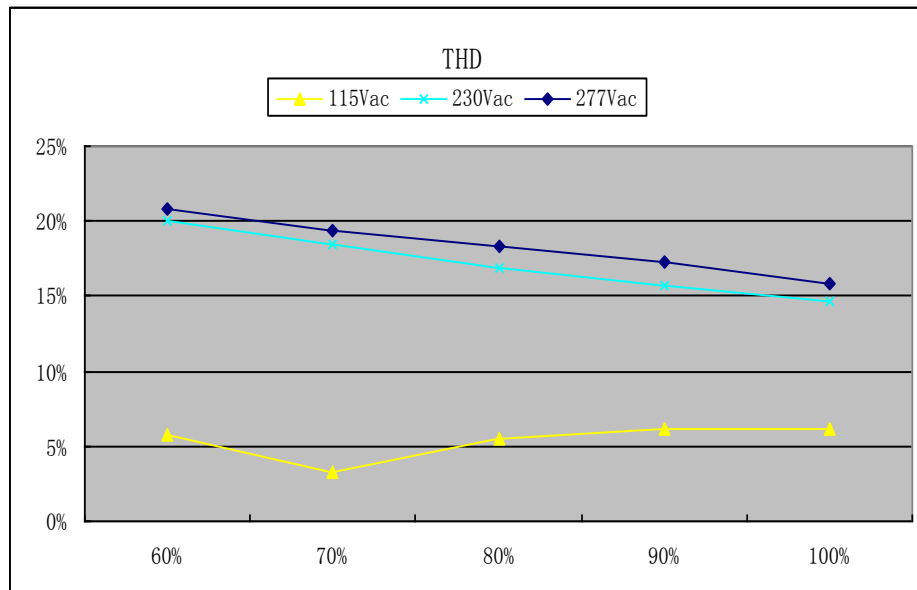TOTAL HARMONIC DISTORTION

PROTECTIONS


Parameter	Notes
Over Temperature Protection	When the Tc is over 90℃, the driver shuts off automatically and enters protection status.
Short Circuit Protection	The input power shall decrease when the output rail short, the power supply shall not be damaged.
Over current protection	The product will enter hiccup status when 1.1-1.5 maximum load current applied to the output, and the product shall be self-recovery when the fault condition is removed.
Over Voltage Protection	When the output voltage is over 1.1-1.3 Rated Load Voltage, the driver shuts off automatically and enters protection status, the driver will work normally after fault condition removed and AC input reapply.

MECHANICAL OUTLINE

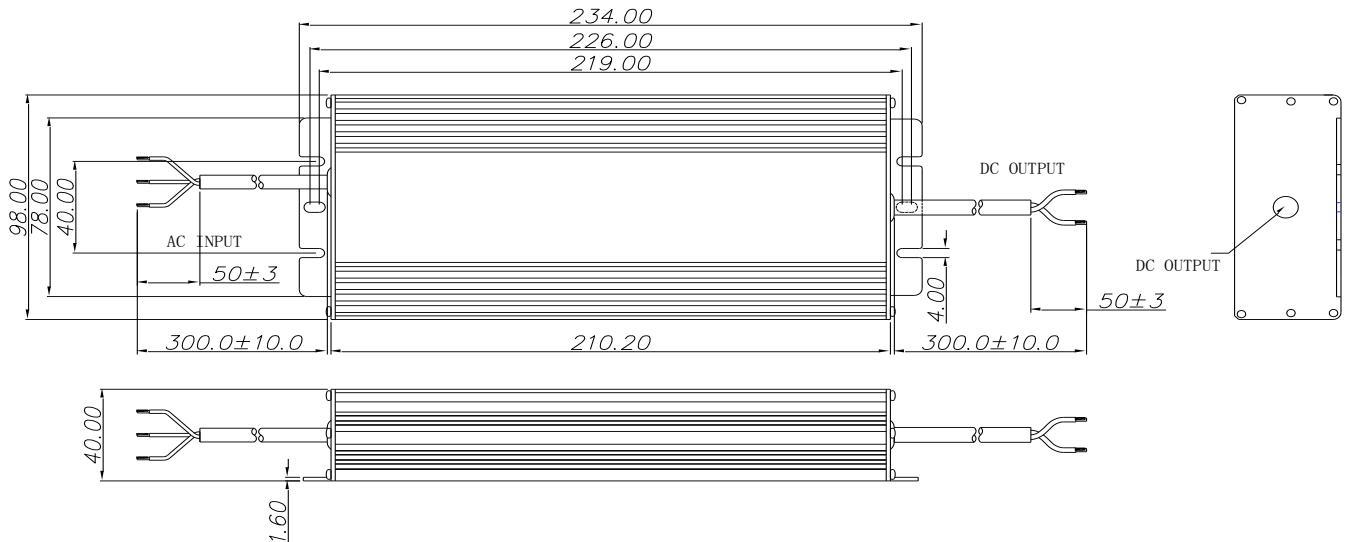
LSV-320B012types



LSV-320B024 types

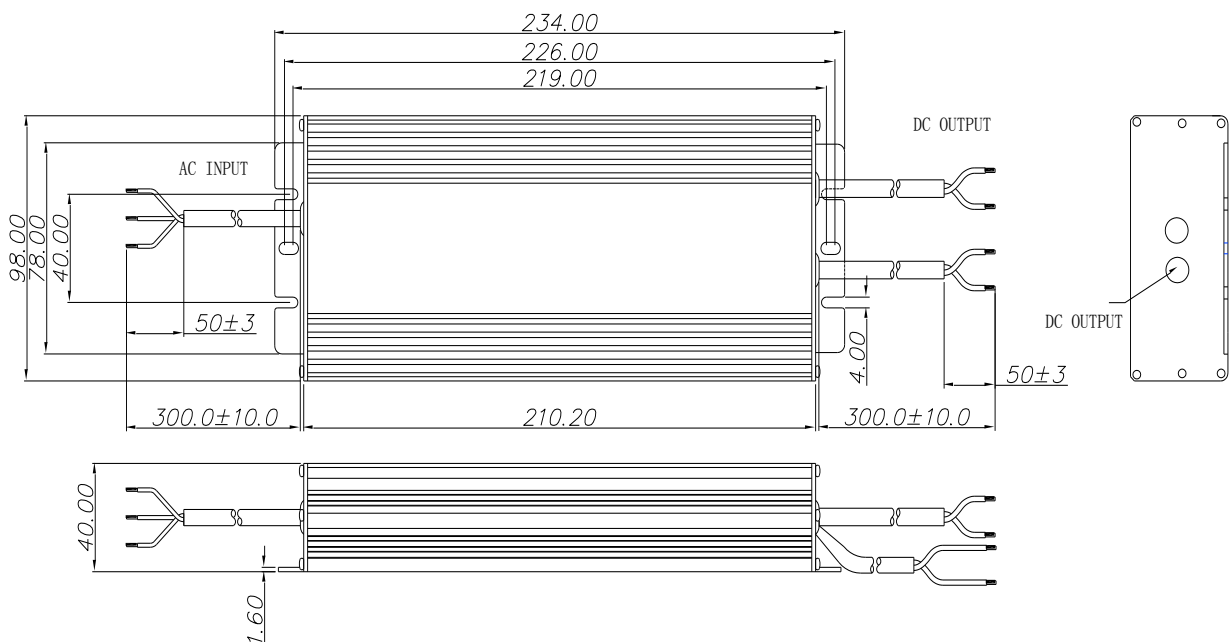

LSV-320B036& LSV-320B 048 types

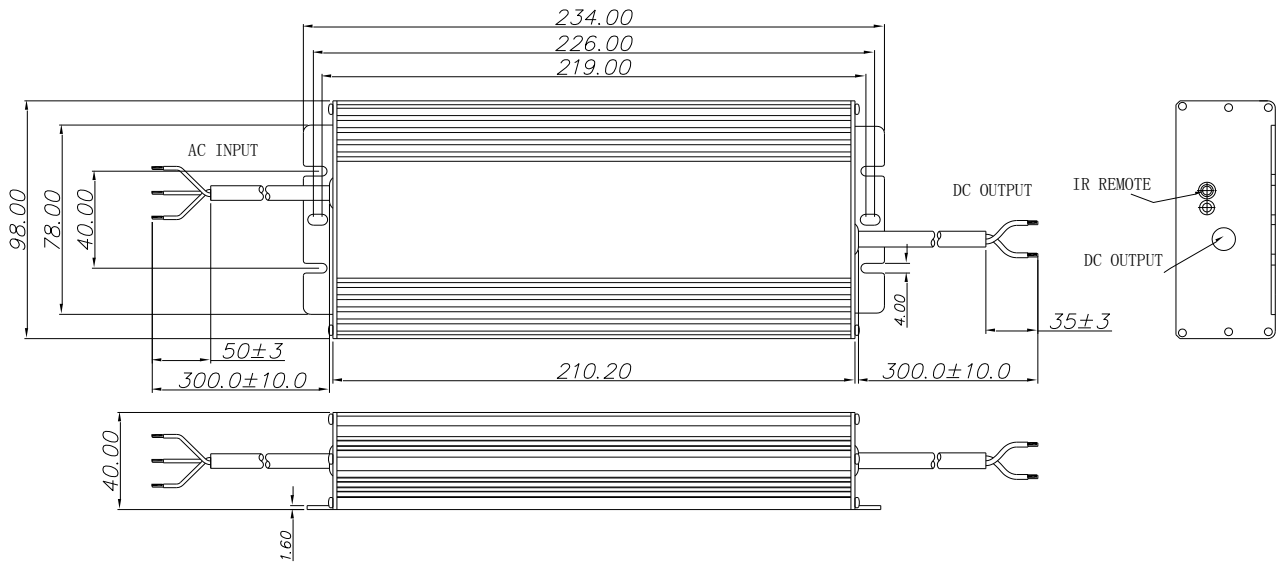

Wire	Specification	Note
AC Input	CCC+VDE 3x1.0mm ² L=300mm	for CE
	18AWG 3C L=300mm	for UL
DC Output	CCC+VDE 2x2.5mm ² L=300mm	for 12V CE
	CCC+VDE 2x1.0mm ² L=300mm	for 24V CE
	CCC+VDE 2x1.5mm ² L=300mm	for 36V&48V CE
	14AWG 2C L=300mm	for 12V UL
	18AWG 2C L=300mm	for 24 UL
	16AWG 2C L=300mm	for 36V&48V UL

[illegible]